

Features

- $V_{DS} = 20V, I_D = 0.7A$
- $R_{DS(ON)} < 280m\Omega @ V_{GS}=4.5V$
- $R_{DS(ON)} < 330m\Omega @ V_{GS}=2.5V$
- ESD Protection

Application


- Load/Power Switching
- Interfacing Switching
- Battery Management for Ultra Small Portable Electronics
- Logic Level Shift

Package and Pin Configuration

Circuit diagram



SOT-523



Marking: A Or C


Absolute Maximum Ratings ($T_A=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	± 8	V
Continuous Drain Current	I_D	0.7	A
Pulsed Drain Current ($t=300\mu s$) ⁽¹⁾	I_{DM}	1.8	A
Power Dissipation ⁽²⁾	P_D	280	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	452	$^\circ C/W$
Junction Temperature	T_J	150	$^\circ C$
Storage Temperature	T_{STG}	-55~+150	$^\circ C$


Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$	20			V
Zero gate voltage drain current	I_{DSS}	$V_{\text{DS}} = 20\text{V}, V_{\text{GS}} = 0\text{V}$			1	μA
Gate-body leakage current	I_{GSS}	$V_{\text{GS}} = \pm 8\text{V}, V_{\text{DS}} = 0\text{V}$			± 10	μA
Gate threshold voltage ⁽³⁾	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250\mu\text{A}$	0.5	0.75	1.1	V
Drain-source on-resistance ⁽³⁾	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}} = 4.5\text{V}, I_D = 550\text{mA}$			280	$\text{m}\Omega$
		$V_{\text{GS}} = 2.5\text{V}, I_D = 450\text{mA}$			330	
Forward transconductance	g_{FS}	$V_{\text{DS}} = 5\text{V}, I_D = 500\text{mA}$		1.7		S
Dynamic characteristics⁽⁴⁾						
Input Capacitance	C_{iss}	$V_{\text{DS}} = 16\text{V}, V_{\text{GS}} = 0\text{V}, f = 1\text{MHz}$			120	pF
Output Capacitance	C_{oss}				20	
Reverse Transfer Capacitance	C_{rss}				15	
Switching Characteristics⁽⁴⁾						
Turn-on delay time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = 10\text{V}, I_D = 500\text{mA}, V_{\text{GS}} = 4.5\text{V}, R_G = 10\Omega$		6.7		ns
Turn-on rise time	t_r			4.8		
Turn-off delay time	$t_{\text{d}(\text{off})}$			17.3		
Turn-off fall time	t_f			7.4		
Source-Drain Diode characteristics						
Diode Forward voltage ⁽³⁾	V_{DS}	$I_S = 0.15\text{A}, V_{\text{GS}} = 0\text{V}$			1.2	V

SOT523 Package Outline Drawing

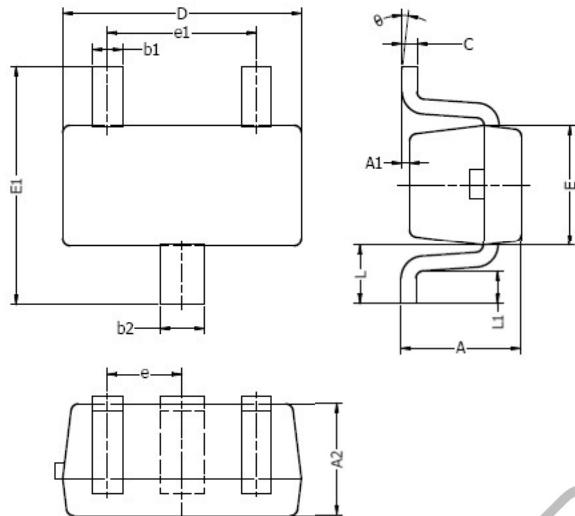

Suggested Land Pattern



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.70	0.90	0.028	0.035
A1	0.00	0.10	0.000	0.004
A2	0.70	0.80	0.028	0.031
b1	0.15	0.25	0.006	0.010
b2	0.25	0.35	0.010	0.014
c	0.10	0.20	0.004	0.008
D	1.50	1.70	0.059	0.067
E	0.70	0.90	0.028	0.035
E1	1.45	1.75	0.057	0.069
e	0.50 TYP.		0.020 TYP.	
e1	0.90	1.10	0.035	0.043
L	0.40 REF.		0.016 REF.	
L1	0.10	0.30	0.004	0.012
θ	0°	8°	0°	8°

NOTES www.techpublic.com.tw

1. Above package outline conforms to JEITA EAJ ED-7500A SC-75A.
2. Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [NTNS3A92PZT5G](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [2SK2464-TL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [AOD464](#)
[2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#)
[IPP60R600P6XKSA1](#) [RJK60S5DPK-M0#T0](#) [PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#)
[EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN61D9UWQ-13](#)
[US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [STU5N65M6](#) [C3M0021120D](#) [DMN13M9UCA6-7](#) [BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#)
[IRF40SC240ARMA1](#)