



TECH PUBLIC

台电电子

TP5108E Series

500mA Higt PSRR Voltage Reaulators

[www.sot23.com.tw](http://www.sot23.com.tw)

## General Description

The TP5108E is a high-performance, 500mA LDO regulator, offering extremely high PSRR and ultra-low dropout. Ideal for portable RF and wireless applications with demanding performance and space requirements.

The TP5108E is available in 5pin SOT23-5 Package .the output standards of 1.2V 1.5V 1.8V 2.5V 2.8V 3.0V 3.3V

## Features

- Quiescent Current: 80uA
- PSRR:72dB@1KHz
- < 1uA current at shutdown mode
- Output voltage accuracy: tolerance  $\pm 2\%$
- Output current:500mA(Typ.)
- SOT23-5 package

## Applications

- CDM/GSM mobile phone
- PDAs /MP3
- Audio/Video equipment


## Ordering Information

TP5108E23E-33


Output voltage: 33=3.3V  
50=5.0V  
28=2.8V  
30=3.0V  
XX=X.XV

23E:SOT23-5 Package

## BLOCK DIAGRAM

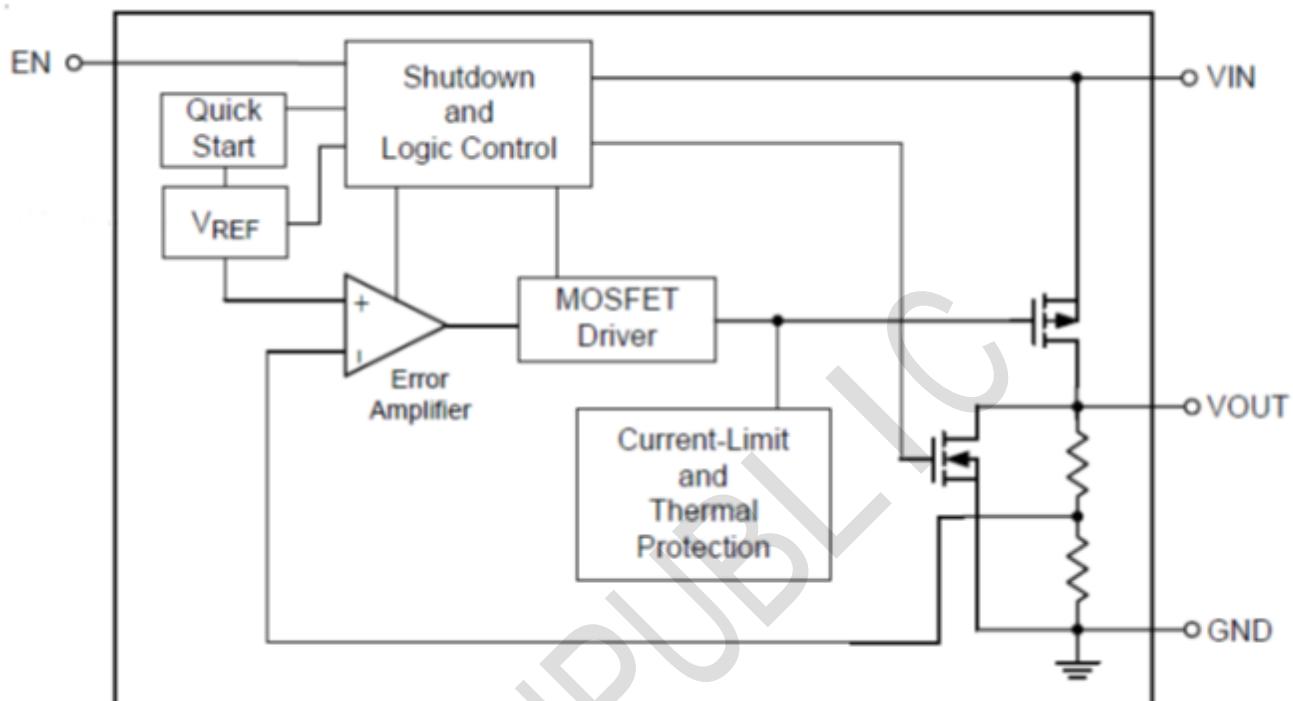

## PIN CONFIGURATION

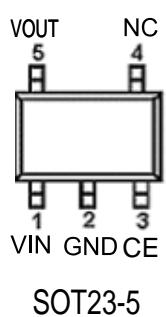

| Pin Name | Function       |
|----------|----------------|
| VIN      | Supply power   |
| GND      | Ground         |
| CE       | Enable pin     |
| NC       | NC             |
| VOUT     | Voltage output |



TECH PUBLIC

台电电子

TP5108E Series  
500mA Higt PSRR Voltage Reaulators

www.sot23.com.tw

**Absolute Maximum Rating** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

| Parameter                     | Symbol    | Maximum Rating               |     | Unit                   |
|-------------------------------|-----------|------------------------------|-----|------------------------|
| Input Voltage                 | $V_{IN}$  | 7                            |     | V                      |
| Output Voltage                | $V_{OUT}$ | $V_{SS}-0.3 \sim V_{IN}+0.3$ |     |                        |
| Output Current                | $I_{out}$ | 600                          |     | mA                     |
| Power Dissipation             | $P_D$     | SOT-23-5                     | 250 | mW<br>$^\circ\text{C}$ |
| Operating Ambient Temperature | $T_{opr}$ | -40~+85                      |     |                        |
| Storage Temperature           | $T_{stg}$ | -40~+125                     |     |                        |

**Electrical Characteristics** ( $T = 25^\circ\text{C}$  unless otherwise noted)

(Vin=Vout+1V,Cin=Cout=1uF,Ta=25°C)

| PARAMETER                   | SYMBOL   | CONDITIONS   | MIN    | TYP                      | MAX    | UNITS          |
|-----------------------------|--|--|--------|--------------------------|--------|----------------|
| Output Voltage              | $V_{OUT}(E)$<br>(Note 2)                             | $I_{OUT}=40\text{mA}$ ,<br>$V_{IN}=V_{out}+1\text{V}$                                  | X 0.98 | $V_{OUT}(T)$<br>(Note 1) | X 1.02 | V              |
| Input Voltage               | $V_{IN}$   |  |        |                          | 7.0    | V              |
| Max. Output Current         | $I_{OUTmax}$   | $V_{IN}=V_{out}+1\text{V}$   |        | 500                      |        | mA             |
| CE Enable Voltage           | $V_{CE}$   | $V_{IN}=V_{out}+1\text{V}$   |        | 1.1                      |        | V              |
| Load Regulation             | $\Delta V_{OUT}$                                     | $V_{IN}=V_{out}+1\text{V}$ ,<br>$1\text{mA} \leq I_{OUT} \leq 100\text{mA}$            |        | 50                       |        | mV             |
| Dropout Voltage<br>(Note 3) | $V_{dif1}$   | $I_{OUT} = 100\text{mA}$   |        | 100                      |        | mV             |
|                             | $V_{dif2}$   | $I_{OUT} = 200\text{mA}$   |        | 300                      |        | mV             |
| Supply Current              | $I_{SS}$   | $V_{IN}=V_{out}+1\text{V}$   |        | 80                       |        | $\mu\text{A}$  |
| Standby Current             | $I_{CEL}$  | $V_{ce}=0\text{V}$   |        | 1                        |        | $\mu\text{A}$  |
| Line Regulation             | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$ | $I_{OUT} = 40\text{mA}$<br>$V_{out}+1\text{V} \leq V_{IN} \leq 8\text{V}$              |        | 0.03                     |        | %/V            |
| Output Noise                | en   | $I_{OUT} = 40\text{mA}$ ,<br>300Hz~50kHz   |        | 50                       |        | $\text{uVrms}$ |
| Ripple Rejection Rate       | PSRR   | $V_{in} = [V_{out}+1]\text{V}$<br>+1Vp-pAC<br>$I_{OUT} = 40\text{mA}, f = 1\text{kHz}$ |        | 70                       |        | dB             |




TECH PUBLIC  
台舟电子

TP5108E Series  
500mA Higt PSRR Voltage Reaulators


[www.sot23.com.tw](http://www.sot23.com.tw)

## TYPICAL APPLICATION

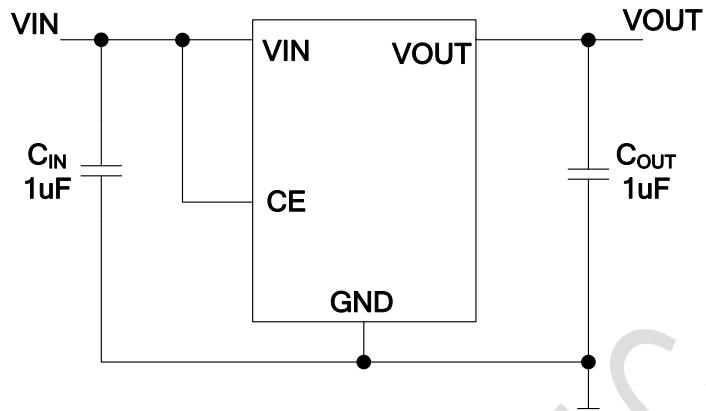

## Package information

SOT23-5

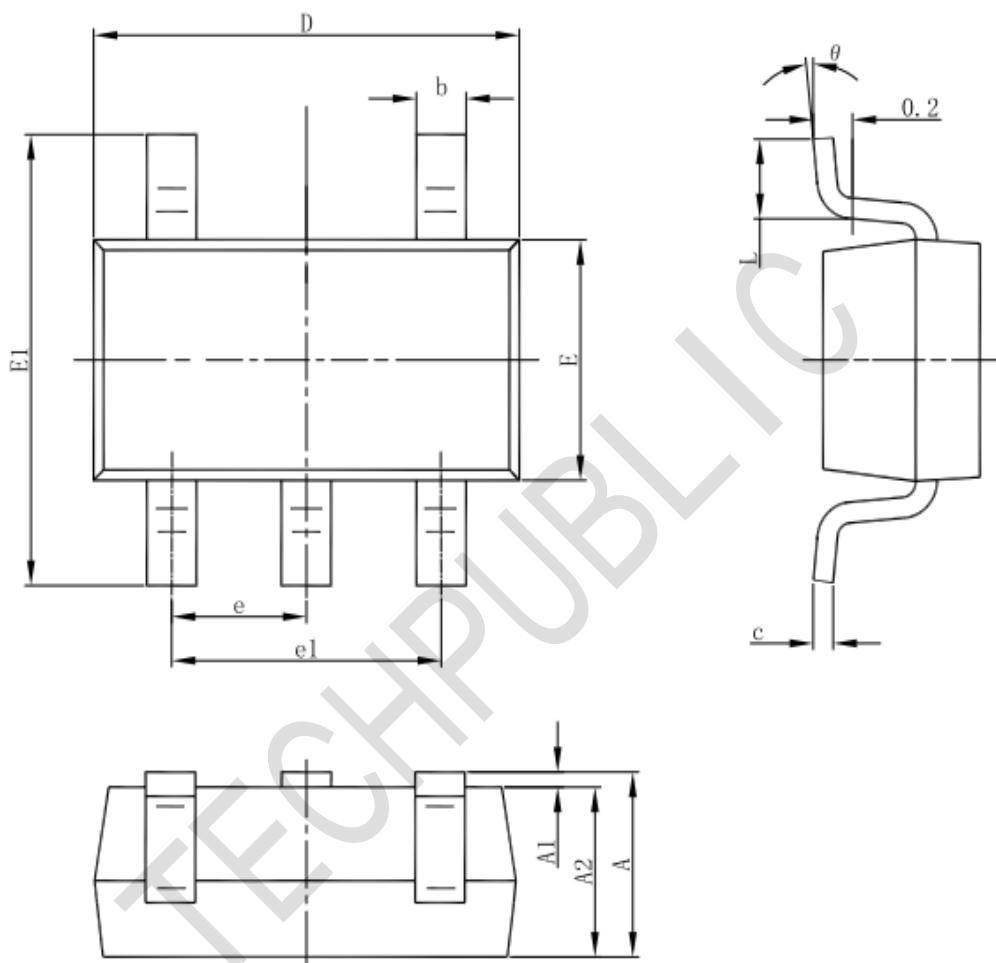

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 1.050                     | 1.250 | 0.041                | 0.049 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 1.050                     | 1.150 | 0.041                | 0.045 |
| b      | 0.300                     | 0.500 | 0.012                | 0.020 |
| c      | 0.100                     | 0.200 | 0.004                | 0.008 |
| D      | 2.820                     | 3.020 | 0.111                | 0.119 |
| E      | 1.500                     | 1.700 | 0.059                | 0.067 |
| E1     | 2.650                     | 2.950 | 0.104                | 0.116 |
| e      | 0.950(BSC)                |       | 0.037(BSC)           |       |
| e1     | 1.800                     | 2.000 | 0.071                | 0.079 |
| L      | 0.300                     | 0.600 | 0.012                | 0.024 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Linear Voltage Regulators](#) category:***

***Click to view products by [TECH PUBLIC](#) manufacturer:***

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [636416C](#) [714954EB](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L78M15CV-DG](#) [TLS202B1MBV33HTSA1](#) [L79M05T-E](#) [TLS202A1MBVHTSA1](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [MP2018GZD-5-Z](#) [MP2018GZD-33-Z](#) [MIC5281-3.3YMM](#) [RT9078-28GQZ](#) [MC78L06BP-AP](#) [TA48LS05F\(TE85L,F\)](#) [TA78L12F\(TE12L,F\)](#) [TC47BR5003ECT](#) [TCR2LN12,LF\(S](#) [TCR2LN28,LF\(S](#) [TCR2LN30,LF\(S](#) [TCR3DF295,LM\(CT](#) [TCR3DF40,LM\(CT](#) [BA178M20CP-E2](#) [L78M12ABDT](#) [LM7812SX/NOPB](#) [LR645N3-G-P003](#) [LR645N3-G-P013](#) [ZXTR2005P5-13](#) [SCD7812BTG](#) [TCR3DF335,LM\(CT](#) [ZXTR2012K-13](#) [TLE42994E](#) [V33](#) [ZXTR2008K-13](#) [ZXTR2005K-13](#) [LA5693D-E](#) [L88R05DL-E](#) [ADP3300ARTZ-2.7RL7](#)