

### Features

- 2 $\mu$ A Ground Current at no Load
- $\pm 2\%$  Output Accuracy
- 200mA Output Current
- Wide Operating Input Voltage Range: 3V to 36V
- Support Fixed Output Voltage 1.8V, 2.5V, 3.0V, 3.3V, 3.6V, 4.0V, 4.2V, 5.0V
- SOT-23-5 Package Available

### Applications

- Portable, Battery Powered Equipment
- Low Power Microcontrollers
- Laptop, Palmtops and PDAs
- Wireless Communication Equipment

### Ordering Information

#### **TPTLV70433DBVR**

DBVR:SOT23-5 Package

Output voltage: 12=1.2V

15=1.5V

18=1.8V


30=3.0V

33=3.3V

50=5.0V


30=3.0V  
33=3.3V  
50=5.0V  
A2=12V

## PIN CONFIGURATION

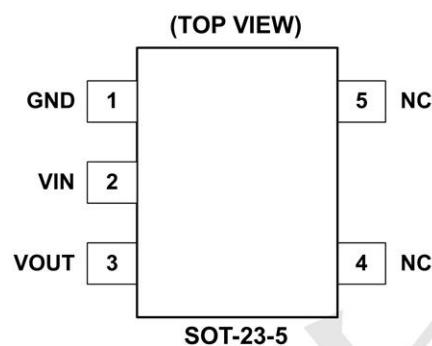


Pin Name	Pin Function
VIN	Power Input Voltage
GND	Ground
OUT	Output Voltage
NC	NO Connected
NC	NO Connected

## Typical Application Circuit

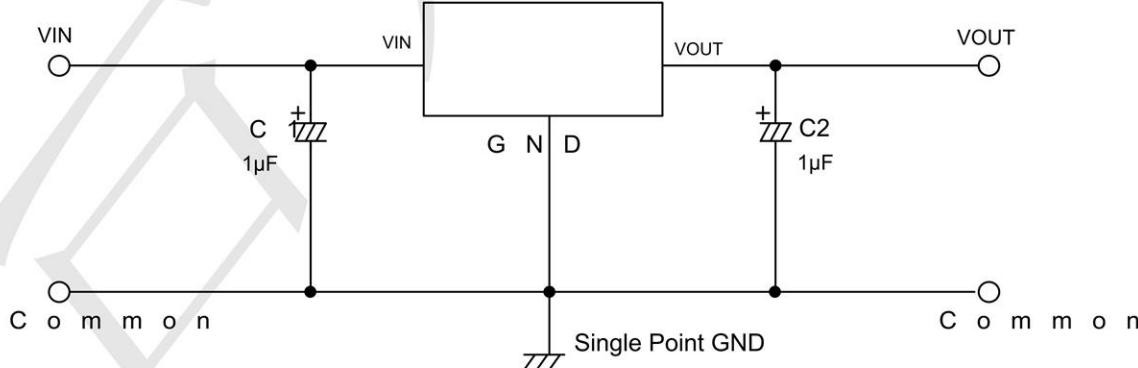

## BLOCK DIAGRAM

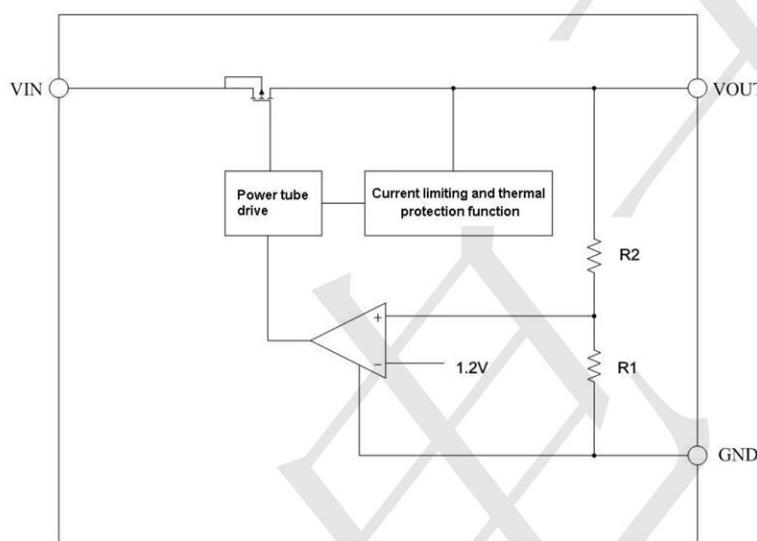

## Absolute Maximum Ratings

Parameter	Value	Unit
Supply Voltage	-0.3 ~ +40	V
	400	mW
Operating Junction Temperature	380 -40 ~ +125	°C/W °C
Storage Temperature Range	-65 ~ +150	°C
Lead Temperature (Soldering, 10 sec)	300	°C
ESD(HBM mode, ESDA/JEDECJS-001-2017)	+2000	V


### Electrical Characteristics

( $V_{IN}=V_{OUT}+2$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise noted.)


Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage	$V_{IN}$		3	--	36	V
Output Voltage Accuracy	$\Delta V_{OUT}$	$I_{OUT}=1mA$	-2	--	+2	%
Maximum Output Current	$I_{OUT(\text{Max})}$		150	--	--	mA
Quiescent Current	$I_Q$	$I_{OUT}=0mA$	--	2	--	uA
Dropout Voltage	$V_{DROP}$	$V_{OUT}=1.8V$	$I_{OUT}=150mA$	--	1250	mV
		$V_{OUT}=1.8V$	$I_{OUT}=100mA$	--	880	mV
		$V_{OUT}=2.5V$	$I_{OUT}=150mA$	--	1150	mV
		$V_{OUT}=2.5V$	$I_{OUT}=100mA$	--	800	mV
		$V_{OUT}=3.0V$	$I_{OUT}=150mA$	--	820	mV
		$V_{OUT}=3.0V$	$I_{OUT}=100mA$	--	530	mV
		$V_{OUT}=3.3V$	$I_{OUT}=150mA$	--	800	mV
		$V_{OUT}=3.3V$	$I_{OUT}=100mA$	--	520	mV
		$V_{OUT}=3.6V$	$I_{OUT}=150mA$	--	750	mV
		$V_{OUT}=3.6V$	$I_{OUT}=100mA$	--	500	mV
Line Regulation	$\Delta V_{LINE}$	$V_{IN}=V_{OUT}+2V \text{ to } 30V$ $I_{OUT}=10mA$	--	--	0.2	%/ $V$
Load Regulation	$\Delta V_{LOAD}$	$V_{IN}=V_{OUT}+2V$ , $1mA < I_{OUT} < 150mA$	--	25	60	mV
Short Current Protection	$I_{Short}$	OUT Short to GND	--	80	--	mA
Output Noise	$e_N$	10Hz to 100KHz $I_{OUT}=30mA$	--	120	--	$\mu V_{RMS}$
Power Supply Rejection Ratio	PSRR	$V_{IN}=12V$ , $I_{OUT}=1mA$	--	68	--	dB

### Typical Operating Characteristics


Line-Transient Response

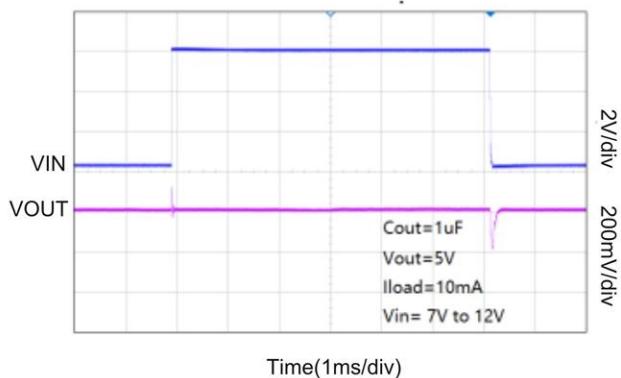


Line-Transient Response

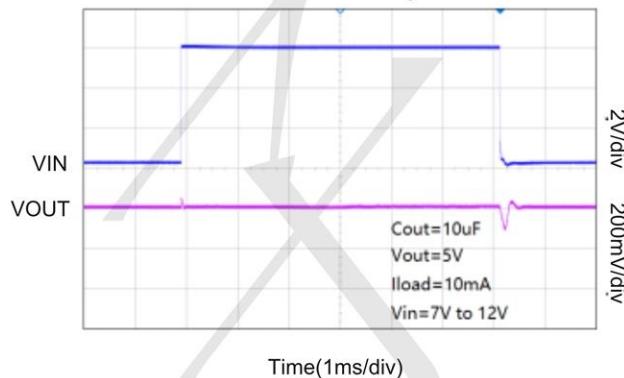


Load-Transient Response

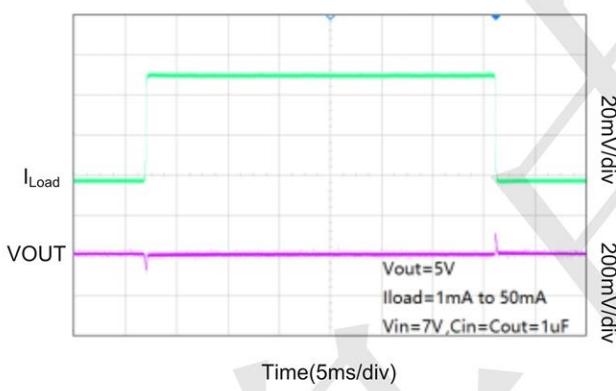


Load-Transient Response

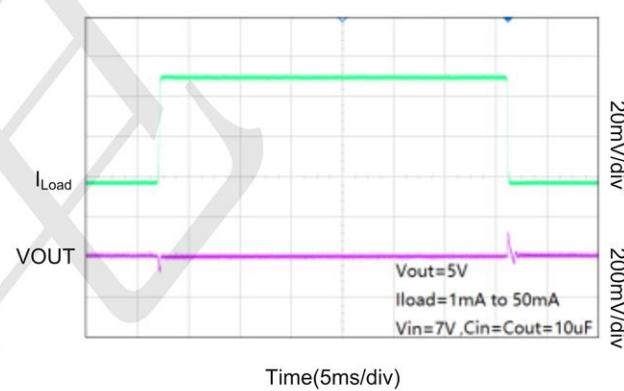

Start up Response

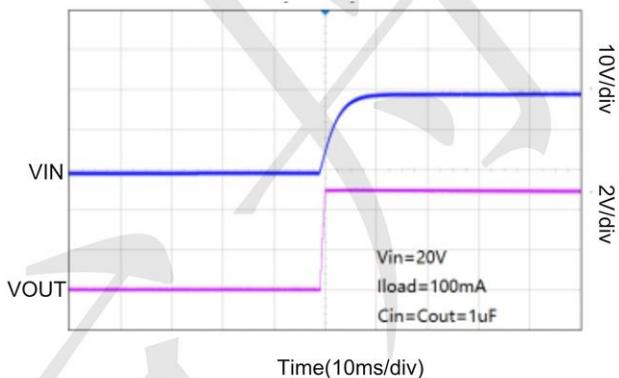


Start up Response

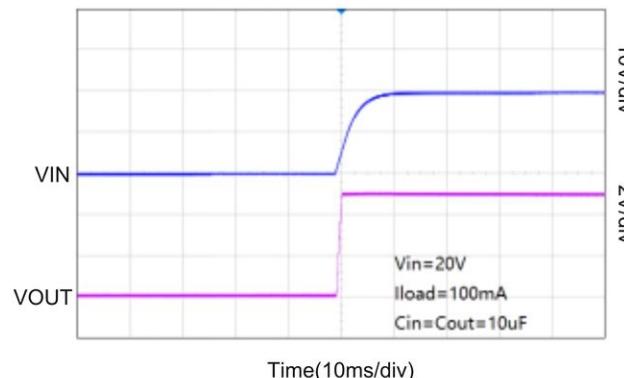

**Package information**

SOT23-5

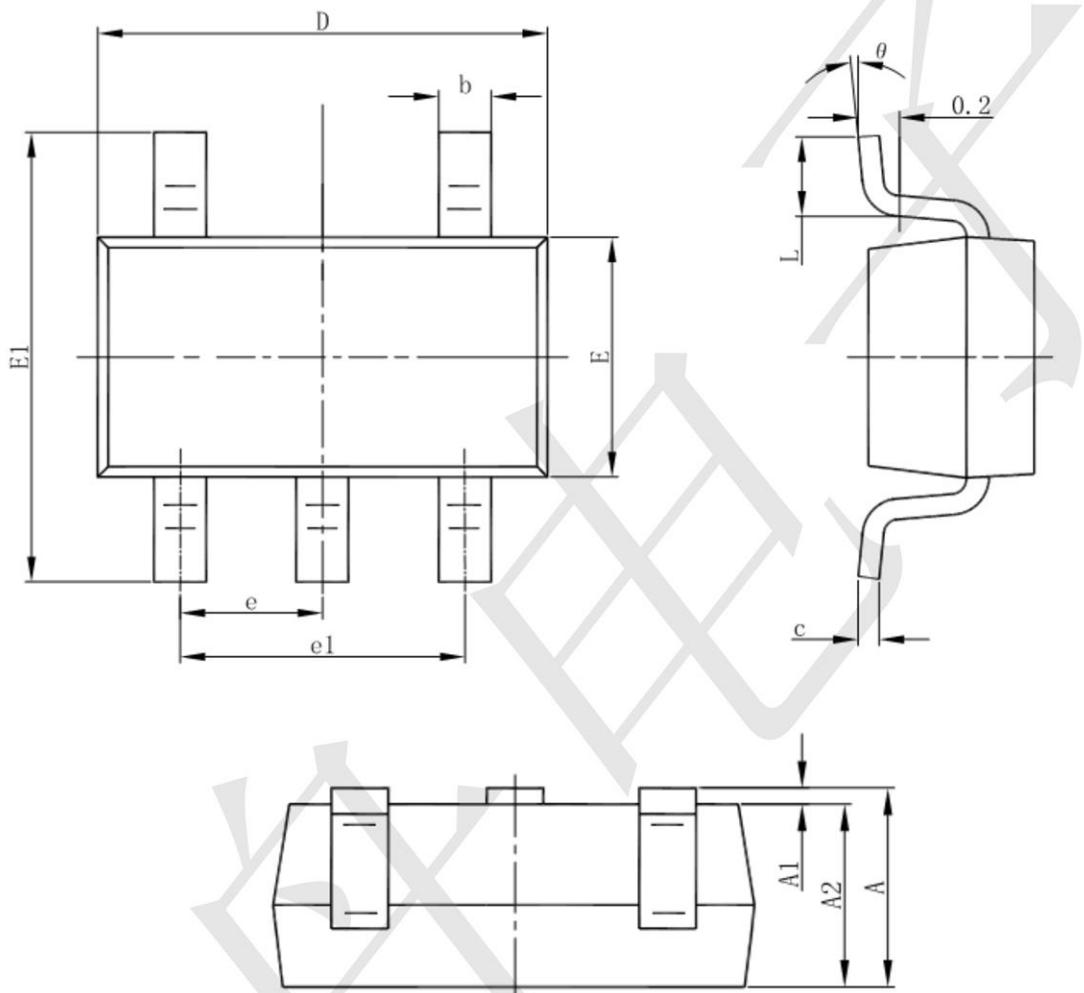

<b>Symbol</b>	<b>Dimensions In Millimeters</b>		<b>Dimensions In Inches</b>	
	<b>Min</b>	<b>Max</b>	<b>Min</b>	<b>Max</b>
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Linear Voltage Regulators](#) category:***

***Click to view products by [TECH PUBLIC](#) manufacturer:***

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [636416C](#) [714954EB](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L78M15CV-DG](#) [L79M05T-E](#) [TLS202A1MBVHTSA1](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [MP2018GZD-5-Z](#) [MP2018GZD-33-Z](#) [MIC5281-3.3YMM](#) [MC78L06BP-AP](#) [TA48LS05F\(TE85L,F\)](#) [TA78L12F\(TE12L,F\)](#) [TC47BR5003ECT](#) [TCR2LN12,LF\(S\)](#) [TCR2LN28,LF\(S\)](#) [TCR2LN30,LF\(S\)](#) [TCR3DF295,LM\(CT](#) [TCR3DF40,LM\(CT](#) [BA178M20CP-E2](#) [L78M12ABDT](#) [LM7812SX/NOPB](#) [LR645N3-G-P003](#) [LR645N3-G-P013](#) [ZXTR2005P5-13](#) [SCD7812BTG](#) [TCR3DF335,LM\(CT](#) [ZXTR2012K-13](#) [TLE42994E V33](#) [ZXTR2008K-13](#) [ZXTR2005K-13](#) [L88R05DL-E](#) [ADP3300ARTZ-2.7RL7](#) [LM120K-15/883](#) [IFX54441LDVXUMA1](#) [LM317D2T-TR](#)