

Compression Coax Board-to-Board RF Connector

Revised 04/06 1-1773441-2

DESCRIPTION

Board-to-Board RF Connector Series

- Single connector product
- Surface mount technology
- Excellent price-to-performance ratio

APPLICATIONS

- Modular parallel board-to-board blind mate applications
- Base Station / Sub Station systems
- PDA / PCS / Cellular Handset applications
- Wireless Communications systems
(GSM, PCS, WCDMA, UMTS)

KEY FEATURES

- Single connector design - no mating connectors needed
- Available in four sizes for varied board spacing: 14mm, 10mm, 6.65mm and 4mm
- Large radial and axial misalignment: For positioning both boards and for gap between boards
- Surface Mount Device for standard pick & place compatibility
- Gold plated phosphor bronze and brass contacts, stainless steel springs
- Mating directly on target board
- Easy connection without risk of breaking soldering or connector when mating or unmating
- Low applied material and assembly costs

**New product**

FOR MORE INFORMATION

Internet

<http://www.tycoelectronics.com/products/rfcoax>

Technical Support Center

Phone: 1-800-522-6752

Product Specification/Design Objectives: 108-71060

Test report: 501-90021

Sample kit: 1-1773441-3

EMEA Product Manager – Patrick Duquerroy

Phone: (49) 6182-4538

E-mail: pduquerroy@tycoelectronics.com

US Product Manager – Claude C. de Lorraine

Phone: 717-986-5793

E-mail: cdelorraine@tycoelectronics.com

Compression Coax Board-to-Board RF Connector


SPECIFICATIONS

Characteristic Impedance:	50 Ohms	
Frequency Range:	Up to 6 GHz	
Return Loss:	- 20dB min	up to 2.2 GHz (all misalignments)
Shielding Effectiveness:	- 60 dB min	up to 2.2 GHz
Working Voltage:	125 VAC, 50 Hz (at sea level)	
Diel. Withstanding Voltage:	500 VAC, 50 Hz (at sea level)	
Insulation Resistance:	100 Megohms	
Operating Temperature:	-40 to +125°C	
Mating Force:	10 N	
Durability:	25 cycles	
Angle between Boards:	± 2° max	
Axial Misalignment:	± 1.0mm	from nominal boards stacking height
	± 0.4mm, ± 0.3mm	for shortest models (P/Ns 619135 and 1658260)
Radial Misalignment:	± 0.8mm	from center line in any direction
Vibration:	20 g between 58-500 Hz	(Const. amplitude of 1.5 mm between 10-58 Hz)

PART NUMBERS

4 Versions:

<u>Part Number</u>	<u>Height "H"</u>
619127-1	14 ± 1.0mm
619134-1	10 ± 1.0mm
619135-1	6.65 ± 0.3mm
1658260-1	4 ± 0.3mm

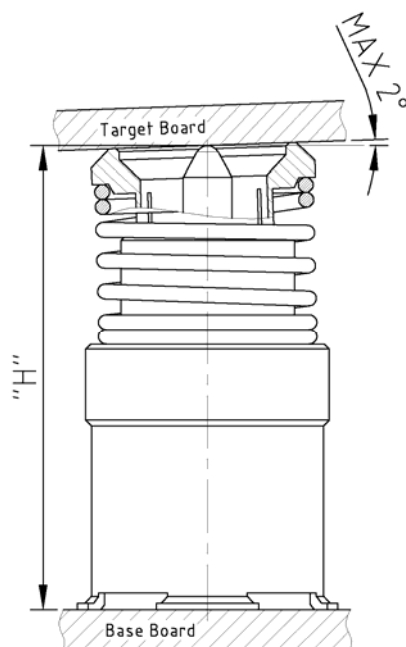

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68682-310LF](#) [68684-306](#) [75140-7012](#) [87471-650](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#) [AXE720127](#)