







PA27 wp

**Pillar Terminal Block
with Wire Protector
(12 poles)**




TECHNICAL DATA

	IEC Standards	American Standards	
Ratings	450V - 24A	300V - 15A	
Wire size	2.5 sqmm	18 ÷ 14AWG	
Working Temperature	- 5 ÷ 125°C (short time 155°C)	23 ÷ 221°F	
Plastic Material	Polyamide PA6.6 natural colour, UL94 V2		
Metal Parts	Cage insert made in nickel plated brass; M3 Captive screw made in zinc plated steel; Wire protector made in stainless steel		
Accessories	PA36 - PA37 - PA295 - PA228 - PA52 - PA197		
Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	CA02.01048	2.5 sqmm - 450V - 24A - 125°C	EN 60998-1; EN 60998-2-1
	CA02.01048	2.5 sqmm - 450V - 24A - 125°C	EN 60998-1; EN 60998-2-1
	40013746	2.5 sqmm - 450V - 24A - 125°C	DIN EN 60998-1; DIN EN 60998-1/A1; DIN EN 60998-2-1 (VDE 0613)
	E76048 vol. 1 sec. 1	18 ÷ 14 AWG - 300V - 15A - 105°C	UL 1059; CSA C22-2 N.158-1987

PACKAGING

Type	P-N	Pack.	Dim. Pack. (LxHxP)	Weight (Kg)
PA 27 WP/12P	PA27XA1F12P	500	40x20x40	16.5

DIMENSIONAL
DRAWING

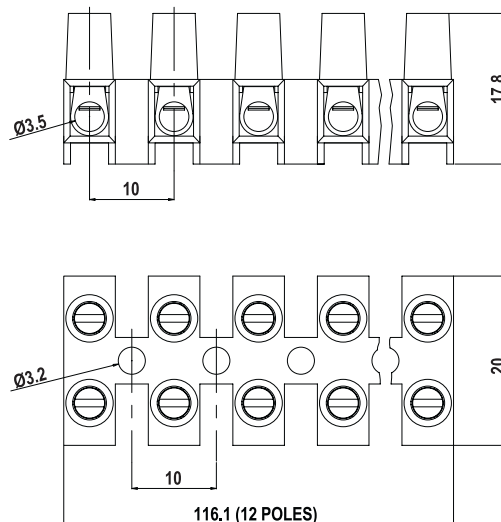

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [hylec manufacturer](#):

Other Similar products are found below :

[LN167001](#) [50.625 PA/3X7](#) [50.620 PA/R](#) [DESTB-1003](#) [THB.406.A1G](#) [THB.387.A4A.R](#) [K150-1032-00](#) [GHG9601955R0004](#) [K151-1032-00](#)
[HYKS-07612PP](#) [THB.382.A1A-KIT](#) [THB.390.A1AKIT](#) [THK.404.X2A00-F](#) [50.216 ES](#) [50.616M/EMVDL-F](#) [50.625 ES](#) [PA244SKIT](#)
[THB.387.A3A](#) [THB.405.A2A](#) [50.220 M-F](#) [HY435/12 FV](#) [THB110A6B-F](#) [50.216 M-F](#) [THB.387.B5A](#) [5625////1121](#) [THB.380.3ASSY](#)
[THB.405.A2G](#) [THA.209.A1A](#) [DESTB-1002](#) [THB.384.A1A](#) [K257-1012-00](#) [6000302CC](#) [TTK25BK-SD-F](#) [TTK20GY-SD-F](#) [DESTB-0403](#)
[THB.384.B1A](#) [50.625 PA/RSW](#) [HY508/3 V/3F](#) [5665/221](#) [THB.387.D4A](#) [THB.387.B4A](#) [THR.405.S5A](#) [THB.381.M2A](#) [THB.387.A5A](#)
[THB.387.C5A](#) [THB.387.D3A](#) [50.625 M/EMVDL-F](#) [THK.200.3T](#) [THB.381.A2A](#) [K160-1040-00](#)