



## CSG-UFFR-100-UFFR

### U.FL Plug to U.FL Plug Cable Assembly

The CSG-UFFR-100-UFFR cable assembly provides a U.FL/MHF1-type connection on 100 mm of 1.37 mm coaxial cable.

Operating from 0 Hz to 6 GHz, the CSG-UFFR- 100-UFFR cable assembly combines superior performance, compact size, and a convenient snap-on mating interface to provide a reliable, easy-to-use cable assembly. Additionally, all Linx coaxial cables and connectors meet RoHS lead free standards and are tested to meet requirements for corrosion resistance, vibration, mechanical and thermal shock.

#### FEATURES

- 0 Hz to 6 GHz operation
- U.FL-type plug (female socket)
  - Gold plated brass
  - Right-angle connection
- U.FL-type plug (female socket) compatible with
  - MHF1
  - AMC
  - UMCC
- 1.37 mm coaxial cable

#### APPLICATIONS

- LPWA
  - LoRaWAN®, Sigfox®
  - WiFi HaLow™ (802.11ah)
- Cellular IoT - LTE-M (Cat-M1), NB-IoT
- Cellular - 5G/4G LTE/3G/2G
- PC, LAN
- ISM - Bluetooth®, ZigBee®
- GNSS - GPS, Galileo, GLONASS, BeiDou, QZSS
- Automotive, Industrial, Commercial, Enterprise

#### TABLE 1. ELECTRICAL SPECIFICATIONS

Parameter	Value
Insertion Loss (dB max)	1.0
VSWR (max)	1.3
Impedance	50 Ω
Insulation Resistance	500 MΩ min.

#### ORDERING INFORMATION

Part Number	Description
CSG-UFFR-100-UFFR	U.FL/MHF1-type plug (female socket) to U.FL/MHF1-type plug (female socket) on 100 mm (3.9 in) of 1.37 mm coaxial cable

Available from Linx Technologies and select distributors and representatives.

## PRODUCT DIMENSIONS

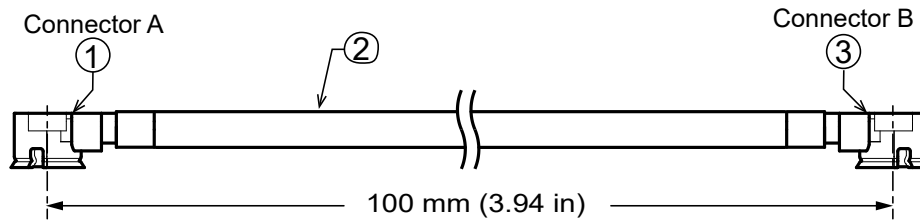


Figure 1. Product Dimensions for the CSG-UFFR-100-UFFR Cable Assembly

## TABLE 2. CABLE ASSEMBLY COMPONENTS

Item #	Description	Material	Finish
1	Connector, U.FL-type plug (female socket)	Brass	Gold
2	1.37 mm coaxial cable	1.37 mm coaxial	Black
3	Connector, U.FL-type plug (female socket)	Brass	Gold

## TABLE 3. CABLE ASSEMBLY MECHANICAL SPECIFICATIONS

Parameter	Connector A U.FL-type plug (female socket)	Connector B U.FL-type plug (female socket)
Fastening Type	Snap-on coupling	Snap-on coupling
Connector Durability	30 cycles min.	30 cycles min.
Weight	0.6 g (0.21 oz)	

## COAXIAL CABLE SPECIFICATIONS

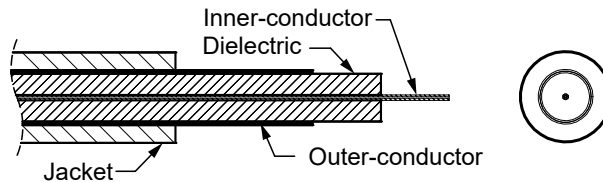


Figure 2. Coaxial Cable Cutaway Diagram

## TABLE 4. COAXIAL CABLE MATERIAL SPECIFICATIONS FOR 1.37 MM CABLE

1.37 mm Coax	Material	Dimensions
Inner-Conductor	Silver plated copper, 7 strand, 32 AWG	Ø0.306 mm (0.012 in)
Dielectric	FEP, clear	Ø0.90 mm (0.035 in)
Outer-Conductor	Silver plated copper braid, coverage 90%	Ø1.13 mm (0.044 in)
Jacket	FEP, black	Ø1.37 mm (0.054 in) ±0.05 mm

**TABLE 5. COAXIAL CABLE ELECTRICAL AND PHYSICAL SPECIFICATIONS FOR 1.37 MM CABLE**

Parameter	Value					
Rated Temp Voltage	200 °C					
Spark Test	2.5 kV					
Insulation	Unaged	Tensile Strength		2500 psi min. (1.76 kg/mm <sup>2</sup> )		
		Elongation		200% min.		
	Aged	Tensile Strength		Unaged min. 75% (168 hrs x 232 °C)		
		Elongation		Unaged min. 75% (168 hrs x 232 °C)		
Jacket	Unaged	Tensile Strength		2500 psi min. (1.76 kg/mm <sup>2</sup> )		
		Elongation		200% min.		
	Aged	Tensile Strength		Unaged min. 75% (168 hrs x 232 °C)		
		Elongation		Unaged min. 75% (168 hrs x 232 °C)		
Nominal Impedance	50 ± 3 Ω					
Nominal Capacitance	96 ± 3 pF/m					
Nominal Velocity of Propagation	70%					
VSWR (0 to 6 GHz)	≤ 1.3					
Flame Test	VW-1 OK					
Attenuation (dB/1M)	1.0 GHz ≤ 1.7	2.0 GHz ≤ 2.5	3.0 GHz ≤ 3.0	4.0 GHz ≤ 3.5	5.0 GHz ≤ 4.0	6.0 GHz ≤ 4.5
Minimum Inside Bend radius	5.5 mm (0.22 in)					

## INSERTION LOSS

Figure 3 shows the Insertion Loss for the CSG-UFFR-100-UFFR cable assemblies. Insertion loss is the loss of signal power (gain) resulting from the insertion of a device in a transmission line.

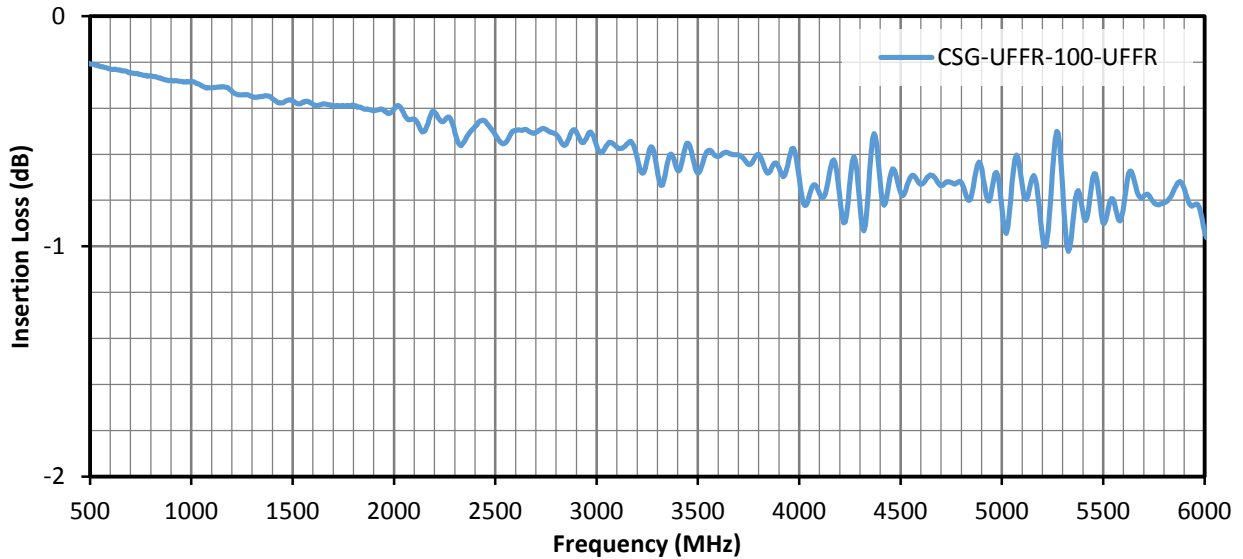


Figure 3. Insertion Loss for the CSG-UFFR-100-UFFR Cable Assemblies

## VSWR

Figure 4 provides the voltage standing wave ratio (VSWR) across the cable assembly's bandwidth for the CSG-UFFR-100-UFFR cable assemblies. VSWR describes how efficiently power is transmitted through the cable assembly. A lower VSWR value indicates better performance at a given frequency.

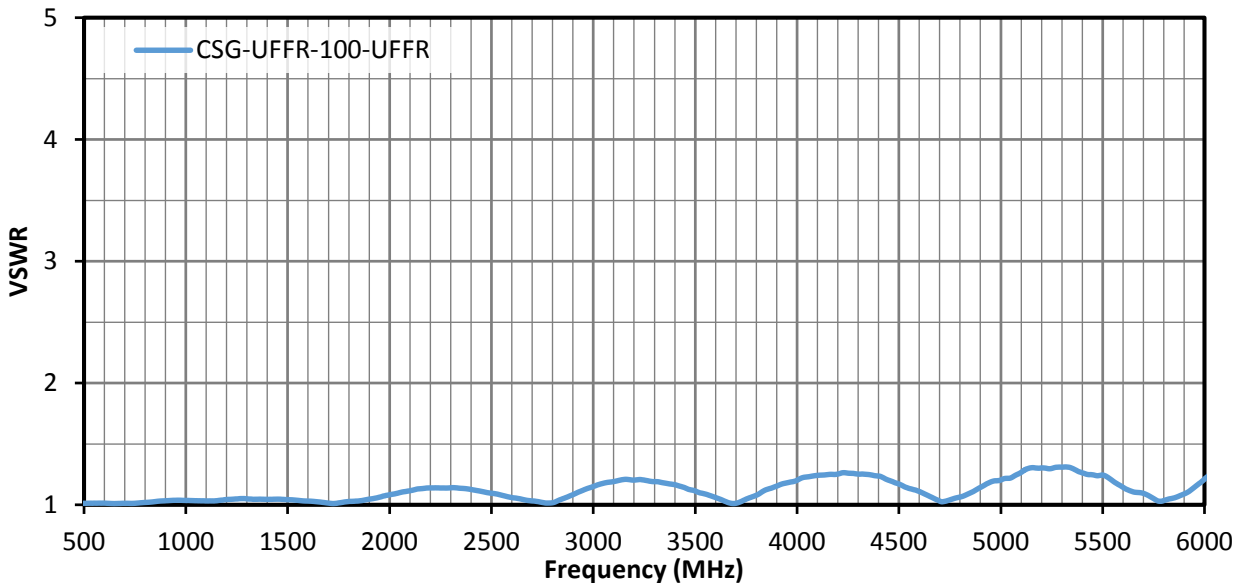


Figure 4. VSWR for the CSG-UFFR-100-UFFR Cable Assemblies

## PACKAGING INFORMATION

The CSG-UFFR-100-UFFR cable assembly is packaged in a clear plastic bag, in quantities of 100. Distribution channels may offer alternative packaging options.

---

## CABLE ASSEMBLY DEFINITIONS AND USEFUL FORMULAS

**VSWR** - Voltage Standing Wave Ratio. VSWR is a unitless ratio that describes how efficiently power is transmitted through the cable assembly. A lower VSWR value indicates better performance at a given frequency. VSWR is easily derived from Return Loss.

$$VSWR = \frac{10^{\left[\frac{\text{Return Loss}}{20}\right]} + 1}{10^{\left[\frac{\text{Return Loss}}{20}\right]} - 1}$$

**Insertion Loss** - The loss of signal power (gain) resulting from the insertion of a device in a transmission line. Insertion loss can be derived from the power transmitted to the load before the insertion of the component  $P_T$  and the power transmitted to the load after the insertion of the component  $P_R$ .

$$\text{Insertion Loss (dB)} = 10 \log_{10} \frac{P_T}{P_R}$$

### TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

### te.com

TE Connectivity, TE, TE connectivity (logo), Linx and Linx Technologies are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

10/22 Original

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Cable Assemblies](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[6772459-7](#) [73419-4660](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [145111-05-12.00](#) [1655303-1](#) [1661-C-24](#) [1801171170914KE](#) [1905715](#)  
[24P104C24J1-012](#) [24P204C24J1-003](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [24P103C24P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#)  
[R288940003](#) [R288940034](#) [4814-BB-24](#) [5260-72](#) [4814-K-48](#) [115101-09-06.00](#) [MXHT83QE3000](#) [73-6351-25](#) [81-6201-1600](#)  
[1800920920610PJ](#) [GD0BQ0BQ024.0](#) [R288940002](#) [PT82NSMA](#) [BNC TO SMA Cable](#) [PT815NN](#) [MF53/1x8A\\_21MXP/11SK/305](#)  
[2001481480914ZT](#) [32026-29094-29094-36TC](#) [89761-3417](#) [PT89TT](#) [PT8X2NT](#) [0HR01R020360](#) [G2R01R010240](#) [0K0CJ0CQ0240](#)  
[GD0BPZ3G0120](#) [0D0CP0CQ0720](#) [0SR01R010120](#) [0Z0CK0CQ0120](#) [0SQ01Q010480](#) [2001481481219ZT](#) [R284C0351020](#)