

CABLE BREAKOUT BOOTS, THREE ENTRY

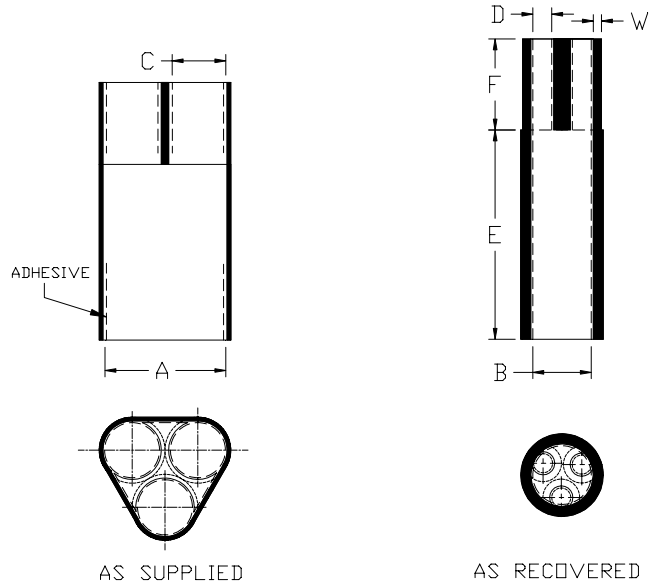


Table of Dimensions, inch (mm):

PART NUMBER (See Note*)	BODY ID		LEG ID		Length Recovered Min		Rec'd. Wall Thickness Ref (W)
	Exp. (A), Min	Rec'd. (B), Max	Exp. (C), Min	Rec'd. (D), Max	(E), Body	(F), Leg	
T3-9FR	0.90 (23)	0.36 (9)	0.33 (8)	0.12 (3)	2.0 (51)	0.7 (18)	0.04 (1.0)
T14-23FR	1.20 (30)	0.69 (18)	0.50 (13)	0.18 (5)	2.3 (58)	1.0 (25)	0.09 (2.3)
T23-50FR	1.20 (30)	0.69 (18)	0.50 (13)	0.18 (5)	2.3 (58)	1.0 (25)	0.09 (2.3)
T42-100FR	1.70 (43)	0.90 (23)	0.82 (21)	0.30 (8)	2.3 (58)	1.2 (30)	0.12 (3.0)
T60-150FR	1.70 (43)	0.90 (23)	0.82 (21)	0.30 (8)	2.3 (58)	1.2 (30)	0.12 (3.0)
T150-300FR	2.40 (61)	1.40 (36)	1.25 (32)	0.50 (13)	3.5 (89)	1.6 (41)	0.12 (3.0)
T200-400FR	2.40 (61)	1.40 (36)	1.25 (32)	0.50 (13)	3.5 (89)	1.6 (41)	0.12 (3.0)
T-400FR	3.20 (81)	2.00 (51)	1.40 (36)	0.75 (19)	3.5 (89)	1.6 (41)	0.14 (3.6)
T500-600FR	4.90 (124)	2.32 (59)	2.00 (51)	1.00 (25)	7.5 (191)	2.2 (56)	0.12 (3.0)

Note*: Add "NA" to the end of Part Number if no adhesive is required

Material: Heat shrinkable boot material in accordance with -3 polyolefin

Factory applied sealant: Factory applied hot melt adhesive is standard.

CUSTOMER DRAWING

	Raychem Molded Parts 305 Constitution Drive, Menlo Park, CA 94025			TITLE: <h3 style="text-align: center;">CABLE BREAKOUT BOOT, THREE ENTRY</h3>			
	Unless otherwise specified dimensions are in inches. [Metric dimensions are shown in brackets]				DOCUMENT NO.: <h3 style="text-align: center;">TXXX-XXXFR</h3>		
Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.				REV: G			
				SCALE: None		DATE: August 27, 2009	
REVISED BY: UNGUYEN	CAGE CODE: 06090	Org. Date: 5/7/07	ECO #: 09-019755	FILE: TXXX-XXXFR.doc	SIZE A	SHEET: 1 of 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[D38999/24FJ4AN](#) [570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [358838-000](#) [CB-1022B-78](#)
[RM707012](#) [RP410012](#) [MMS42](#) [1-640426-8](#) [2EDL4CM](#) [DTS20W19-11PD-3028-LC](#) [RM202615](#) [NC6-P104-06](#) [MSPS103B](#) [DTS26F21-](#)
[41HE-LC](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [30DCB6](#) [1932144-1](#) [293545-4](#) [LVR125S](#) [MS27466T25F4PB](#)
[CKB-38-78010](#) [TR04AI-TINELLOCKRING](#) [1206SFF150F/63-2](#) [D38999/20JB35HA](#) [TE1500A2R2J](#) [D38999/20WC8BB](#) [DTS24F19-11SC-](#)
[3028-LC](#) [D38999/24WG11HA](#) [D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [MS27467T21F35J](#) [MS27467T21F11J](#)
[MS27467T21F16H-LC](#) [MS27467T21F35H](#) [MS27467T21F41H-LC](#) [1206SFH150F/24-2](#) [RP330024](#) [DJT16E21-11PA-LC](#) [DJT16E21-11HA-](#)
[LC](#) [DJT16E21-11AA](#) [MS27467T21B11JA](#) [DJT16E21-11JA](#) [MS27467T21B11JA-LC](#)