


Terminal Strips

- Heavy-duty, corrosion-resistant screws, surface plates and optional hardware
- Accessory hardware provides a variety of termination options
- Available cover helps prevent contact with live terminals
- Rugged polyester thermoplastic base (UL Rated 94V-0)
- Operating temperature rated from 130°C (260°F) to -40°C (-40°F)
- UL Recognized (E62622) and CSA Certified (LR15364)

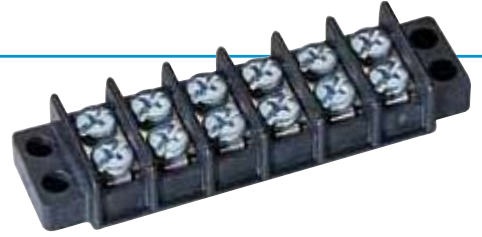

Terminal Strips

No. of Poles	Center Spacing	Wire Range (AWG Cu)	Recommended Torque	Terminal Screw Size	Cat. No.
89-200 Series, 30A/600V UL/CSA (Max. electrical rating 30A/250V when used with optional quick connects)					
2	.562 in. (14.28mm)	22 – 10	16 in. - lb.	#8-32 Philslot Zinc-Plated Steel	89-202
3					89-203
4					89-204
6					89-206
8					89-208
10					89-210
12					89-212
89-300 Series, 300V/30A UL/CSA (Max. electrical rating 15A/125V when used with optional quick connects)					
2	.375 in. (9.52mm)	22 – 14	9 in. - lb.	#6-32 Philslot Zinc-Plated Steel	89-302
4					89-304
6					89-306
8					89-308
10					89-310
12					
89-400 Series, 30A/300V UL/CSA					
2	.437 in. (11.10mm)	22 – 12	9 in. - lb.	#6-32 Philslot Zinc-Plated Steel	89-402
4					89-404
6					89-406
8					89-408
10					89-410
12					

No. of Poles	Center Spacing	Wire Range (AWG Cu)	Recommended Torque	Terminal Screw Size	Standard Black Cat. No.	Shorting Block Cat. No.
89-500 Series, 60A/600V UL/CSA (Max. electrical rating 60A/600V achieved only when used with #6 AWG copper wire crimped to ring terminal)						
4	.625 in. (15.88mm)	22 – 6	20 in. - lb.	#10-32 Slotted Nickle-Plated Brass	89-504	89-505
6					89-506	89-507
8					89-508	89-509
12					89-512	89-513



Covers

- Helps prevent contact with live terminals



No. of Circuits	For Use with			
	89-200 Clear Cat. No.	89-300 Clear Cat. No.	89-400 Clear Cat. No.	89-500 Clear Cat. No.
2	89-233	89-334	89-434	—
3	89-234	—	—	—
4	89-235	89-335	89-435	89-514
6	89-236	89-336	89-436	89-516
8	89-237	89-337	89-437	89-518
10	89-238	89-338	89-438	—
12	89-239	89-339	89-439	89-520

Quick Connects


- Allows fast, flexible circuit changes



For Use with				
Terminal Strip Series	Tab Size (Inches)	Quantity	Flat -None Cat. No.	Flat - Flat Cat. No.
89-300	.187 x .020	10	89-314	89-317
89-200 & 89-400	.250 x .031	10	89-414	89-417

Barrier Strips


- Recessed screws and tubular contacts provide added safety and help prevent short circuits
- Tubular contacts connect stripped, un-terminated solid or stranded wire directly to each contact
- Integrated wire protectors prevent twisting and breakage of stranded wire during connection
- Modular 12-circuit design can be cut into smaller sections, or stacked end-to-end
- Rugged nylon construction, UL 94V2
- Operating temperature rated to 105°C (221°F)

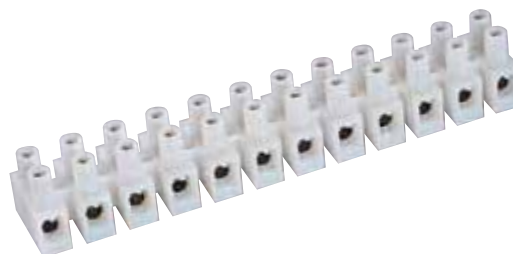

Electrical Ratings	Wire Range (AWG)	No. of Circuits	Torque in. - lb.	Model No.	Cat. No.
20A/300V UL	22 - 12	12	3.5	PA8DS	89-608
10A/400V CSA	20 - 18				
30A/300V UL	22 - 10	12	4.4	PA10DS	89-610
20A/400V CSA	18 - 14				
35A/300V UL/CUL	22 - 10	12	7.0	PA12DS	89-612
50A/300V UL/CUL	20 - 8	12	12.0	PA14DS	89-614

Jumpers

- Provides easy connection of multiple circuits

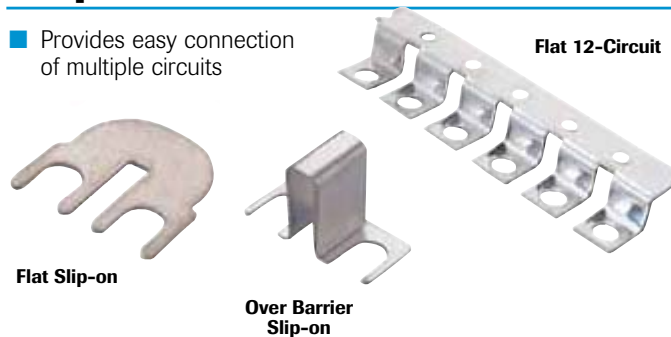

For Use with		Quantity	Flat Slip-on Cat. No.	Over Barrier Slip-on Cat. No.	Flat 12-Circuit Cat. No.
Terminal Strip Series	Center Spacing (Inches)				
89-200	.562	10	89-229	89-224	—
		100	89-230	—	—
89-300	.375	10	89-323	89-324	—
		100	89-330	—	—
89-400	.437	10	89-423	89-424	—
		100	89-430	—	—
89-500	.625	2	—	—	89-525

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ideal manufacturer](#):

Other Similar products are found below :

[74-027](#) [45-292](#) [45-098](#) [L-5361](#) [45-093](#) [45-177](#) [45-1987-1](#) [41-990](#) [25HK-AY-090A266-DH](#) [45-415](#) [45-418](#) [30-503](#) [35-020](#) [35-060](#) [35-516](#)
[45-1633-1](#) [45-170](#) [45-1773-1](#) [45-1774](#) [45-1939-1](#) [45-2133-1](#) [45-298](#) [45-372](#) [K-6336](#) [K-8906R](#) [L-4866](#) [L-5210](#) [L-5562](#) [L-9038](#) [LB-1091](#)
[35-522](#) [61-775](#) [KB-0276R](#) [30-429](#) [33-856](#) [45-672](#) [45-171](#) [34-015](#) [33-864](#) [30-506](#) [25HK-AP-060A100-CP-3A](#) [15DYS624-240125W-K](#)
[15DYS602-120500W](#) [15DYS6150-4800312P](#) [33-704](#) [45-092](#) [45-121](#) [45-1513](#) [45-2020-1](#) [45-2565](#)