

CMF05

High-Speed Rectifier Applications (Fast Recovery)
 Switching Mode Power Supply Applications
 DC-DC Converter Applications

- Repetitive peak reverse voltage: $V_{RRM} = 1000 \text{ V}$
- Average forward current: $I_F (AV) = 0.5 \text{ A}$
- Forward voltage: $V_{FM} = 2.7 \text{ V (max)}$
- Very fast reverse-recovery time: $t_{rr} = 100 \text{ ns (max)}$
- Suitable for compact assembly due to the use of a small surface-mount package “M-FLAT™” (Toshiba package name)


Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Characteristic	Symbol	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}	1000	V
Average forward current	$I_F (AV)$	0.5 (Note 1)	A
Peak one-cycle surge forward current (non-repetitive)	I_{FSM}	10 (50 Hz)	A
Junction temperature	T_j	-40 to 125	$^\circ\text{C}$
Storage temperature range	T_{stg}	-40 to 150	$^\circ\text{C}$

Note 1: $T_l = 92^\circ\text{C}$
 Rectangular waveform ($\alpha = 180^\circ$)

Note 2: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.
 Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook (“Handling Precautions”/ “Derating Concept and Methods”) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Unit: mm

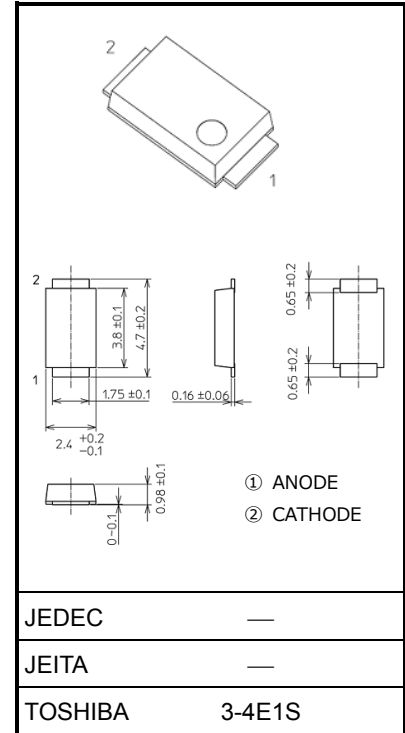

Weight: 0.023 g (typ.)

Start of commercial production
 2007-07


Electrical Characteristics (Ta = 25°C)

Characteristic	Symbol	Test Condition	Min	Typ.	Max	Unit
Peak forward voltage	V_{FM}	$I_{FM} = 0.5 \text{ A}$ (pulse test)	—	—	2.7	V
Repetitive peak reverse current	I_{RRM}	$V_{RRM} = 800 \text{ V}$ (pulse test)	—	—	50	μA
Reverse recovery time	t_{rr}	$I_F = 1 \text{ A}$, $di/dt = -30 \text{ A}/\mu\text{s}$	—	—	100	ns
Forward recovery time	t_{fr}	$I_F = 1 \text{ A}$	—	550	—	ns
Thermal resistance	$R_{th(j-a)}$	Device mounted on a ceramic board (board size: 50 mm × 50 mm) (soldering land: 2 mm × 2 mm) (board thickness: 0.64 mm)	—	—	60	$^{\circ}\text{C}/\text{W}$
		Device mounted on a glass-epoxy board (board size: 50 mm × 50 mm) (soldering land: 6 mm × 6 mm) (board thickness: 1.6 mm)	—	—	135	
		Device mounted on a glass-epoxy board (board size: 50 mm × 50 mm) (soldering land: 2.1 mm × 1.4 mm) (board thickness: 1.6 mm)	—	—	210	
Thermal resistance (junction to lead)	$R_{th(j-l)}$	—	—	—	16	$^{\circ}\text{C}/\text{W}$

Marking

Abbreviation Code	Part No.
F5	CMF05

Standard Soldering Pad

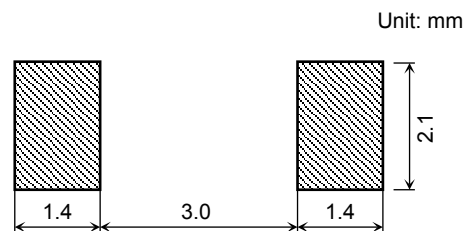

Handling Precautions

- 1) The absolute maximum ratings of a semiconductor device are a set of ratings that must not be exceeded, even for a moment. Do not exceed any of these ratings.

The following are the general derating methods we recommend for designing a circuit using this device.

V_{RRM} : We recommend that the worst-case voltage, including surge voltage, be no greater than 80% of the absolute maximum rating of V_{RRM} for a DC circuit; and no greater than 50% of that of V_{RRM} for an AC circuit.

V_{RRM} has a temperature coefficient (0.1%/°C). Be sure to take this temperature coefficient into account when designing a device for use at low temperature.

$I_{F(AV)}$: We recommend that the worst case current be no greater than 80% of the absolute maximum rating of $I_{F(AV)}$. Carry out sufficient heat design. If it is not possible to design a circuit with excellent heat radiation, set a margin by using an allowable T_a max- $I_{F(AV)}$ curve.

I_{FSM} : This rating specifies the non-repetitive peak current. This is only applied for an abnormal operation, which seldom occurs during the lifespan of the device.

T_j : Derate this rating when using a device in order to ensure high reliability. We recommend that the device be used at a T_j of below 100°C.

- 2) Thermal resistance between junction and ambient fluctuates depending on the mounting condition of the device. When using the device, be sure to design the circuit board and soldering land size to match the appropriate thermal resistance value.

Refer to the Rectifier databook for further information.

3) Moisture-Proof Packing

The CMF05 is packed in a moisture-proof laminated aluminum bag.

Precautions for Transportation and Storage

- (1) Avoid excessive vibration during transportation.
- (2) Do not toss or drop the packed devices to avoid ripping of the bag.
- (3) After opening the moisture-proof bag, the devices should be stored at a temperature of 5°C to 30°C and at an RH of 70% or below. The devices should be assembled within the defined period.


Reflow Soldering Conditions:

First reflow soldering:	Within 120 hours after opening the moisture-proof bag
Second reflow soldering:	Within 72 hours after the first reflow soldering
Third reflow soldering:	Within 72 hours after the second reflow soldering

Flow Soldering Conditions:

Perform flow soldering within 120 hours after opening the moisture-proof bag. Flow soldering is permitted at most once.
Preheat the devices for 60 to 120 seconds at a temperature of 150°C.

- (4) The moisture-proof bag may be stored unopened for up to 12 months at 5°C to 30°C at an RH of 90% or below. If, upon opening the bag, the moisture indicator card shows humidity of 30% or above (the color of the 30% dot has changed from blue to pink) or the expiration date has passed, the devices should be baked as follows:
Baking conditions: 60°C ± 5°C for 24 to 36 hours. Perform baking at most once.
Repeated baking can cause the peeling strength of the tape to change and lead to an assembly problem. Furthermore, countermeasures against static electricity should be taken during baking.



The humidity indicator shows an approximate ambient humidity at 25°C.
If the ambient humidity is below 10%, the color of all the indicator dots is blue.
If, upon opening the bag, the color of the 30% dot has changed from blue to pink, the devices should be baked before assembly.

4) Mounting Method

·Using Infrared Reflow

- (1) Heating the top and bottom with long or medium infrared rays is recommended (see Figure 1).

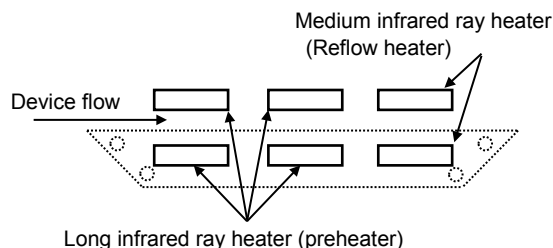


Figure 1 Heating the top and bottom with long or medium infrared rays

- (2) Complete the infrared ray reflow process within 30 to 50 seconds when a package surface temperature is 230°C or higher. The maximum package surface temperature should be kept below 260°C.

(3) Figure 2 shows an example of temperature profile.

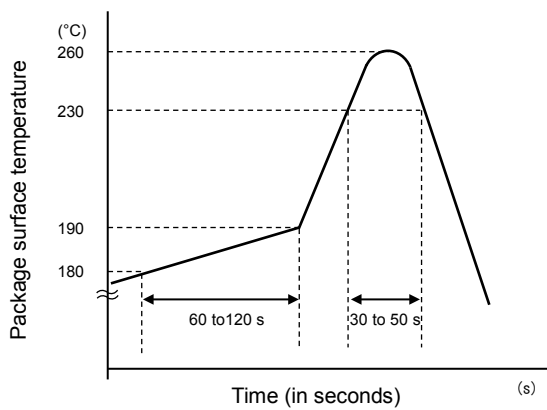


Figure 2 Example of Temperature Profile

This profile is based on the device's maximum guaranteed heat resistance.

Optimize the preheat and heating temperatures according to the type of solder paste used. The above profile should be not exceeded.

(4) Using Hot Air Reflow Soldering







(1) Complete hot air reflow process within 30 to 50 seconds when a package surface temperature is 230°C or higher. The maximum package surface temperature should be kept below 260°C.

(2) Figure 2 shows an example of temperature profile.

(5) Using Flow or Dip Soldering

(1) Preheat the devices for 60 to 120 seconds at a temperature of 150°C.

(2) Complete soldering within ten seconds below 260°C. Flow or dip soldering is permitted at most once.

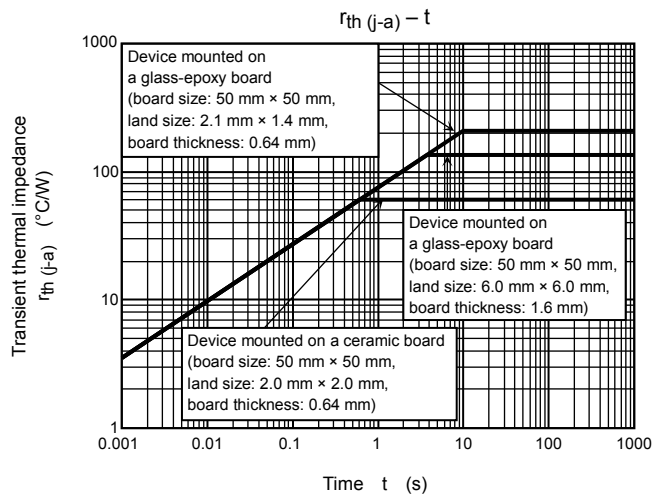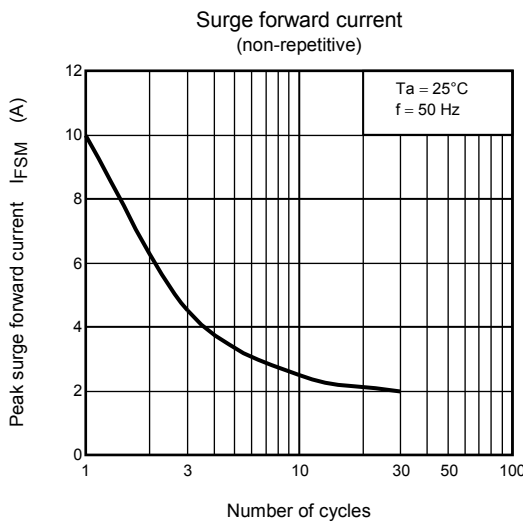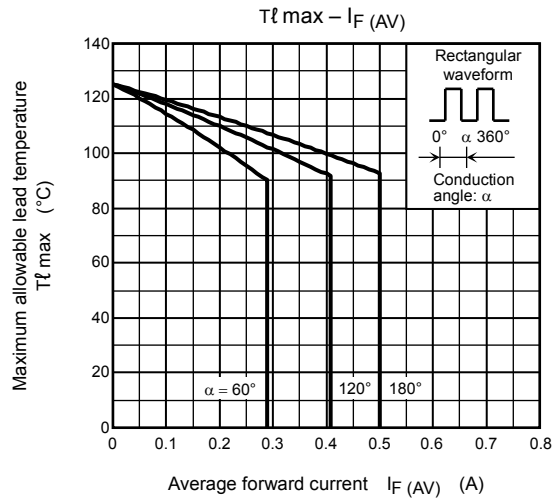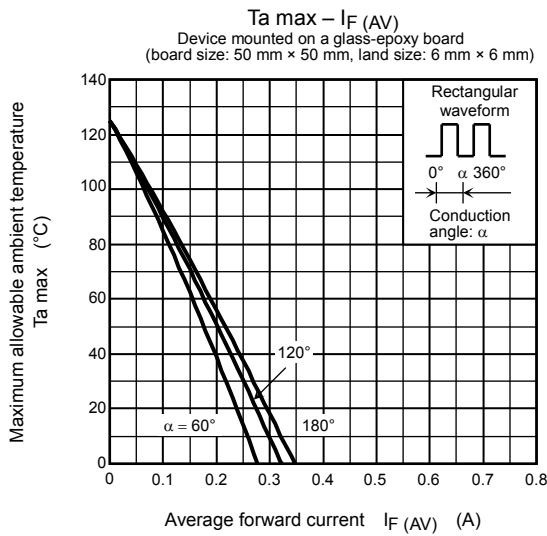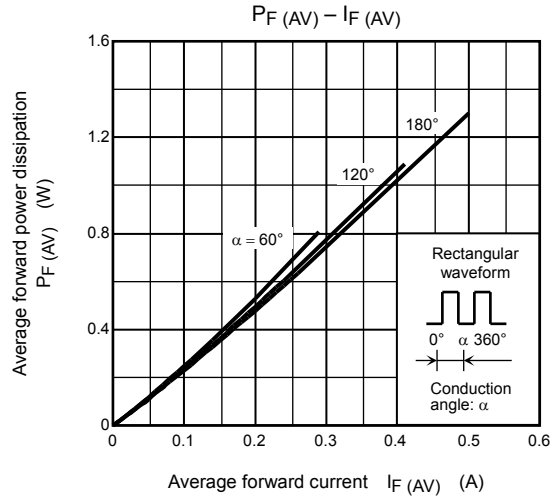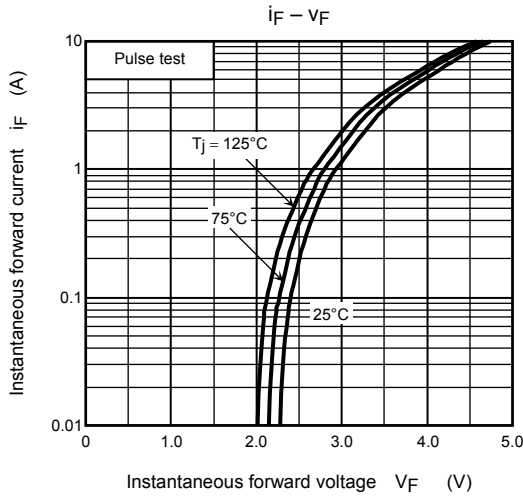

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [Toshiba](#) manufacturer:

Other Similar products are found below :

[D91A](#) [DA24F4100L](#) [DD89N1600K-A](#) [DD89N16K-K](#) [RL252-TP](#) [DLA11C-TR-E](#) [DSA17G](#) [DSEI2X30-06C](#) [1N4005-TR](#) [BAV199-TP](#)
[UFS120Je3/TR13](#) [JANS1N6640US](#) [VS-80-1293](#) [DD89N16K](#) [DD89N16K-A](#) [481235F](#) [DSP10G-TR-E](#) [067907F](#) [MS306](#) [ND104N08K](#)
[SPA2003-B-D-A01](#) [VS-80-6193](#) [VS-66-9903](#) [VGF0136AB](#) [US2JFL-TP](#) [UFS105Je3/TR13](#) [A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#)
[RF301B2STL](#) [RF501B2STL](#) [UES1306](#) [UES1302](#) [BAV199E6433HTMA1](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [JANTXV1N5660A](#) [UES1106](#)
[GS2K-LTP](#) [D126A45C](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [STTH20P035FP](#) [VS-8EWS12S-M3](#) [VS-](#)
[12FL100S10](#) [ACGRA4001-HF](#)