

Geared dc instrument motor

1271 series


The 1271 geared instrument dc motor is ideally suited to a wide range of applications requiring a combination of low speed operation and small unit size. The integral iron core dc motor provides smooth operation and a bi-directional variable speed capability while the gearhead utilises a multi-stage metal spur gear train rated for a working torque up to 0.2 Nm.

The unit, which is suitable for mounting in any attitude, provides reliable operation over a wide ambient temperature range and is equipped with an integral VDR (voltage dependant resistor) electrical suppression system to minimise electrical interference.

The 1271 unit offers a range of gear ratio options for operating speeds from 5- 200 rpm and is ideally suited to applications where small size and low unit price are important design criteria.



Dimensions: mm

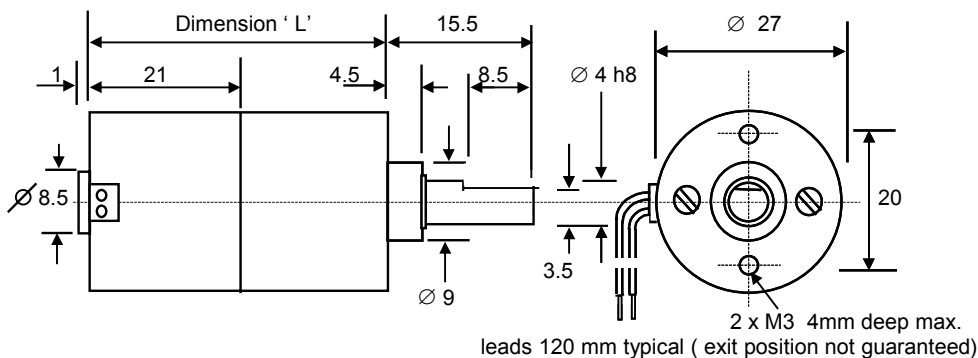

Specification

| Order Code | Length 'L' (mm) | Gear ratio | Nominal Voltage (Vdc) | No-Load speed (rpm) | Rated Speed (rpm) | Rated Torque (Ncm) | Rated Current (mA) | Mass (grams) |
|-------------|-----------------|------------|-----------------------|---------------------|-------------------|--------------------|--------------------|--------------|
| 1271-06- 10 | 36 | 10:1 | 6 | 215 | 120 | 1.5 | 85 | 55 |
| 1271-12- 10 | 36 | 10:1 | 12 | 255 | 165 | 1.5 | 50 | 55 |
| 1271-06- 21 | 36 | 21:1 | 6 | 105 | 60 | 2.5 | 85 | 55 |
| 1271-12- 21 | 36 | 21:1 | 12 | 125 | 80 | 2.5 | 50 | 55 |
| 1271-06- 43 | 41 | 43:1 | 6 | 52 | 32 | 3.8 | 85 | 57 |
| 1271-12- 43 | 41 | 43:1 | 12 | 60 | 40 | 3.8 | 50 | 57 |
| 1271-06- 90 | 41 | 90:1 | 6 | 25 | 13 | 8.0 | 85 | 58 |
| 1271-12- 90 | 41 | 90:1 | 12 | 30 | 18 | 8.0 | 50 | 58 |
| 1271-06-188 | 46 | 188:1 | 6 | 12 | 7 | 14.0 | 85 | 59 |
| 1271-12-188 | 46 | 188:1 | 12 | 14 | 9 | 14.0 | 50 | 59 |
| 1271-06-392 | 46 | 392:1 | 6 | 6 | 4 | 20.0 | 75 | 60 |
| 1271-12-392 | 46 | 392:1 | 12 | 7 | 5 | 20.0 | 45 | 60 |

Max No Load Current: 6 volt types: 30 mA
12 volt types: 20 mA

Max Radial shaft load : 10N

Max Axial shaft load : 5 N

Ambient temperature range: -20 to +60 deg.C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [mclennan](#) manufacturer:

Other Similar products are found below :

[1271-12-188](#) [M66CE-24](#) [MSE570 EVO 2](#) [1308-24-510](#)