


Category 5 Cable

Cat 5E - FTP

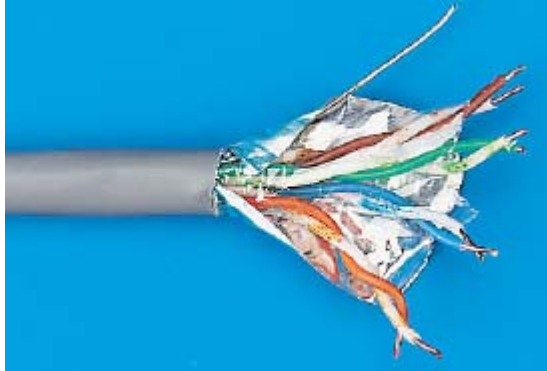

Features:

- Four twisted pairs of 24 AWG plain copper conductors
- Foil screened
- Grey PVC sheath
- Meets the Category 5 electrical parameters defined in ISO11801 and TIA/EIA568

Mechanical Data

Inner Conductor	: 0.52 mm plain copper
Insulation	: 1.02 mm foamed polyethylene
Screen (s) tinned	: Overall aluminium / polyester tape, longitudinally applied, aluminium side, in with a 0.4 mm copper drain wire applied under the screen
Construction	: 4 twisted pairs cabled together and wrapped with polyester tape Colour code: Pair 1 BE-WE / BE Pair 2 OE-WE / OE Pair 3 GN-WE / GN Pair 4 BN-WE / BN
Jacket	: PVC
Temperature Range	: -20°C to +70°C minimum bending radius 60 mm

Electrical Data

Capacitance (s)	: 46 pF / m
Inner Conductor (s)	: 94 Ω / km
Velocity Ratio	: 76%
Dielectric Strength at 50 Hz	: 1 (kV / 1 minute)

Attenuation

F (MHz)	dB / 100 m
1	2
4	3.9
8	5.6
10	6.3
16	8
20	9
31.25	11.3
62.5	16.5
100	21.3
120	23.6
130	24.65

Category 5 Cable

Cat 5E - FTP

pro-POWER

Near End Crosstalk

F (MHz)	dB
1	65
4	56
8	51
10	50
16	46.9
20	45.5
31.25	42.6
62.5	38.1
100	35
120	33.8
130	33.2

Specification Table

Impedance (Ω)	Resistance per Unit Length (Ω / km)	Overall Diameter	Part Number
100 \pm 15	98.6	6 \pm 0.3	CBBR6332

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk

pro-POWER

X-ON Electronics

Authorized Distributor

Click to view similar products for [Pro Power manufacturer](#).

Other Similar products are found below :

[0301CV100W](#) [04JSBLACK](#) [06JSBLACK](#) [08450046010](#) [08450056010](#) [08450066010](#)
[08450166010](#) [08450236010](#) [08450256010](#) [08JSBLACK](#) [10026B](#) [10026BK](#) [10026G](#)
[10026R](#) [10026TB](#) [10026TBK](#) [10026TG](#) [10026TR](#) [10026TW](#) [10026W](#) [10030B](#)
[10030BK](#) [10030G](#) [10030O](#) [10030R](#)