


TLP124

Office Machine
 Programmable Controllers
 AC / DC-Input Module
 Telecommunication


The TOSHIBA mini flat coupler TLP124 is a small outline coupler, suitable for surface mount assembly. TLP124 consists of a photo transistor optically coupled to a gallium arsenide infrared emitting diode.

- Collector-emitter voltage: 80 V min.
- Current transfer ratio: 100% min.
 Rank BV: 200% min.
- Isolation voltage: 3750Vrms min.
- UL recognized: UL1577, file No. E67349

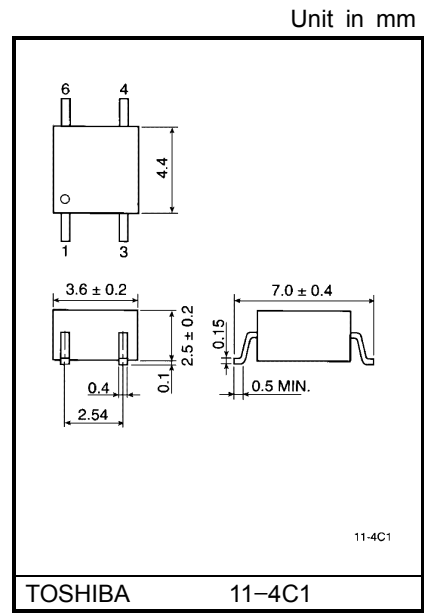

Weight: 0.09g

Pin Configurations (top view)



- 1 : Anode
- 3 : Cathode
- 4 : Emitter
- 6 : Collector

Current Transfer Ratio

| Classification | Current Transfer Ratio (min.) | | | Marking Of Classification |
|----------------|-------------------------------|--------------------------|------------------------|---------------------------|
| | Ta = 25°C | | Ta = -25~75°C | |
| | If = 1mA VCE = 0.5V | If = 0.5mA VCE = 1.5V | If = 1mA VCE = 0.5V | |
| Rank BV | 200% | 100% | 100% | BV |
| Standard | 100% | 50% | 50% | BV, Blank |

(Note) Application type name for certification test, please use standard product type name, i. e. TLP124 (BV): TLP124

Maximum Rations (Ta = 25°C)

| Characteristic | | Symbol | Rating | Unit |
|--|---|-------------------------------|------------------|---------|
| LED | Forward current | I_F | 50 | mA |
| | Forward current derating | $\Delta I_F / ^\circ\text{C}$ | -0.7 (Ta ≥ 53°C) | mA / °C |
| | Peak forward current (100µs pulse, 100pps) | I_{FP} | 1 | A |
| | Reverse voltage | V_R | 5 | V |
| | Junction temperature | T_j | 125 | °C |
| Detector | Collector-emitter voltage | V_{CEO} | 80 | V |
| | Emitter-collector valtage | V_{ECO} | 7 | V |
| | Collector current | I_C | 50 | mA |
| | Peak collector current (10ms pulse, 100pps) | I_{CP} | 100 | mA |
| | Power dissipation | P_C | 150 | mW |
| | Power dissipation derating (Ta ≥ 25°C) | $\Delta P_C / ^\circ\text{C}$ | -1.5 | mA / °C |
| | Junction temperature | T_j | 125 | °C |
| | Storage temperature range | T_{stg} | -55~125 | °C |
| Operating temperature range | T_{opr} | -55~100 | °C | |
| Lead soldering temperature (10s) | T_{sol} | 260 | °C | |
| Total package power dissipation | P_T | 200 | mW | |
| Total package power dissipation derating (Ta ≥ 25°C) | $\Delta P_T / ^\circ\text{C}$ | -2.0 | mW / °C | |
| Isolation voltage (AC, 1min., R.H. ≤ 60%) (Note 1) | BV_S | 3750 | Vrms | |

(Note 1) Device considered a two terminal device: Pins1, 3 shorted together and pins 4, 6 shorted together.

Recommended Operating Conditions

| Characteristic | Symbol | Min. | Typ. | Max. | Unit |
|-----------------------|-----------|------|------|------|------|
| Supply voltage | V_{CC} | — | 5 | 48 | V |
| Forward current | I_F | — | 1.6 | 20 | mA |
| Collector current | I_C | — | 1 | 10 | mA |
| Operating temperature | T_{opr} | -25 | — | 75 | °C |

Individual Electrical Characteristics (Ta = 25°C)

| Characteristic | | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|----------------------------------|-------------------------------------|----------------------------|---|------|------|------|------|
| LED | Forward voltage | V_F | $I_F = 10 \text{ mA}$ | 1.0 | 1.15 | 1.3 | V |
| | Reverse Current | I_R | $V_R = 5 \text{ V}$ | — | — | 10 | μA |
| | Capacitance | C_T | $V = 0, f = 1 \text{ MHz}$ | — | 30 | — | pF |
| Detector | Collector-emitter breakdown voltage | $V_{(BR)CEO}$ | $I_C = 0.5 \text{ mA}$ | 80 | — | — | V |
| | Emitter-collector breakdown voltage | $V_{(BR)ECO}$ | $I_E = 0.1 \text{ mA}$ | 7 | — | — | V |
| | Collector dark current | I_D | $V_{CE} = 48 \text{ V}$ | — | 10 | 100 | nA |
| | | | $V_{CE} = 48 \text{ V}, T_a = 85^\circ\text{C}$ | — | 2 | 50 | μA |
| Capacitance collector to emitter | C_{CE} | $V = 0, f = 1 \text{ MHz}$ | — | 12 | — | pF | |

Coupled Electrical Characteristics (Ta = 25°C)

| Characteristic | Symbol | Test Condition | Min. | Typ. | Max. | Unit | |
|--------------------------------------|--------------------------|---|---|------|------|------|-----|
| Current transfer ratio | I_C / I_F | $I_F = 1 \text{ mA}, V_{CE} = 0.5 \text{ V}$ Rank BV | 100 | — | 1200 | % | |
| | | | 200 | — | 1200 | | |
| Low input CTR | $I_C / I_F (\text{low})$ | $I_F = 0.5 \text{ mA}, V_{CE} = 1.5 \text{ V}$ Rank BV | 50 | — | — | % | |
| | | | 100 | — | — | | |
| Collector-emitter saturation voltage | $V_{CE} (\text{sat})$ | $I_C = 0.5 \text{ mA}, I_F = 1 \text{ mA}$ | — | — | 0.4 | V | |
| | | | $I_C = 1 \text{ mA}, I_F = 1 \text{ mA}$ Rank BV | — | 0.2 | | — |
| | | | | — | — | | 0.4 |
| Off-state collector current | $I_{C(\text{off})}$ | $V_F = 0.7 \text{ V}, V_{CE} = 48 \text{ V}$ | — | — | 10 | μA | |

Coupled Electrical Characteristics (Ta = -25~75°C)

| Characteristic | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|------------------------|--------------------------|---|------|------|------|------|
| Current transfer ratio | I_C / I_F | $I_F = 1 \text{ mA}, V_{CE} = 0.5 \text{ V}$ Rank BV | 50 | — | — | % |
| | | | 100 | — | — | |
| Low input CTR | $I_C / I_F (\text{low})$ | $I_F = 0.5 \text{ mA}, V_{CE} = 1.5 \text{ V}$ Rank BV | — | 50 | — | % |
| | | | — | 100 | — | |



Isolation Characteristics (Ta = 25°C)







| Characteristic | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|-------------------------------|-----------------|------------------------------------|--------------------|------------------|------|------------------|
| Capacitance (input to output) | C _S | V _S = 0, f = 1 MHz | — | 0.8 | — | pF |
| Isolation resistance | R _S | V _S = 500 V, R.H. ≤ 60% | 5×10 ¹⁰ | 10 ¹⁴ | — | Ω |
| Isolation voltage | BV _S | AC, 1 minute | 3750 | — | — | V _{rms} |
| | | AC, 1 s, in oil | — | 10000 | — | |
| | | DC, 1 minute, in oil | — | 10000 | — | V _{dc} |






Switching Characteristics (Ta = 25°C)




| Characteristic | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|----------------|------------------|---|------|------|------|------|
| Rise time | t _r | V _{CC} = 10 V, I _C = 2 mA R _L = 100Ω | — | 8 | — | μs |
| Fall time | t _f | | — | 8 | — | |
| Turn-on time | t _{ON} | | — | 10 | — | |
| Turn-off time | t _{OFF} | | — | 8 | — | |
| Turn-on time | t _{ON} | R _L = 4.7 kΩ V _{CC} = 5 V, I _F = 1.6 mA (Fig.1) | — | 10 | — | μs |
| Storage time | t _s | | — | 50 | — | |
| Turn-off time | t _{OFF} | | — | 300 | — | |

Fig. 1 Switching time test circuit

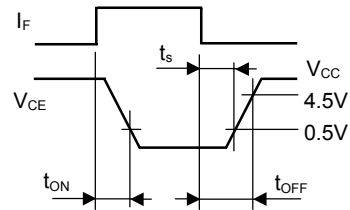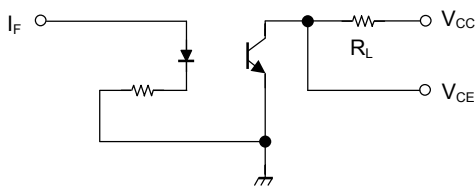

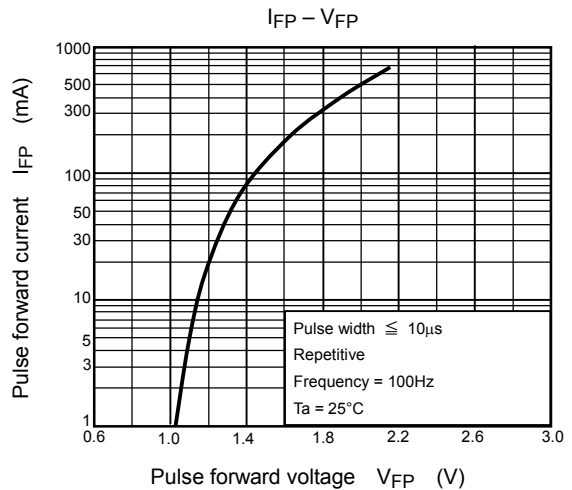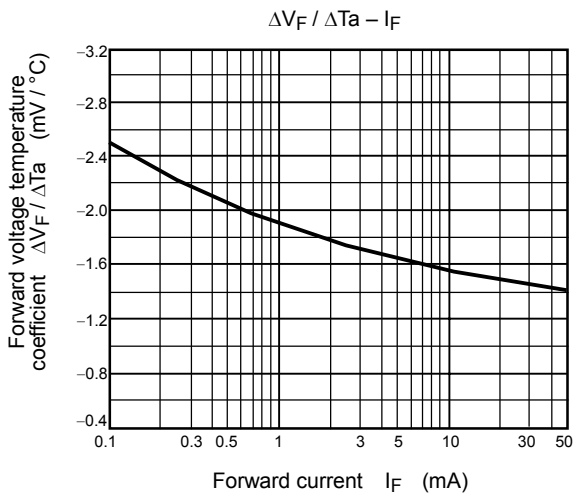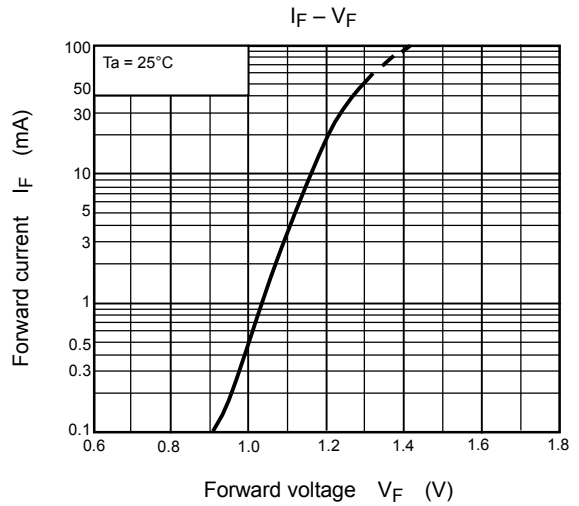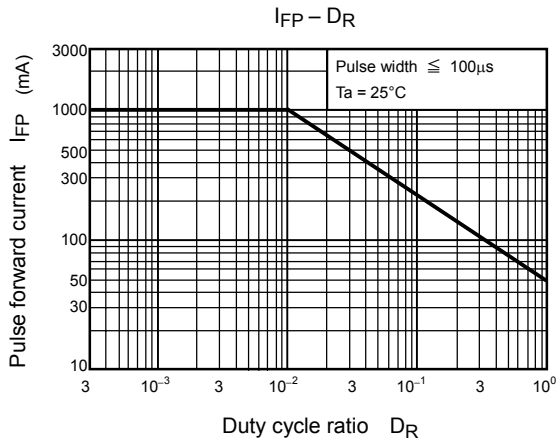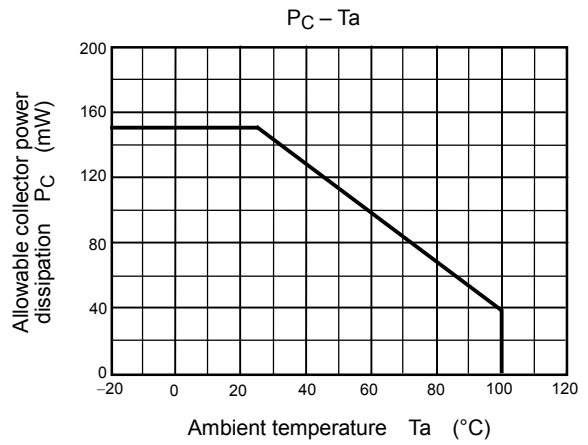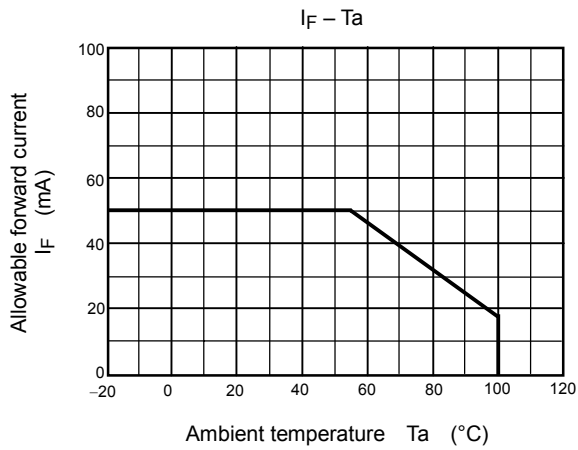

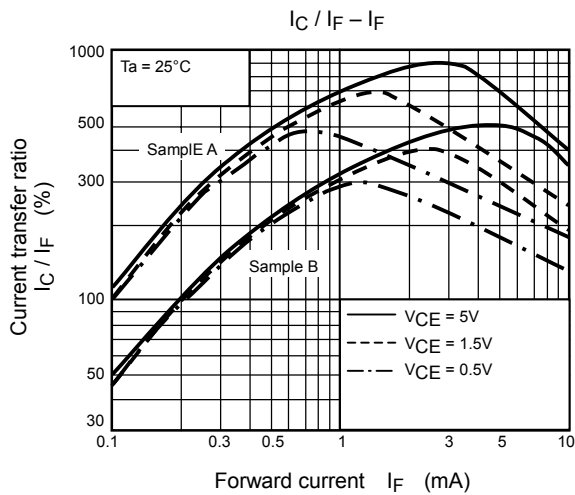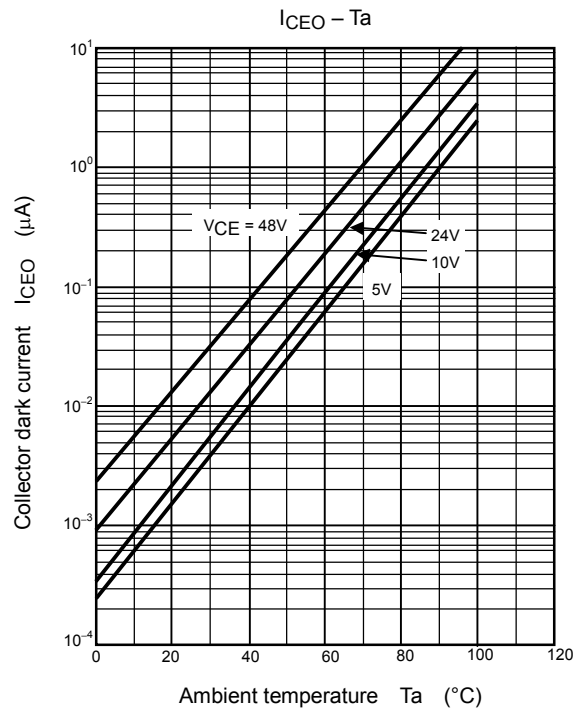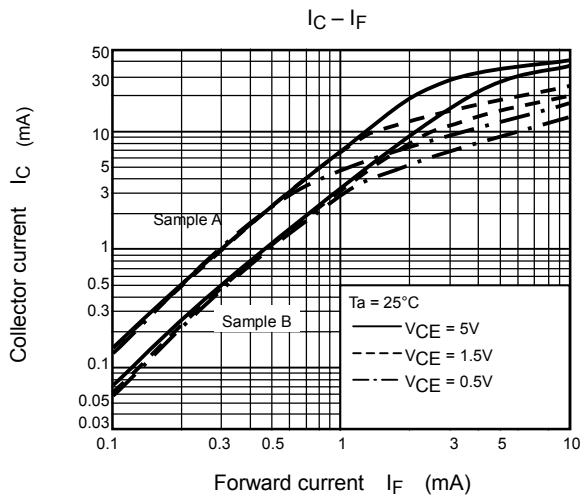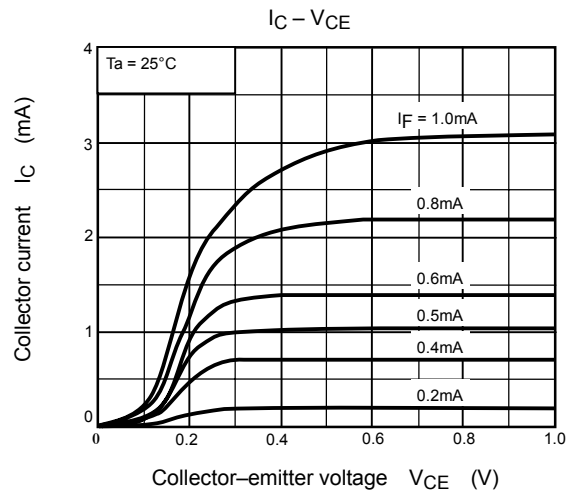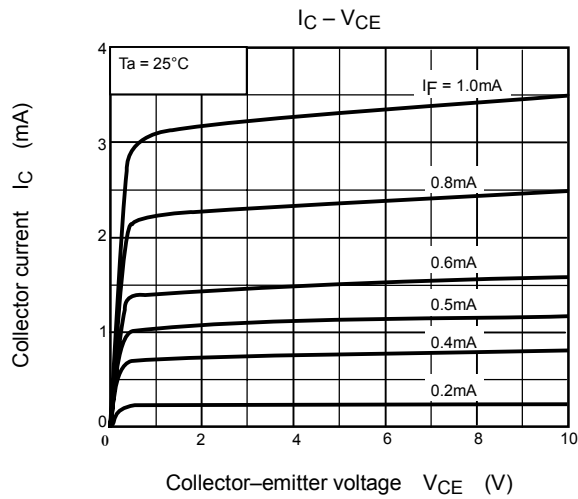

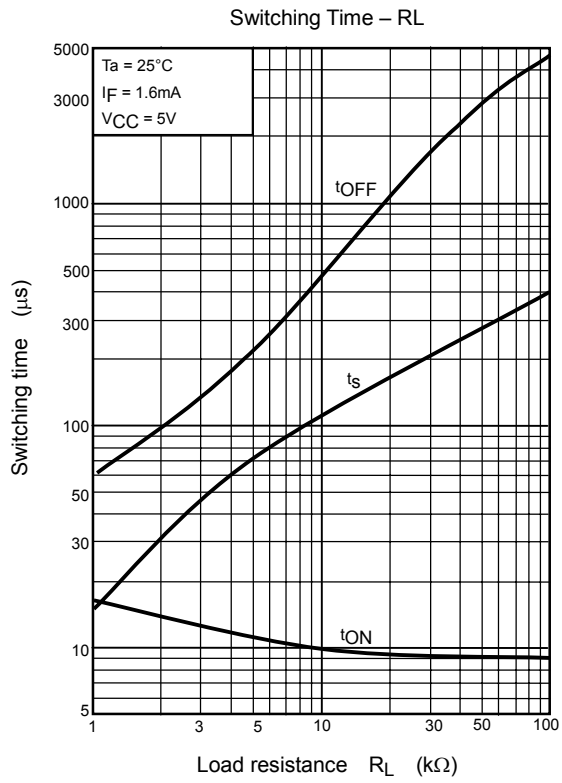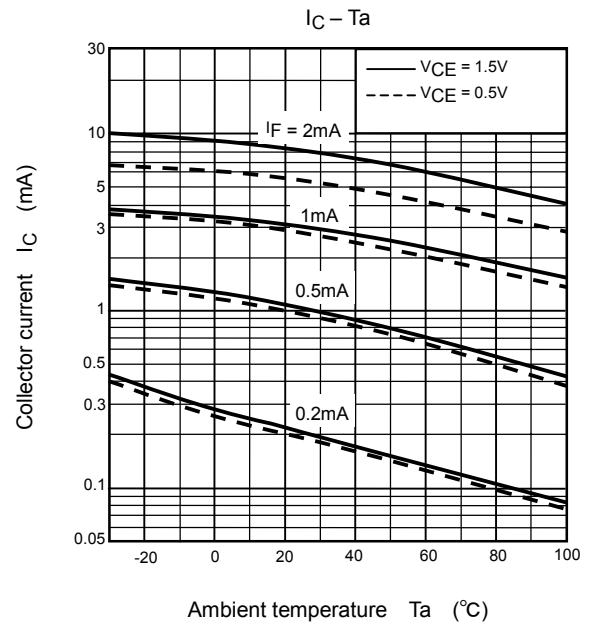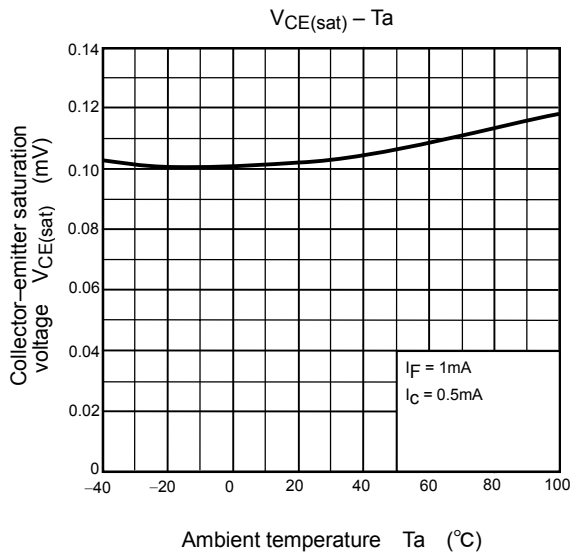

RESTRICTIONS ON PRODUCT USE

000707EBC

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Transistor Output Optocouplers](#) category:

Click to view products by [Toshiba](#) manufacturer:

Other Similar products are found below :

[LTV-814S-TA](#) [LTV-8241S](#) [LTV-824HS](#) [LTV-852S](#) [66095-001](#) [6N136-X017T](#) [MCT6-X007](#) [MOC8101-X017T](#) [PS2561-1-A](#) [PS2561A-1-W-A](#) [PS2561B-1-L-A](#) [PS2561L-1-V-A](#) [PS2706-1-A](#) [MRF658](#) [ELD207\(TA\)](#) [ILQ615-3X016](#) [LDA102S](#) [LDA110S](#) [SFH615AGR-X007T](#) [PS2561-1-V-W-A](#) [PS2561AL-1-V-A](#) [PS2561DL-1Y-F3-A](#) [PS2561L1-1-L-A](#) [PS2562-1-V-A](#) [PS2581L2-A](#) [PS2701A-1-F3-P-A](#) [PS2841-4A-AX](#) [PS2911-1-L-AX](#) [CNY17-2X017](#) [CNY17-4X001](#) [CNY17-4X017](#) [CNY17F-1X007](#) [CNY17F-2X017](#) [CNY17F-4X001](#) [CNY17F-4X017](#) [CNY17G-1](#) [LTV-702V](#) [LTV-702VB](#) [LTV-816S-TA](#) [LTV-844HS](#) [TCET1113](#) [TCET2100](#) [TCMT1113](#) [4N25-X007T](#) [4N35M_F132](#) [IL215AT](#) [ILD615-1X007](#) [ILQ2-X007](#) [VO217AT](#) [VOS615A-2T](#)