

F-361U

Electrical Specifications (@25C)

1. Maximum Power: 108 VA Max
2. Primary: 115/230V @ 50/60 Hz
3. Secondaries: 0-24/27/30/33/36V @ 3 Amps

Description:

The F-361U is a chassis mount power transformer that was designed with multiple secondaries to give the user maximum flexibility.

Safety:

These products are 100% hi-pot tested with an insulation of 1500V between primary and secondary windings as well as between the primary / secondary windings and the core.

Dimensions:

Units: inches

H	W	D	MW	MD
3.75	3.125	3.25	2.50	2.625

Weight: 5.65 lbs


Connections:

Primary – 22AWG, UL 1015, 7.0" ± 1.0", Skin & Tin: ¼" ± 1/16"

Secondary - 18AWG, UL 1015, 7.0" ± 1.0", Skin & Tin: ¼" ± 1/16"

For Input (115V): BLK and RED/BLK to YEL/BLK and BLK/GRN





For Input (230V): BLK to BLK GRN, Tie YEL/BLK to RED/BLK

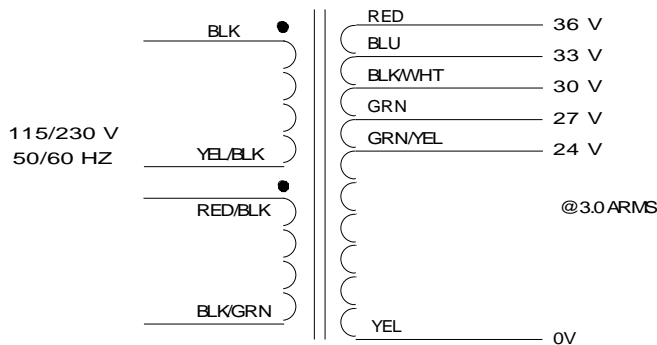

Technical note: Primary windings are designed to be connected in series or parallel.

RoHS Compliance: As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

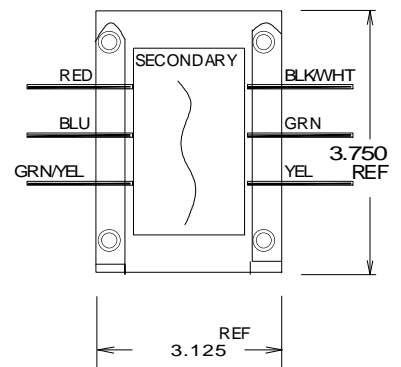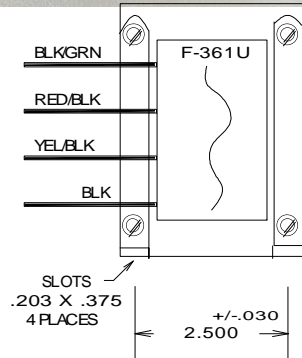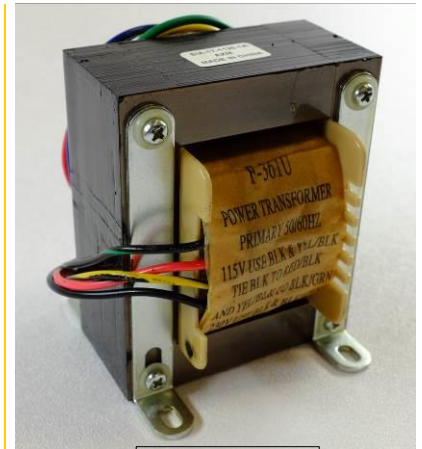

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Transformers](#) category:

Click to view products by [Triad](#) manufacturer:

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)