
RoHS Compliant Pb - Lead Free	Ltr	Revisions	Date	Appr

Electrical Specifications:

Nominal Frequency	16.000	MHz	
Mode of Oscillation	Fundamental	-	
Frequency Tolerance at 25°C	±30	DDM Max	
Frequency Stability over Temperature Range	±30	PPM Max	
Operating Temperature Range (Extended)	-40 to +85	• c	
Storage Temperature Range	-55 to +125		
Aging per Year	±3	PPM Max	
Load Capacitance	12	pF	
Shunt Capacitance (Maximum)	7		
Equivalent Series Resistance (ESR)	45	Ohms Max	
Drive Level	100 Typ - 500 Max	uW	
Solder Reflow Characteristics	+260 for 10 s Max	° C	

Mechanical Specifications:

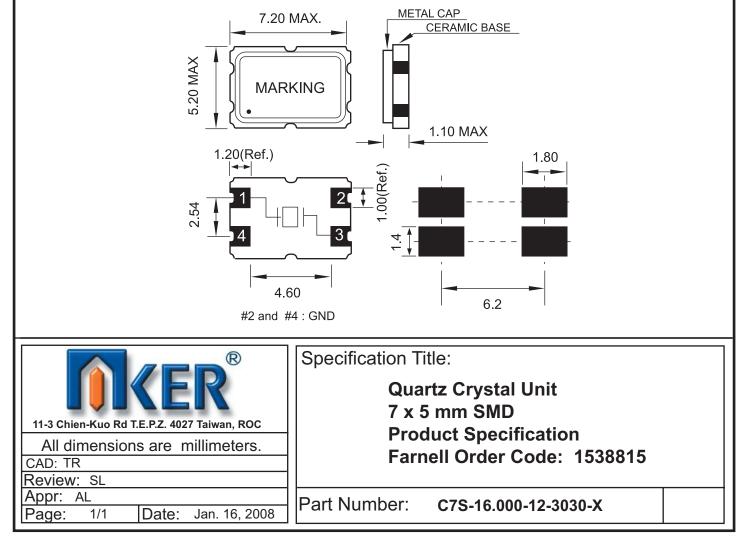

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for aker manufacturer:

Other Similar products are found below :

 SMA-027000-3BL4TD
 CXA-012000-3F4D40
 CXA-016384-3D4X20
 CXA-026000-3F7F20
 C-3.579545-18-3050-X
 49SN-027120-FX20X10

 SMF-020000-5BC6T0
 SMA-040000-5CL4T5
 CXAN-025000-3F12D40
 C-8.000-18-3050-X
 CXAN-040000-3F15D41
 SMBN-033333

 7BL4T00
 CXA-026000-3FCF20
 CA-18.432-18-3050-X
 CA-11.0592-18-3050-X
 C-4.194304-18-3050-X
 CXA-039000-7F1X40
 S33305

 50.000-X
 C3E-14.31818-12-3030-X
 S53305-50.000-X
 S73305-10.000-X-15
 C6S-18.432-12-3030-X
 C7S-8.000-12-50100-X1
 C

 24.576-18-3050-X
 C3E-14.7456-12-3030-X
 C7S-6.000-12-50100-X1
 CAA-4.194304-18-3050-X
 C3E-14.7456-12-50100-X1
 C6S

 16.000-12-3030-X
 S73305T-24.000-X-15-R
 CA-8.000-18-3050-X
 C3E-16.000-12-50100-X1
 S73305-12.000-X-15
 49S-008000-FDRD10

 S73305-14.7456-X-15
 C3E-18.432-12-3030-X
 C3E-20.000-12-50100-X1
 CAA-3.579545-18-3050-X
 C7S-20.000-12-3030-X
 C6S

 24.000-12-3030-X
 CA-25.000-18-3050-X
 CAA-16.000-18-3050-X
 49SN-011059-FX16X10
 C7S-24.000-12-50100-X1
 CA4-8.000-18-3050-X

 X
 C3E-12.000-12-3030-X
 C5S-20.000-12-3030-X
 C3E-13.560-12-1010-X
 S7A33025-156.250-L-X-R
 S7A33025-100.000-L-X-R