


DATA SHEET

Office
plus
SURGE PROTECTOR

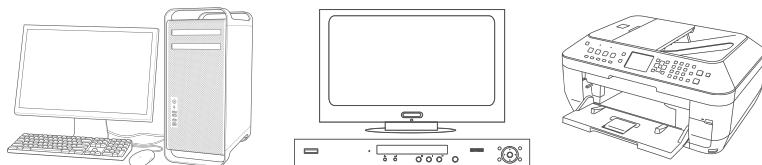

The OFFICE PLUS surge protector is an effective way of protecting office equipment against sudden power increases in the mains. In terms of design, the product is divided into two parts (protectors), for the user's convenience. The lower unit with four sockets can be located under the desk or in another place with difficult access, while the smaller, upper unit can be placed on top of the desk. This design makes it easier and more convenient to connect **phones, laptops** (with standard Polish plugs), **smartphones** or **tablets** (USB) to a secure source of power. At the same time, heavier, stationary equipment can stay connected to the bottom unit.

FEATURES

- Seven high efficiency sockets. All sockets have interlocks that prevent children from accessing dangerous components (Child Protection System).
- New protection technology - X3 MOV (X3 Metal Oxide Varistor Technology) - to protect the connected devices from power surges.
- Surge protection for all power supply lines (L-N, L-PE, N-PE).
- Signaling of correct operation of the surge protection feature (LED).
- Automatic fuse for restarting the protector in case of short circuit or overload, once the cause of the fault has been removed.
- Dual port USB charger for supplying power to devices requiring 5 V.
- Mount for fixing the protector vertically.
- 5 year warranty.
- Connected device insurance up to 2500 EUR.




2 PORTS USB CHARGER

2  **2,4A**

POWER CORD LENGTH

1,8m
+ 1,2

FRENCH OUTPUT OUTLETS

7 

ENERGY ABSORPTION UP TO

918J

INSURANCE OF CONNECTED DEVICE UP

2500
EUR

WARRANTY

5 YEAR

OUTLETS WITH CHILD PROTECTION SYSTEM










TECHNICAL DATA

PARAMETERS \ NAME	OFFICE PLUS
Part number	T/LZ06-OFF018/0000
Type	Surge protector
Rated voltage and frequency	~ 250 V / 50 Hz
Maximum current (total)	10 A
Single outlet maximum load	Circular 10 A, flat 6 A
Maximum power (total)	2500 W
Number and type of power outlets	5 + 2; in accordance with NF C 61-314; System Child Protection
Circuit breaker	1 x automatic fuse 10 A
Type of surge protection	SPD type 3
Protected lines	L - N, L - PE, N - PE
Energy absorption (total)	918 J
Test voltage $U_{OC(L-N)}$	6 kV
Test voltage $U_{OC(LN-PE)}$	6 kV
Voltage protection level $U_{P(L-N)}$	1,79 kV
Voltage protection level $U_{P(LN-PE)}$	1,79 kV
Continuous operating voltage U_c	~ 250 V
USB Charger	2x Port 5 V / 2,4 A (max)
Indicators	1x LED (Protected)
Plug	NF C 61-314
Power switch	2-pole lighted (Top Unit) 55 x 270 x 38 mm;
Dimensions [W x D x H]	60 x 178 x 50 mm Top Unit
Power cord length	1,8 m + 1,2 m
Net weight	816 g
Warranty	5 years
Insurance	2500 EUR


Note: The manufacturer reserves the right to modify the above parameters without prior notification.

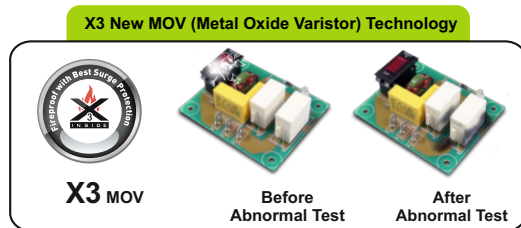


Automatic fuse

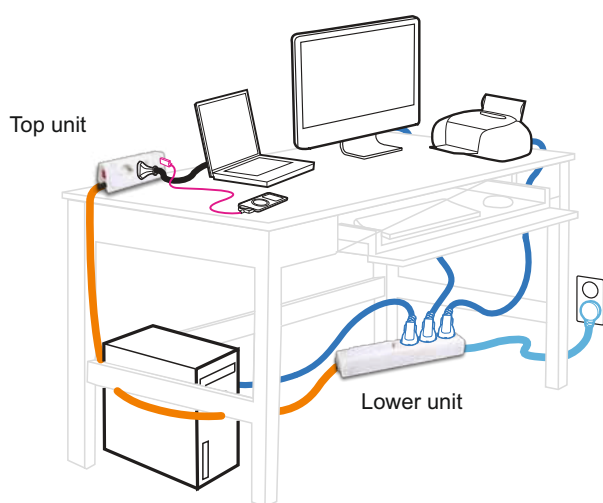

Highlighted unipolar switch
which excludes the bottom unit

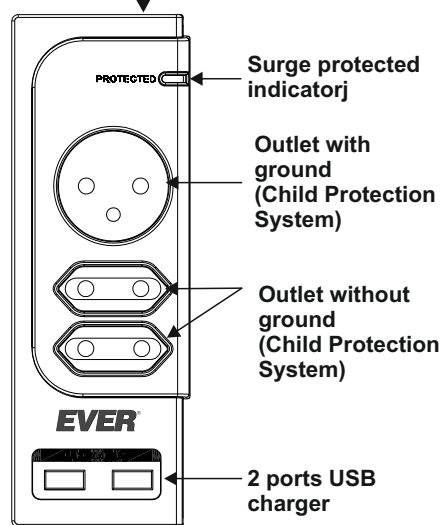

TOP UNIT

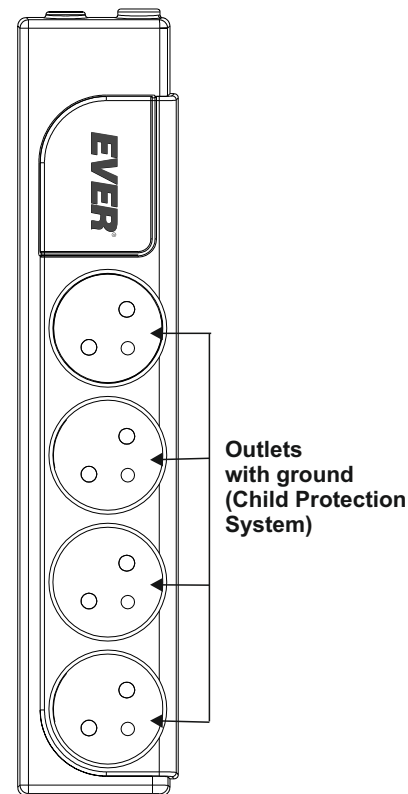

LOWER UNIT

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Ever](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-002LF](#)