

Driver LCI 150W 1750/2100/2450mA TEC C

advanced series

**Product description**

- _ Fixed output built-in LED driver
- _ Constant current LED driver
- _ Output current 1,750, 2,100 or 2,450 mA
- _ Max. output power 150 W
- _ Nominal lifetime up to 50,000 h
- _ For luminaires of protection class I and protection class II
- _ Temperature protection as per EN 61347-2-13 C5e
- _ Article LCI 150W 2100mA TEC C (87500271) has the KC approval mark.
- _ 5 years guarantee (conditions at <https://www.tridonic.com/manufacturer-guarantee-conditions>)

Housing properties


- _ Casing: polycarbonate, white
- _ Brush-coated for higher protection against humidity
- _ Type of protection IP20

Functions

- _ Overtemperature protection
- _ Overload protection
- _ Short-circuit protection
- _ No-load protection
- _ Burst protection voltage up to 2 kV
- _ Surge protection voltage up to 2 kV (L to N)
- _ Surge protection voltage up to 4 kV (L/N to earth)

Website

<http://www.tridonic.com/87500270>

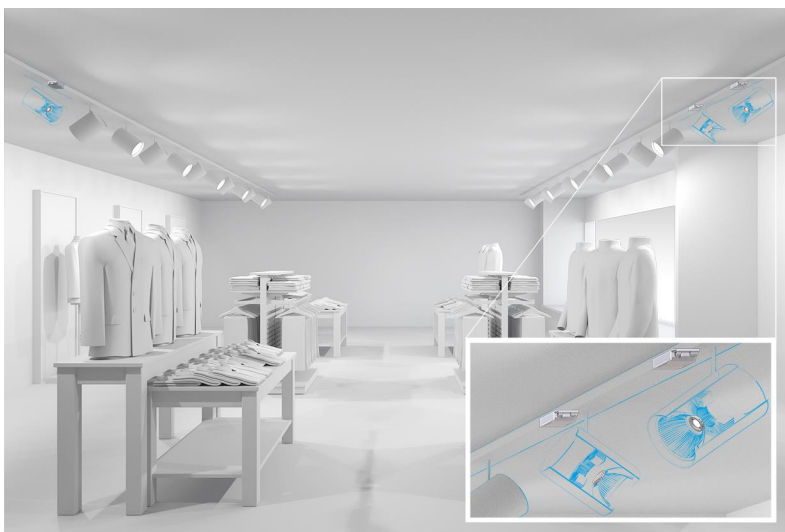

Spotlights



Downlights



Linear



Area



Floor | Wall



Free-standing



Street




Decorative



High bay

Driver LCI 150W 1750/2100/2450mA TEC C

advanced series

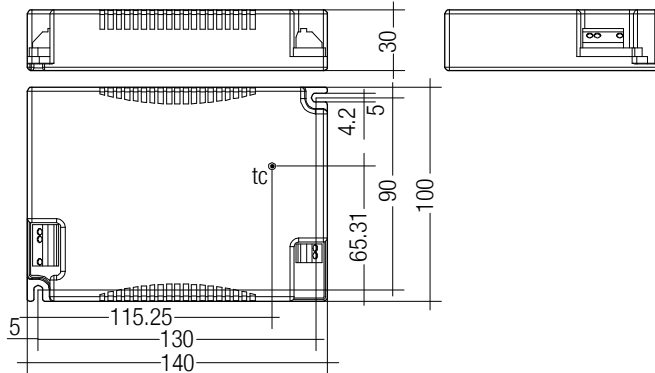

Ordering data

Type	Article number	Packaging, carton	Packaging, low volume	Packaging, high volume	Weight per pc.
LCI 150W 1750mA TEC C	87500270	10 pc(s).	240 pc(s).	1,200 pc(s).	0.329 kg
LCI 150W 2100mA TEC C	87500271	10 pc(s).	240 pc(s).	1,200 pc(s).	0.328 kg
LCI 150W 2450mA TEC C	87500272	10 pc(s).	240 pc(s).	1,200 pc(s).	0.328 kg

Technical data

Rated supply voltage	220 – 240 V
AC voltage range	198 – 264 V
Rated current (at 230 V, 50 Hz)	0.7 A
Mains frequency	50 / 60 Hz
Overvoltage protection	300 V AC, 1 h
Max. input power	170 W
Output power range	75 – 150 W
THD (at 230 V, 50 Hz, full load)	< 10 %
THD (at 230 V, 50 Hz, min. load)	< 20 %
Output current tolerance ^①	± 7.5 %
Typ. current ripple (at 230 V, 50 Hz, full load)	< 3 %
Output P_ST_LM (at full load)	≤ 1
Output SVM (at full load)	≤ 0.4
Starting time (at 230 V, 50 Hz, full load)	≤ 0.5 s
Turn off time (at 230 V, 50 Hz, full load)	≤ 0.5 s
Hold on time at power failure (output)	0 s
Ambient temperature ta	-25 ... +60 °C
Ambient temperature ta (at lifetime 50,000 h)	60 °C
Max. casing temperature tc	95 °C
Storage temperature ts	-40 ... +80 °C
Type of protection	IP20
Lifetime	up to 50,000 h
Guarantee (conditions at www.tridonic.com)	5 Year(s)
Dimensions L x W x H	140 x 100 x 30 mm

Approval marks



Standards

EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-13, EN 61547, EN 62384

Specific technical data

Type	Output current ^①	Typ. power consumption (at 230 V, 50 Hz, full load)	λ at full load	Efficiency at full load ^②	λ over full operating range (min.)	Efficiency at min. load ^②	Min. forward voltage	Max. forward voltage	Max. output voltage (U-OUT) ^②	Max. peak output current ^②
LCI 150W 1750mA TEC C	1,750 mA	158.5 W	0.98	94.5 %	0.93C	91.0 %	43.0 V	86.0 V	90 V	2,625 mA
LCI 150W 2100mA TEC C	2,100 mA	158.5 W	0.99	94.0 %	0.95	91.0 %	35.5 V	71.5 V	76 V	3,150 mA
LCI 150W 2450mA TEC C	2,450 mA	160.0 W	0.99	93.5 %	0.94C	89.5 %	30.5 V	61.0 V	65 V	3,675 mA

① Output current is mean value.

② Test result at 230 V, 50 Hz.

Standards

EN 55015
 EN 61000-3-2
 EN 61000-3-3
 EN 61347-1
 EN 61347-2-13
 EN 61547
 EN 62384

Overload protection

If the maximum load is exceeded by a defined internal limit, the LED driver reduces the LED output current. After elimination of the overload the nominal operation is restored automatically.

Overtemperature protection

The LED driver is protected against temporary thermal overheating. If the temperature limit is exceeded, the unit shuts down itself and then turns on when it cools down. After the elimination of over temperature fault, the nominal operation is restored automatically. The temperature protection is activated typically at 6 °C above t_c max.

Short-circuit behaviour

In case of a short circuit on the secondary side (LED) the LED driver will latch-up. The LED driver will recover itself when the short-circuit fault is removed and the AC is recycled (turn off the AC for longer than 0.5 s and then turn on).

No-load operation

The LED driver works in constant voltage mode. In no-load operation the output voltage will not exceed the specified max. output voltage (no-load voltage, refer to page 1).

Expected lifetime

Type	t_a	40 °C	50 °C	60 °C	65 °C
LCI 150W 1750mA TEC C	t_c	75 °C	85 °C	95 °C	x
	Lifetime	100,000 h	80,000 h	50,000 h	x
LCI 150W 2100mA TEC C	t_c	75 °C	85 °C	95 °C	x
	Lifetime	100,000 h	80,000 h	50,000 h	x
LCI 150W 2450mA TEC C	t_c	75 °C	85 °C	95 °C	x
	Lifetime	100,000 h	80,000 h	50,000 h	x

The LED drivers are designed for a lifetime stated above under reference conditions and with a failure probability of less than 10 %.

The relation of t_c to t_a temperature depends also on the luminaire design. If the measured t_c temperature is approx. 5 K below t_c max., t_a temperature should be checked and eventually critical components (e.g. ELCAP) measured. Detailed information on request.

Maximum loading of automatic circuit breakers in relation to inrush current

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current	
Installation Ø	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	I_{max}	Time
LCI 150W 1750mA TEC C	6	8	10	12	3	4	5	6	75 A	235 µs
LCI 150W 2100mA TEC C	6	8	10	12	3	4	5	6	75 A	235 µs
LCI 150W 2450mA TEC C	6	8	10	12	3	4	5	6	75 A	235 µs

These are max. values calculated out of inrush current! Please consider not to exceed the maximum rated continuous current of the circuit breaker.

Calculation uses typical values from ABB series S200 as a reference.

Actual values may differ due to used circuit breaker types and installation environment.

Harmonic distortion in the mains supply (at 230 V / 50 Hz and full load) in %

	THD	3.	5.	7.	9.	11.
LCI 150W 1750mA TEC C	10	7	3	2	2	2
LCI 150W 2100mA TEC C	10	4	3	1	1	1
LCI 150W 2450mA TEC C	10	3	2	1	1	1

Conditions of use and storage

Humidity: 5 % up to max. 95 %, not condensed (max. 56 days/year at 95 %)

Storage temperature: -40 °C up to max. +80 °C

The devices have to be within the specified temperature range (t_a) before they can be operated.

Glow-wire test

according to EN 61347-1 with increased temperature of 850 °C passed.

Installation instructions

The LED module and all contact points within the wiring must be sufficiently insulated against 500 V surge voltage. Creepage distances and clearances must be maintained.


Replace LED module

1. Mains off
2. Remove LED module
3. Wait for 10 seconds
4. Connect LED module again

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

Wiring type and cross section

For wiring use stranded wire with ferrules or solid wire from 0.5 – 1.5 mm². Strip 8.5 – 9.5 mm of insulation from the cables to ensure perfect operation of the push-wire terminals (WAGO 250).




Wiring instructions

The secondary leads should be separated from the mains connections and wiring for good EMC performance. Maximum lead length on secondary side is 2 m. For a good EMC performance keep the the LED wiring as short as possible.

Release of the wiring

Press down the “push button” and remove the cable from front.




Mounting of device

Max. torque for fixing: 0.5 Nm/M4

Wiring guidelines

- All connections must be kept as short as possible to ensure good EMI behaviour.
- Mains leads should be kept apart from LED driver and other leads (ideally 5 – 10 cm distance)
- Max. length of output and I sel wires is 2 m.
- Secondary switching is not permitted.
- Incorrect wiring can damage LED modules.
- To avoid the damage of the Driver, the wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.).

Wiring diagram

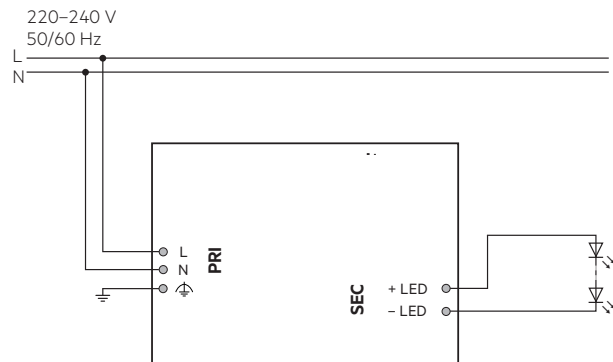

Insulation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an insulation test with 500 V_{DC} for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal. The insulation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V_{AC} (or 1.414 x 1500 V_{DC}). To avoid damage to the electronic devices this test must not be conducted.

Conditions of use

The LED driver is declared as inbuilt LED controlgear, meaning it is intended to be used within a luminaire enclosure. If the product is used outside a luminaire, the installation must provide suitable protection for people and environment (e.g. in illuminated ceilings).

Maximum number of switching cycles

All LED driver are tested with 50,000 switching cycles.


Additional information

Additional technical information at www.tridonic.com → Technical Data


Lifetime declarations are informative and represent no warranty claim. No warranty if device was opened.

Diagrams LCI 150W 1,750mA TEC C


Efficiency vs Load

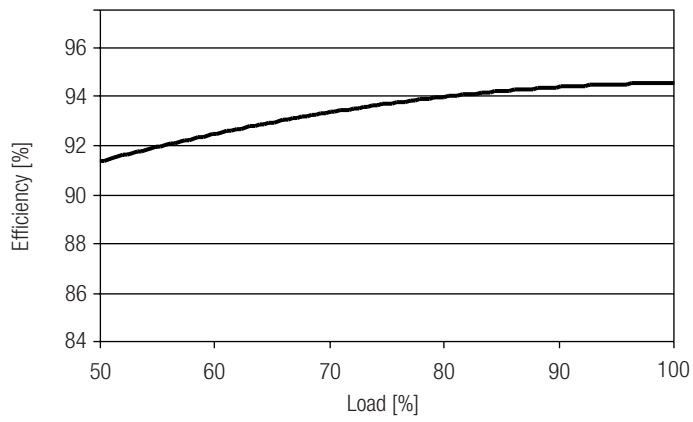


Power factor vs Load

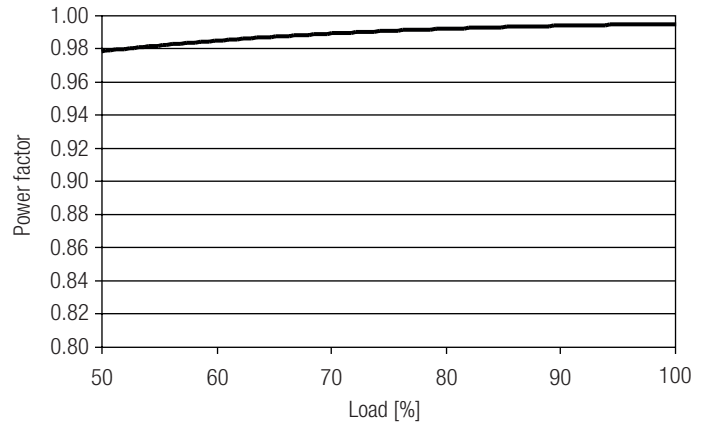


THD vs Load

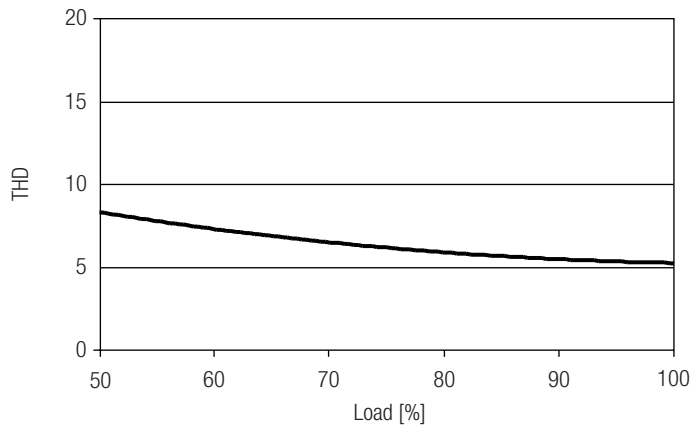

Input current vs load

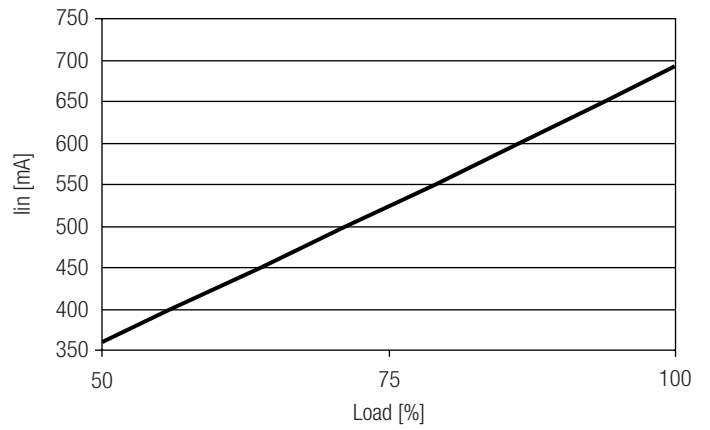


Input power vs load

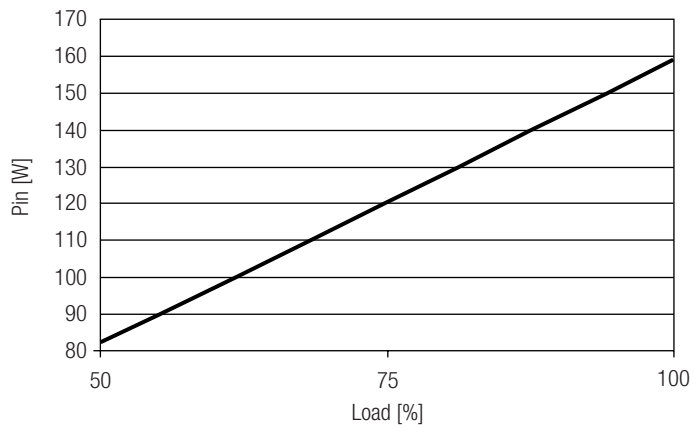


Diagrams LCI 150W 2,100mA TEC C


Efficiency vs Load

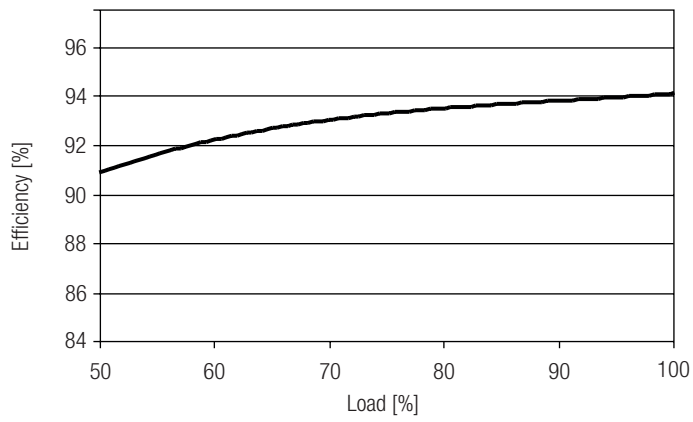


Power factor vs Load

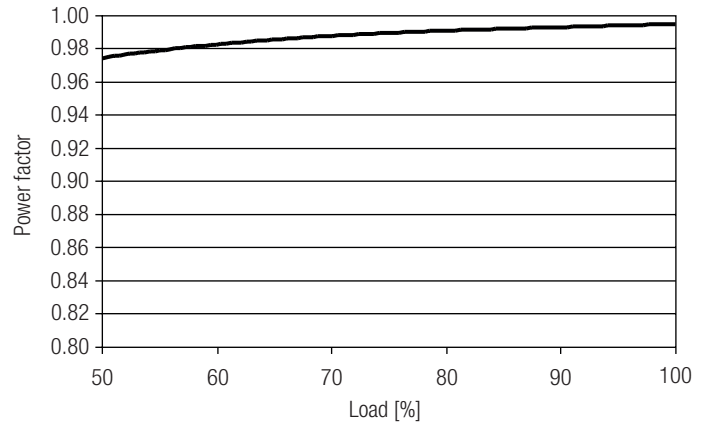


THD vs Load

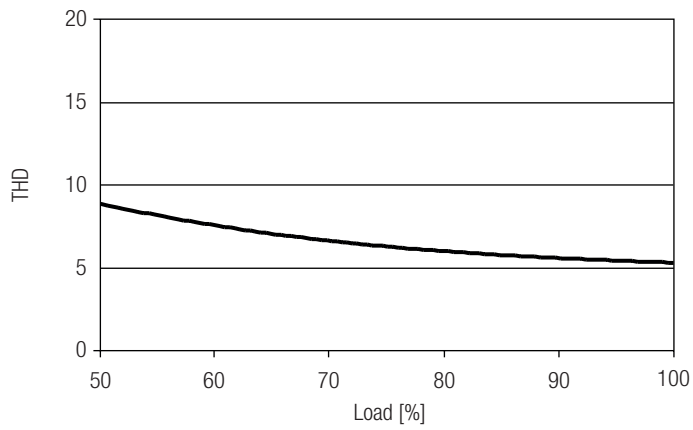

Input current vs load

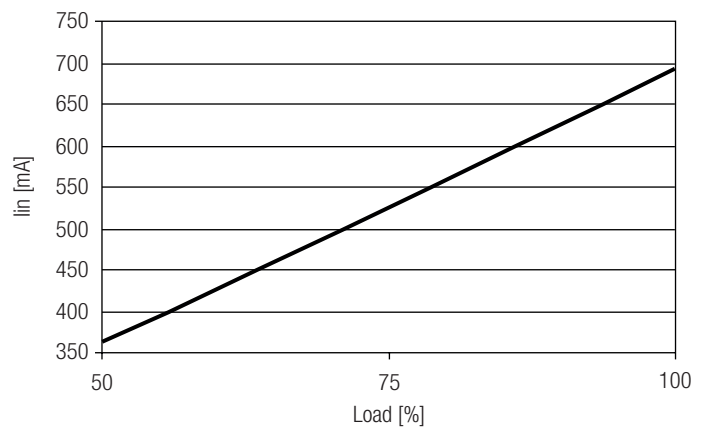


Input power vs load

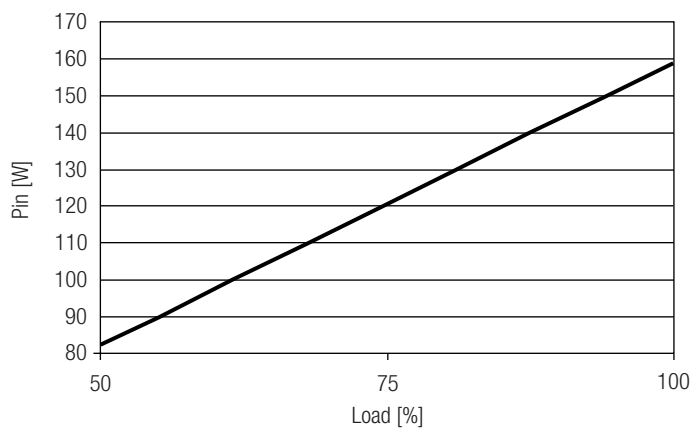


Diagrams LCI 150W 2,450mA TEC C


Efficiency vs Load

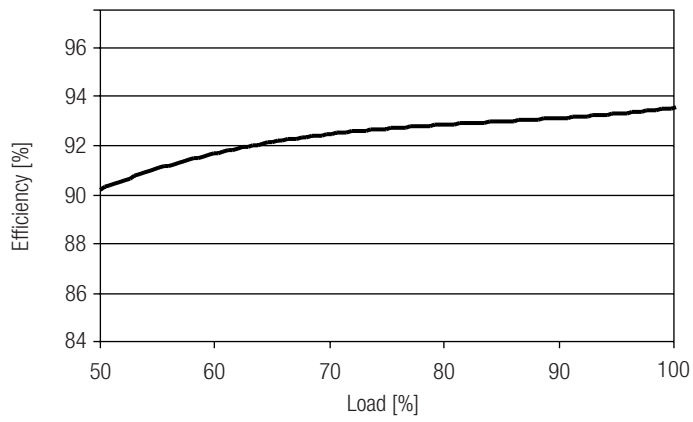


Power factor vs Load

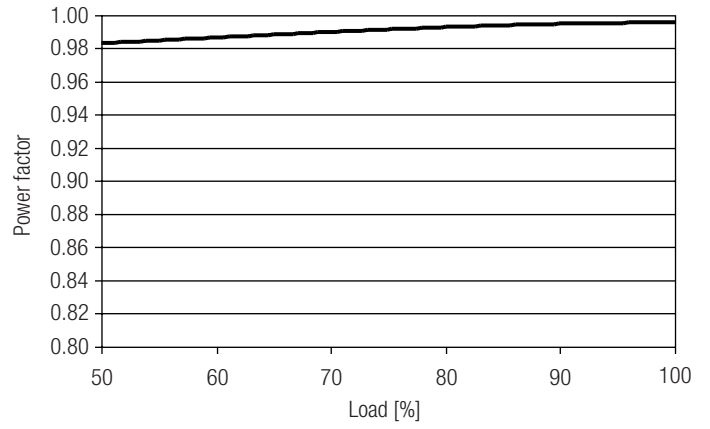


THD vs Load

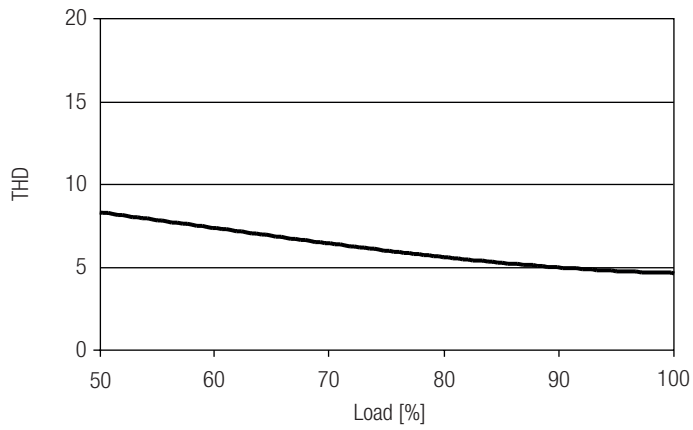

Input current vs load

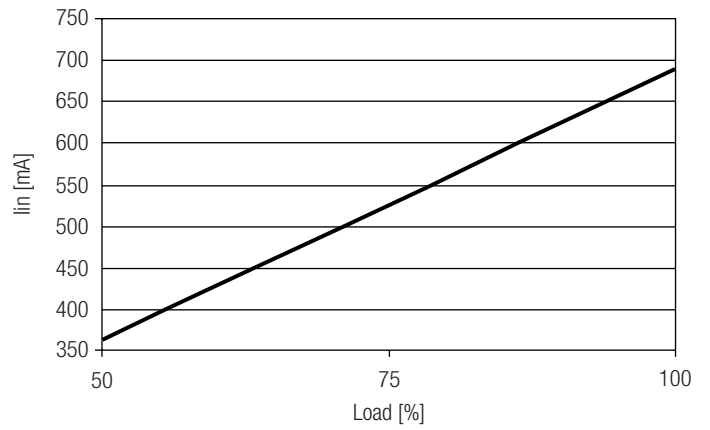

Input power vs load

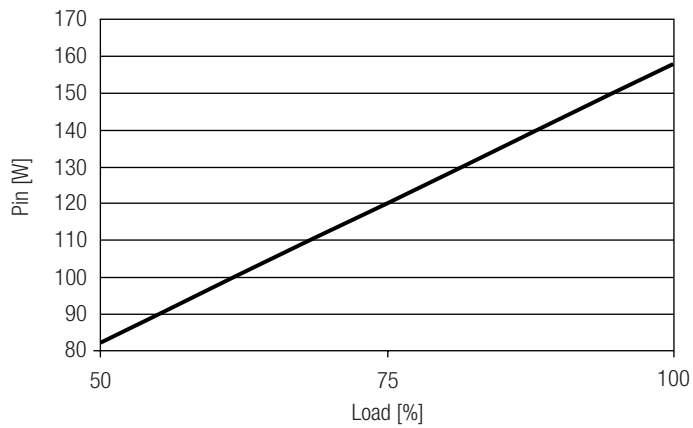

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Tridonic](#) manufacturer:

Other Similar products are found below :

[PIFC-K250F](#) [PITB-K222A](#) [AC-A60VD24H2.5](#) [ALD-514012PJ134](#) [PWD-60-1-70-P](#) [ESS030W-1050-21](#) [BPOXL 4-12-035](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#) [ESS010W-0500-12](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [HVG-240-54AB](#) [OTE 25/220-240/700 PC](#) [OT FIT 30/220-240/700 CS](#) [DAL30W-0600-42-T](#) [HVG-320-48AB](#) [CNB30W-0600-42-CAS](#) [87500757](#) [I-SELECT 2 PLUG 2100MA BL](#) [LCU 48V 75W DC-STR FO](#) [LC 45 W 500-1400 MA FLEXC SC EXC](#) [I-SELECT 2 PLUG 2000MA BL](#) [LC 50/200-350/170 FLEXCC LP SNC3](#) [LCO 14/100-500/38 O4A NF C EXC3](#) [LC 28W 300-700MA 42 FLEXC NF SC EXC3](#) [LC 44/1050/42 FIXC SRL ADV2](#) [LCA 60W 900-1750MA ONE4ALL C PRE](#) [LC 8/180/44 FIXC SR SNC2](#) [LC 19/200-350/54 FLEXC LP SNC4](#) [BXDR-PS-75BS-E116D-01-A](#) [LC 30/500/54 FIXC SR SNC2](#) [LCA 60W 24V ONE4ALL SC PRE SP](#) [LC 60W 75-330MA 310V FLEXC NF H16 EXC4](#) [LC 8/180/42 FIXC PC SR SNC2](#) [LC 10/350/29 FIXC SR SNC2](#) [LC 25/500/43 FIXC SR SNC2](#) [LC 50/100-400/140 PO4A NF H16 PRE3](#) [LC 25/600/42 FIXC SRL ADV2](#) [LCO 24/200-1050/39 NF C ADV3](#) [ELEMENT 35/220...240/900 G3](#) [LC 25W 350-1050MA FLEXC SR EXC](#) [LC 35W 24 ONE4ALL IP PRE](#) [BXDR-PS-25BS-E107D-01-A](#) [LC 17W 250-700MA FLEXC SR EXC](#) [LC 15W 350MA FIXC C SNC](#) [LC 14W 700MA FIXC PC SR SNC2](#) [LC 200W 24V SC SNC](#)