


Photologic® Slotted Optical Switch
OPB615, OPB616, OPB617, OPB618 Series
OPB625, OPB626, OPB627, OPB628 Series
OPB665, OPB666, OPB667, OPB668 (N and T Series)



Features:

- Non-contact switching
- PCBoard mounting
- Enhanced signal to noise ratio
- Choice of four Logical output options

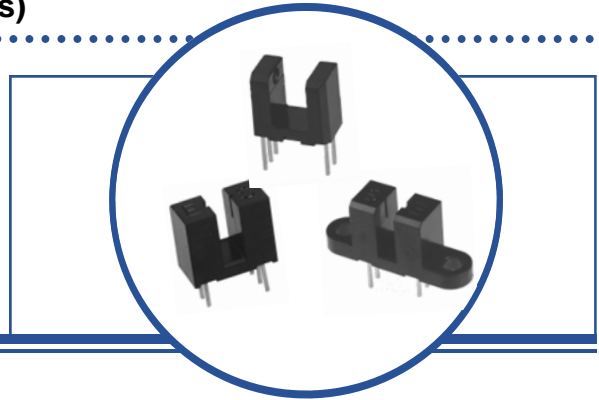

Description:

Each **OPB615**, **OPB625** and **OPB665** series slotted optical switch consists of an 890 nm, infrared Light Emitting Diode (LED) and a monolithic integrated circuit that incorporates a photodiode, a linear amplifier and a Schmitt trigger on a single silicon chip. **OPB665** offers two mounting options -- no tabs (N) or two tabs (T).

All devices in this series exhibit performance over supply voltages ranging from 4.5 V to 16.0 V, and may be specified as Buffered or Inverted with 10 kW Pull-up or Open Collector output. Devices are also TTI/LSTTL compatible and can drive up to 10 TTL loads.

Custom electrical, wire and cabling and connectors are available. Contact your local representative or OPTEK for more information.

Applications:

- Mechanical switch replacement
- Speed indication (tachometer)
- Mechanical limit indication
- Edge sensing

Ordering Information					
Part Number	Package Style	Sensor Photologic®	Aperture Emitter / Sensor	Slot Width / Depth	Lead Length / Spacing
OPB615	N	10K Pull-up	None	0.150" / 0.240"	0.100" (min) / 0.275"
OPB616		Open Collector			
OPB617		Inv-10K Pull-up			
OPB618		Inv-Open Collector			
OPB625		10K Pull-up	None	0.190" / 0.285"	0.100" (min) / 0.320"
OPB626		Open Collector			
OPB627		Inv-10K Pull-up			
OPB628		Inv-Open Collector			
OPB665N		10K Pull-up	0.05" / 0.01"	0.125" / 0.345"	
OPB666N		Open Collector			
OPB667N		Inv-10K Pull-Up			
OPB668N		Inv-Open Collector			
OPB665T		10K Pull-up			
OPB666T		Open Collector			
OPB667T		Inv-10K Pull-up			
OPB668T		Inv-Open Collector			




RoHS

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


Photologic® Slotted Optical Switch
OPB615, OPB616, OPB617, OPB618 Series
OPB625, OPB626, OPB627, OPB628 Series
OPB665, OPB666, OPB667, OPB668 (N and T Series)




OPB615/625/665N Buffered 10K Pull-Up

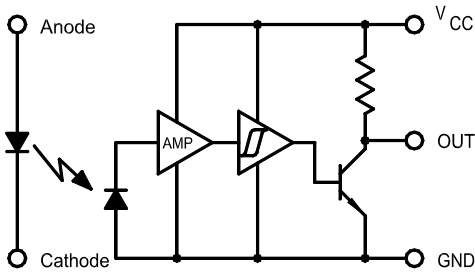


OPB 616/626/666N Buffered Open-Collector

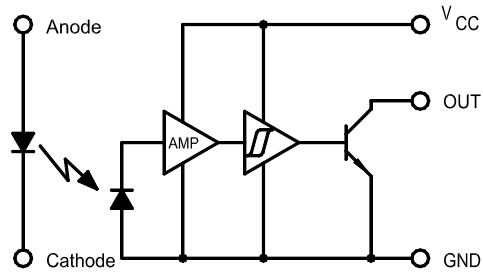


OPB617/627/667N Inverted 10K Pull-Up

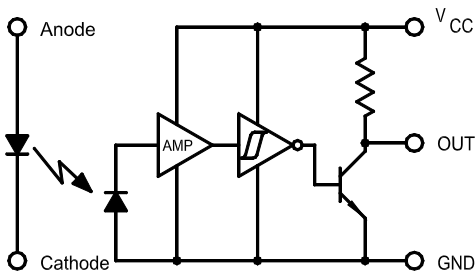

OPB618/628/668N Inverted Open-Collector

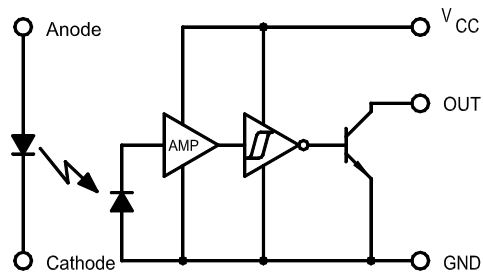

OPB615, OPB616, OPB617, OPB618

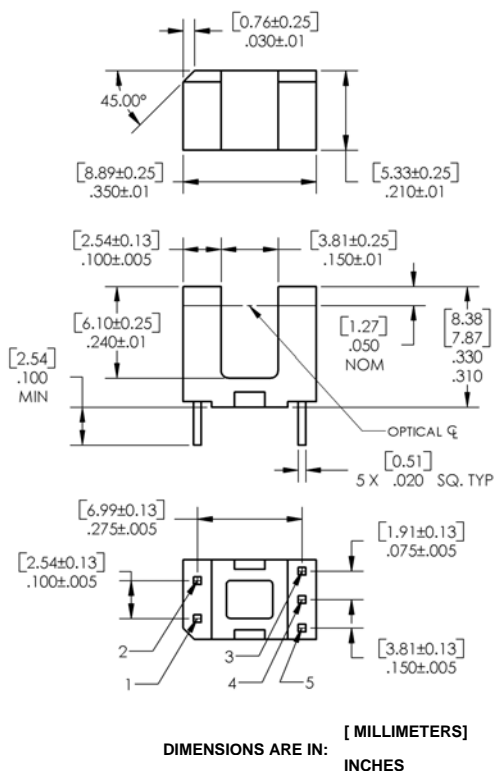

Pin Color/ Number	Description
1	Anode
2	Cathode
3	Vcc
4	Output
5	Ground


OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Photologic® Slotted Optical Switch
OPB615, OPB616, OPB617, OPB618 Series
OPB625, OPB626, OPB627, OPB628 Series
OPB665, OPB666, OPB667, OPB668 (N and T Series)




OPB625, OPB626, OPB627, OPB628

Pin Color/ Number	Description
1	Anode
2	Cathode
3	Vcc
4	Output
5	Ground

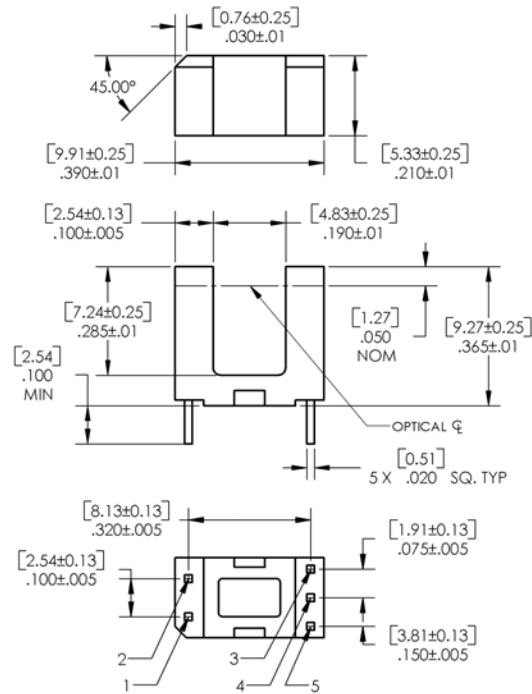

OPB665, OPB666, OPB667, OPB668 (N and T)

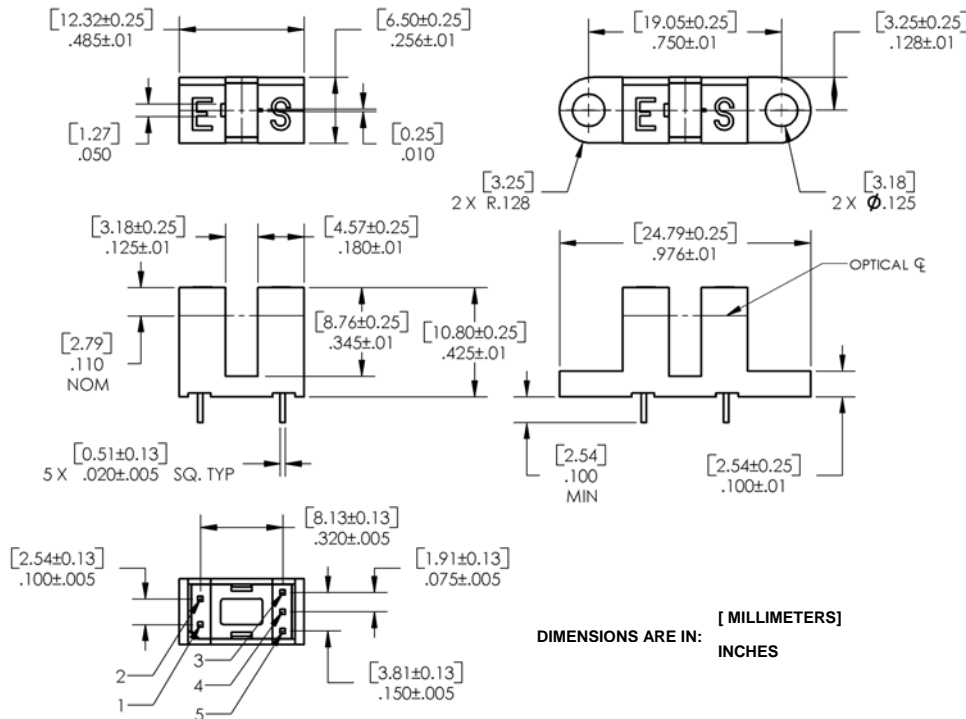

DIMENSIONS ARE IN: [MILLIMETERS]
INCHES

Pin Color/ Number	Description
1	Anode
2	Cathode
3	Vcc
4	Output
5	Ground

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Photologic® Slotted Optical Switch
OPB615, OPB616, OPB617, OPB618 Series
OPB625, OPB626, OPB627, OPB628 Series
OPB665, OPB666, OPB667, OPB668 (N and T Series)



Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Storage & Operating Temperature Range	-40° C to +100° C
Lead Soldering Temperature (1/16 inch (1.6mm) from the case for 5 sec. with soldering iron) ⁽¹⁾	260° C

Input Diode

Forward DC Current	50 mA
Peak Forward Current (1 μs pulse width, 300 pps)	3 A
Reverse DC Voltage	3 V
Power Dissipation ⁽²⁾	100 mW

Output Photologic®

Supply Voltage, V_{CC}	18 V
Duration of Output Short to V_{CC}	1 second
Voltage at Output ⁽⁵⁾	V_{CC}
Low Level Output Current (sinking)	16 mA
Power Dissipation ⁽³⁾	240° mW

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
- (2) Derate linearly 1.33 mW/° C above 25° C.
- (3) Derate linearly 2.50 mW/° C above 25° C.
- (4) Normal application would be with light source blocked, simulated by $I_F = 0$ mA.
- (5) Open Collector devices = 30 volts

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
--------	-----------	-----	-----	-----	-------	-----------------

Input Diode

V_F	Forward Voltage	-	-	1.6	V	$I_F = 10$ mA
I_R	Reverse Current	-	-	100	μA	$V_R = 3$ V

Output Photologic® Sensor

V_{CC}	Operating DC Supply Voltage	4.5	-	16	V	
$I_{F(+)}$	LED Positive-Going Threshold Current	0.1	0.55	3	mA	$V_{CC} = 5$ V
		0.1	0.6	3		
		0.1	1.6	10		
$I_{F(+)} / I_{F(-)}$	Hysteresis	1.05	1.20	1.90		$V_{CC} = 5$ V

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Photologic® Slotted Optical Switch
OPB615, OPB616, OPB617, OPB618 Series
OPB625, OPB626, OPB627, OPB628 Series
OPB665, OPB666, OPB667, OPB668 (N and T Series)



Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS	
Output Photologic® Sensor							
I_{CCH}	High Level Supply Current: Buffer, 10k Pull-up Buffer, Open-Collector	OPB615, 625, 665 OPB616, 626, 666	- -	5 5	12 12	mA mA	NO LOAD on Output ⁽³⁾
	Inverted, 10k Pull-up Inverted, Open-Collector	OPB617, 627, 667 OPB618, 628, 668	- -	4 4	12 12	mA mA	NO LOAD on Output $I_F = 0$ mA
I_{CCL}	Low Level Supply Current: Buffer, 10k Pull-up Buffer, Open-Collector	OPB615, 625, 665 OPB616, 626, 666	- -	5.5 4.0	12 12	mA mA	NO LOAD on Output $I_F = 0$ mA
	Inverted, 10k Pull-up Inverted, Open-Collector	OPB617, 627, 667 OPB618, 628, 668	- -	6.5 5.0	12 12	mA mA	NO LOAD on Output ⁽³⁾
V_{OH}	High Level Output Voltage: Buffer, 10k Pull-up Buffer, Open-Collector	OPB615, 625, 665 OPB616, 626, 666	$V_{CC}-1.5$ -	- -	- -	V V	$I_{OH} = 100 \mu\text{A}^{(3)}$
	Inverter, 10k Pull-up Inverter, Open-Collector	OPB617, 627, 667 OPB618, 628, 668	$V_{CC}-1.5$ -	- -	- -	V V	$I_{OH} = 100 \mu\text{A}^{(1)}$ $I_F = 0$ mA
I_{OH}	High Level Output Voltage: Buffer, Open-Collector	OPB616, 626, 666	-	-	100	μA	$V_{OH} = 30 \text{ V}^{(3)}$
	Inverter, Open-Collector	OPB618, 628, 668	-	-	100	μA	$I_F = 0$ mA, $V_{OH} = 30 \text{ V}^{(1)}$
V_{OL}	Low Level Output Voltage: Buffer, 10k Pull-up Buffer, Open-Collector	OPB615, 625, 665 OPB616, 626, 666	-	-	0.4	V	$I_{OL} = 16$ mA, $V_{CC} = 4.5 \text{ V}^{(3)(1)}$
	Inverter, 10k Pull-up Inverter, Open-Collector	OPB617, 627, 667 OPB618, 628, 668	-	-	0.4	V	$I_{OL} = 16$ mA, $I_F = 0$ mA
t_r, t_f	Output Rise Time, Output Fall Time		30			ns	$f = 10$ kHz, $R_L = 300 \Omega$, DC = 50% ⁽³⁾
t_{PLH}	Propagation Delay, Low-High Buffer, 10k Pull-up Buffer, Open-collector	OPB615, 625, 665 OPB616, 626, 666		0.6		μs	
	Inverter, 10k Pull-up Inverter, Open-Collector	OPB617, 627, 667 OPB618, 628, 668		3.0		μs	
t_{PHL}	Propagation Delay, High-Low Buffer, 10k Pull-up Buffer, Open-collector	OPB615, 625, 665 OPB616, 626, 666		3.0		μs	
	Inverter, 10k Pull-up Inverter, Open-Collector	OPB617, 627, 667 OPB618, 628, 668		0.6		μs	
Data Rate		-	100	-		kHz	$R_L = 300 \Omega$, DC = 50% ⁽⁴⁾

Notes:


- (1) Normal application would be with light source blocked, simulated by $I_F = 0$ mA.
- (2) $V_{OH} = V_{CC}-1.5\text{V}$ for $V_{CC} = 4.5$ to 16 Volts.
- (3) $I_F = 5$ mA OPB615 to OPB628; $I_F = 10$ mA OPB665 to OPB668
- (4) $I_F = 0$ to 5 mA OPB615 to OPB628; $I_F = 0$ to 10 mA OPB665 to OPB668

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


Photologic® Slotted Optical Switch
OPB615, OPB616, OPB617, OPB618 Series
OPB625, OPB626, OPB627, OPB628 Series
OPB665, OPB666, OPB667, OPB668 (N and T Series)





OPB615 - Flag next to Emitter

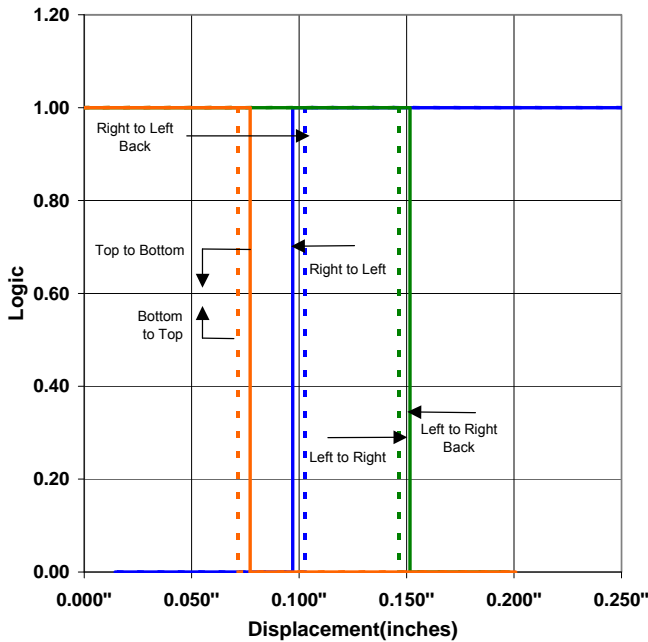

OPB615 - Flag next to Sensor

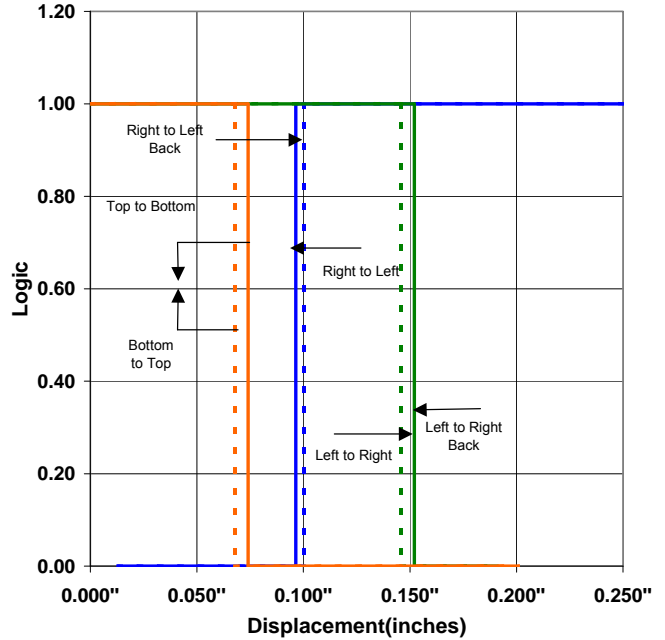

OPB615 - Flag in Middle of Slot

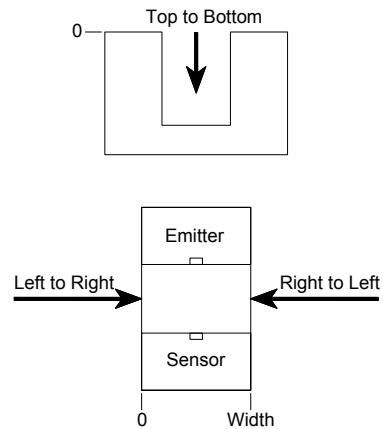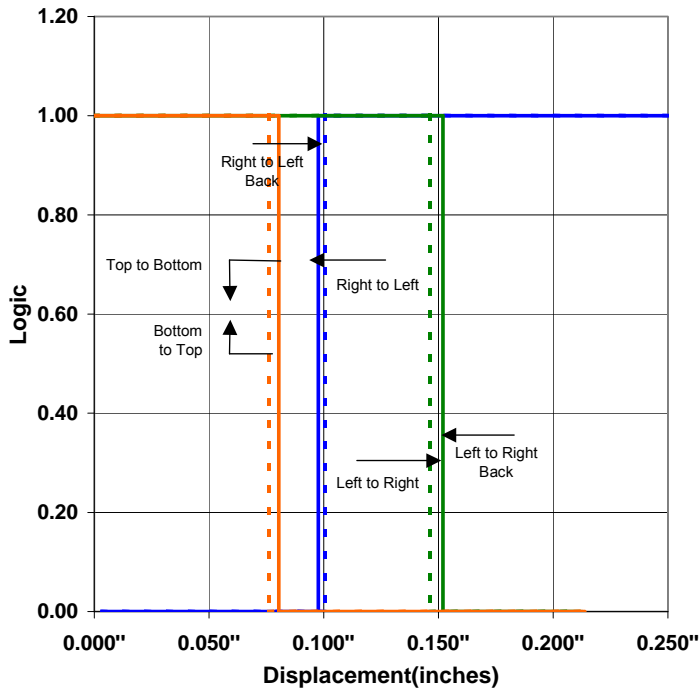


OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


Photologic® Slotted Optical Switch
OPB615, OPB616, OPB617, OPB618 Series
OPB625, OPB626, OPB627, OPB628 Series
OPB665, OPB666, OPB667, OPB668 (N and T Series)





OPB625 - Flag Next to Emitter

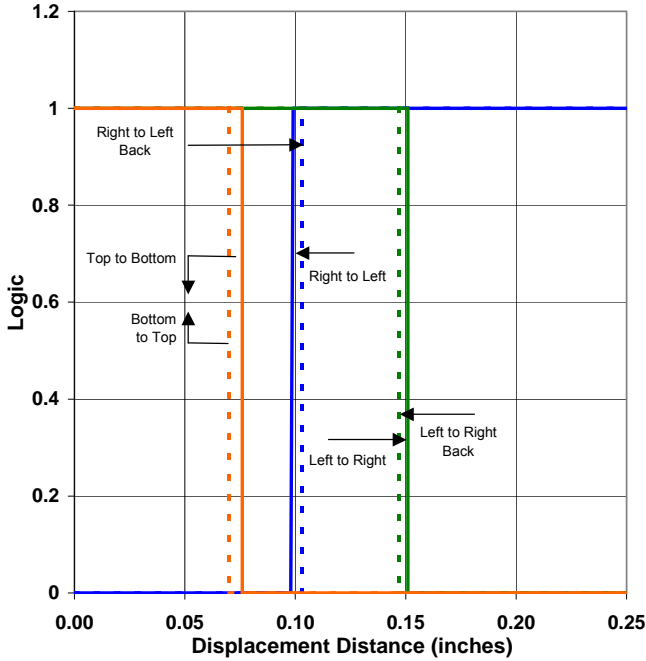

OPB625 - Flag Next to Sensor

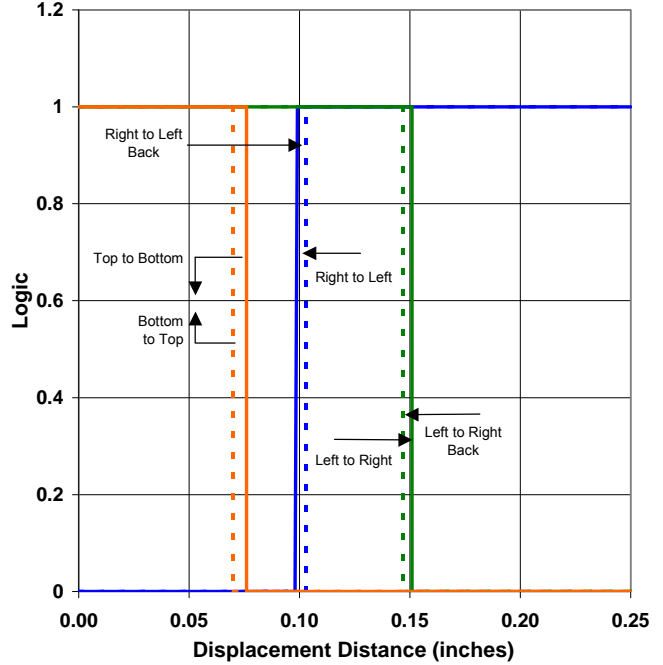

OPB625 - Flag in Middle of Slot

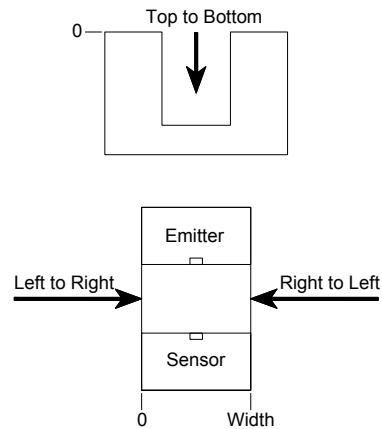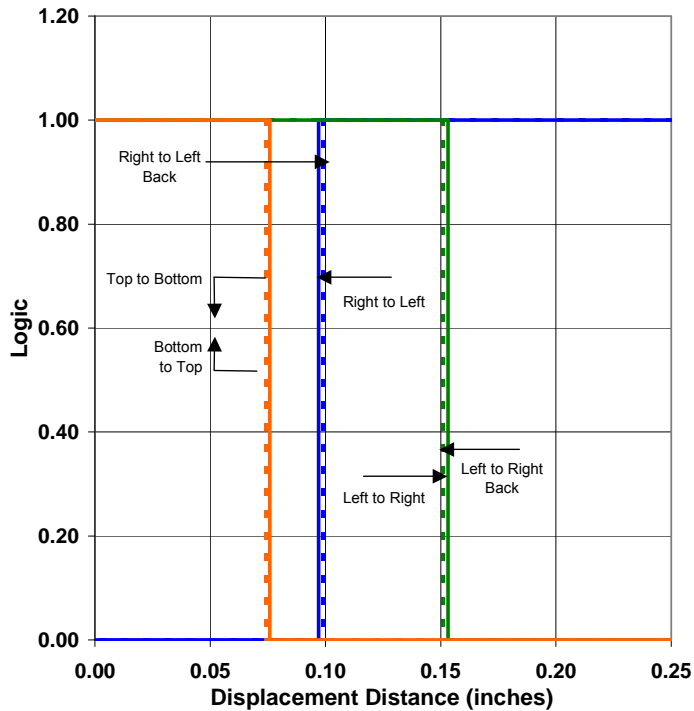


OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


Photologic® Slotted Optical Switch
OPB615, OPB616, OPB617, OPB618 Series
OPB625, OPB626, OPB627, OPB628 Series
OPB665, OPB666, OPB667, OPB668 (N and T Series)





OPB665 - Flag next to Emitter

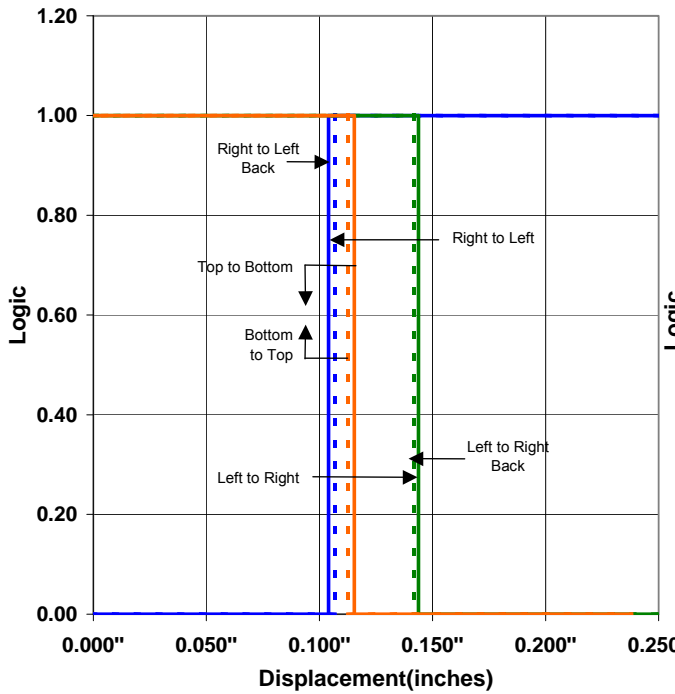

OPB665 - Flag next to Sensor

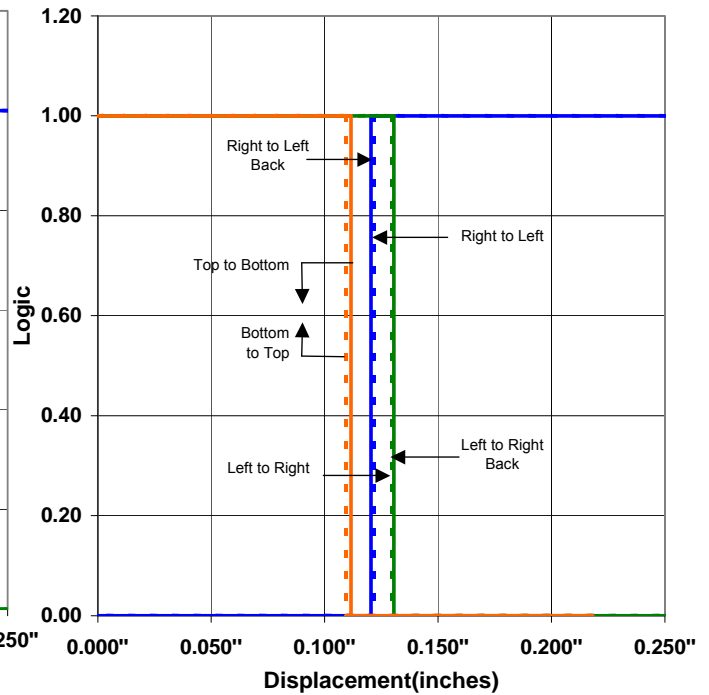

OPB665 - Flag in Middle of Slot

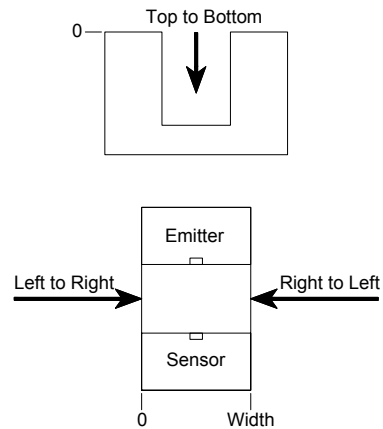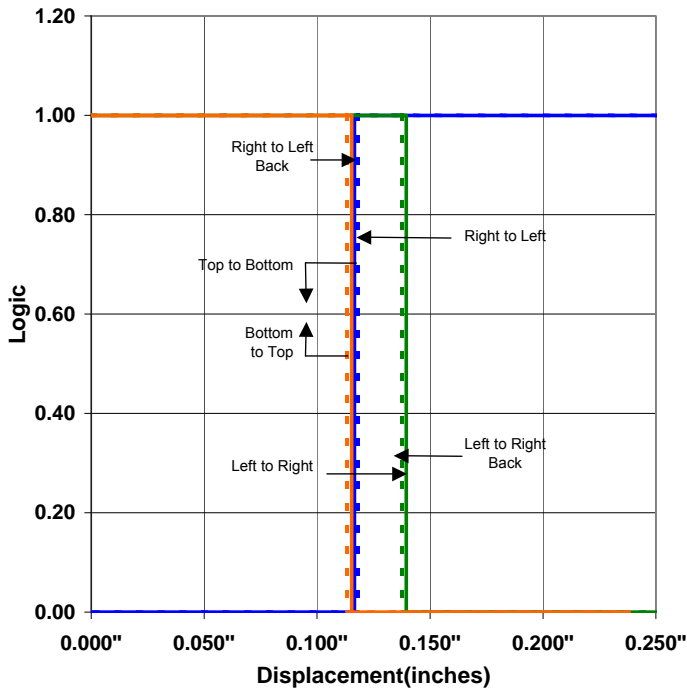

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optical Switches](#), [Transmissive](#), [Photo IC Output](#) *category:*

Click to view products by [TT Electronics](#) *manufacturer:*

Other Similar products are found below :

[EESX4009P1MID1](#) [EE-SMR3-1T](#) [GP1A51HRJ00F](#) [HOA6991-500](#) [EE-SX460-P1](#) [OPB960N11](#) [OPB120B](#) [OPB121B](#) [HOA0961-N51](#)
[HOA0963-T51](#) [HOA0973-N51](#) [HOA0973-T51](#) [HOA2006-001](#) [HOA2007-001](#) [HOA6961-T51](#) [HOA6971-T55](#) [HOA6972-T51](#) [HOA6981-](#)
[L55](#) [HOA6981-T51](#) [HOA6982-T51](#) [HOA6990-L51](#) [HOA6991-L51](#) [HOA6991-T51](#) [HOA6991-T55](#) [HOA6992-L51](#) [HOA6992-N55](#) [EE-](#)
[SA407-P2](#) [EE-SPX303-N](#) [EE-SX3009-P1](#) [EE-SX301](#) [EE-SX305](#) [EE-SX3070](#) [EE-SX3081](#) [EE-SX3088-W11](#) [EE-SX3096-W11](#) [EE-SX3160-](#)
[W11](#) [EE-SX3161-W11](#) [EE-SX3162-P1](#) [EE-SX3162-P1-Z](#) [EE-SX3163-P1](#) [EE-SX3163-P2](#) [EE-SX3164-P1](#) [EE-SX3239-P2](#) [EE-SX384](#) [EE-](#)
[SX398](#) [EE-SX4009-P1](#) [EE-SX4009-P10](#) [EE-SX4070](#) [EE-SX4081](#) [EE-SX4088](#)