




# Start Downlight G2

## Start Downlight G2


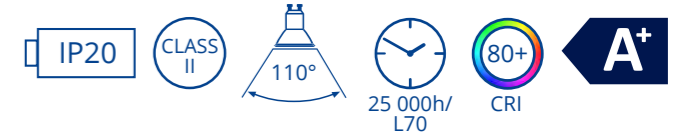


Tungsum introduces the range of Start Downlight Gen2. A selection of sizes and colour temperature options will meet customer requirements. The discrete pattern fits in every indoor environment while lightweight design allows quick and easy installation into new construction.




### Benefits

- Ultimate weight max 0.10 kg
- Colour temperatures: 4000 and 6500K
- Colour rendering index: CRI 80+
- IP20 ingress protection
- Available in more lumen versions up to 900 lm
- Simple recessed mounting in the ceiling
- Luminaire storage: -40°C to +60°C

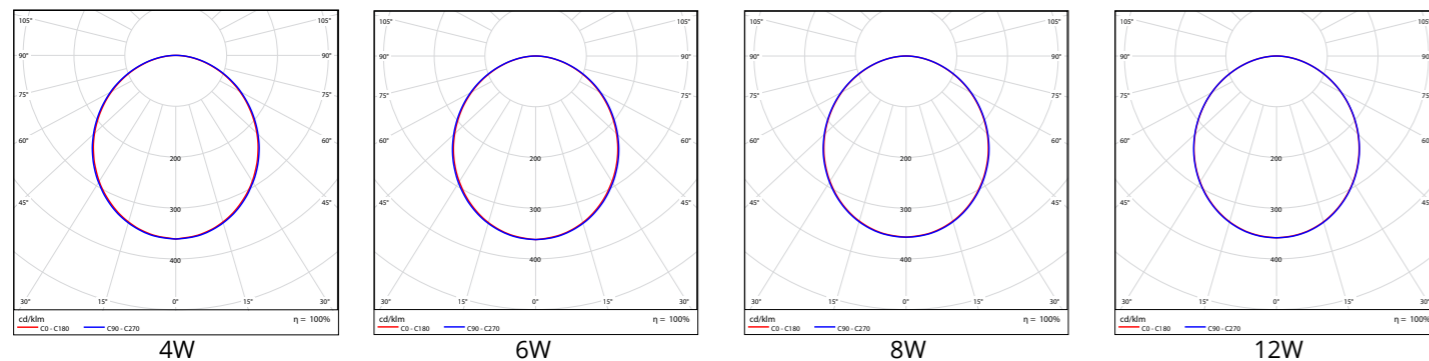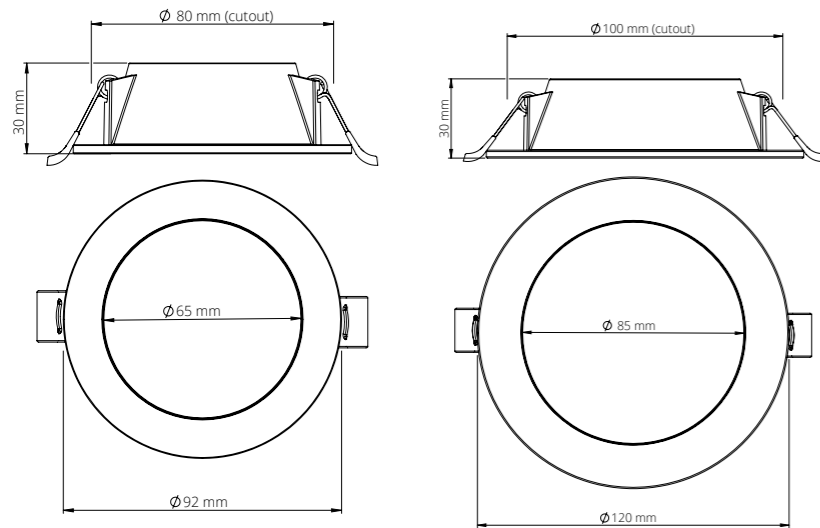

Product Description	Tungsum Product Code	Wattage (W)	Lumen (lm)	CCT (K)	System Efficiency (lm/W)	Dimensions (mm)	Weight (kg)	Pack Qty
<b>Start Downlight G2 - Static driver</b>								
LED Downlight Start TU G2 3" 4W 840	93110642	4	320	4000	80	Ø92x30	0.06	1
LED Downlight Start TU G2 3" 4W 865	93110627	4	320	6500	80	Ø92x30	0.06	1
LED Downlight Start TU G2 3" 6W 840	93110628	6	450	4000	75	Ø92x30	0.067	1
LED Downlight Start TU G2 3" 6W 865	93110629	6	450	6500	75	Ø92x30	0.067	1
LED Downlight Start TU G2 4" 8W 840	93110630	8	640	4000	80	Ø120x30	0.087	1
LED Downlight Start TU G2 4" 8W 865	93110631	8	640	6500	80	Ø120x30	0.087	1
LED Downlight Start TU G2 4" 12W 840	93110632	12	900	4000	75	Ø120x30	0.098	1
LED Downlight Start TU G2 4" 12W 865	93110633	12	900	6500	75	Ø120x30	0.098	1

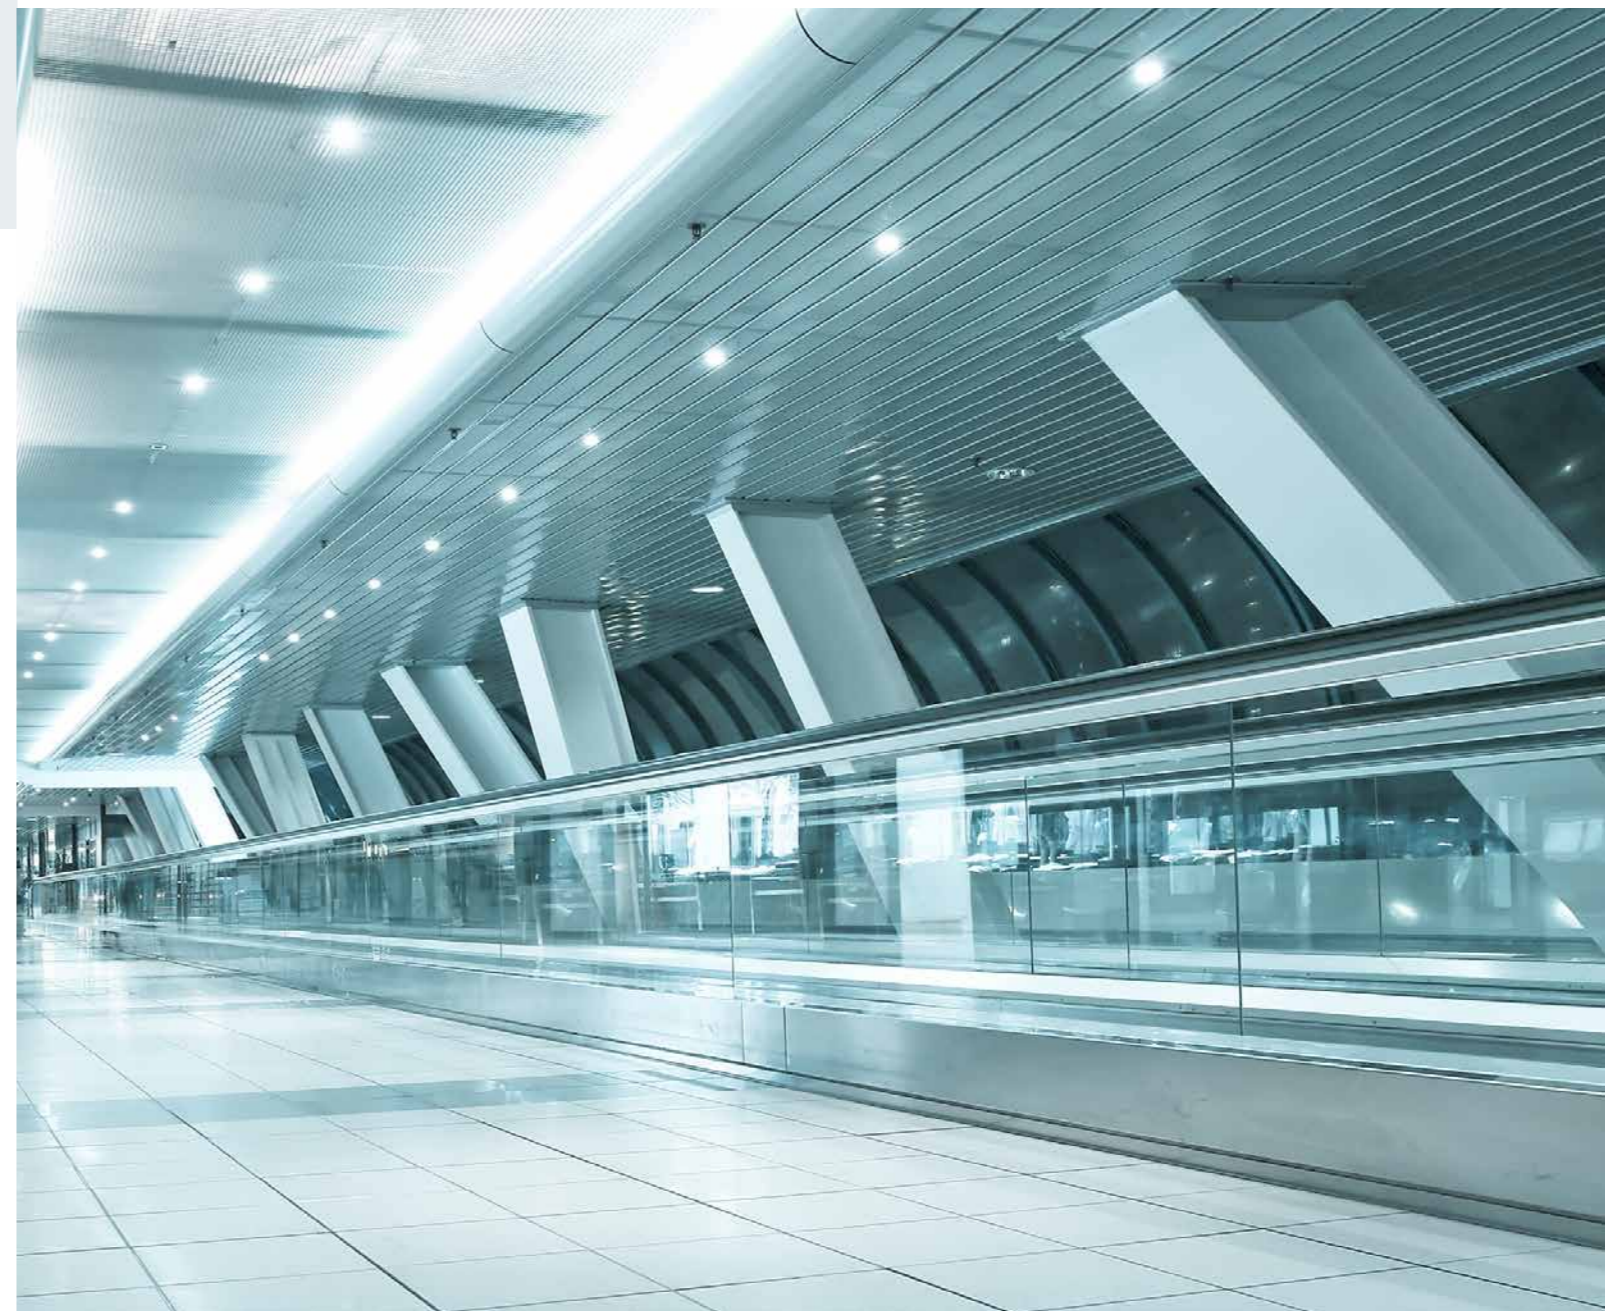

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Replacement Lamps - Based LEDs](#) category:*

*Click to view products by [TUNGSRAM](#) manufacturer:*

Other Similar products are found below :

[LAPD-1A](#) [LAPD-1R](#) [LAPD-2R](#) [LAPD-6W](#) [LSTD-M4S](#) [SSP-1156B153S12](#) [SSP-1157B156U12](#) [SSP-LXS110818BA](#) [560-0101F](#) [560-0103F](#)  
[LAPD-1W](#) [LAPD-6R](#) [560-0104F](#) [585-1113](#) [SSP-LXC1283S24](#) [SSP-3MB96U12G](#) [SLL-05EY](#) [1.90.690.684/0000](#) [560-0203F](#) [586-2206-205F](#) [SSP-LXS1826U16A](#) [LATD-2JW](#) [24LS4-G1](#) [24LS4-R1](#) [MF200-NFW5H](#) [MB403-W60-CW-BP](#) [1819LS2-G-CG](#) [387LP-R](#) [387LP-B](#)  
[387LP-W](#) [387LP-G](#) [6S6LS155-CWR](#) [130MBLS-G-CG](#) [5000404LAMP](#) [E10SB12A](#) [E10SB130A](#) [E10SB24A](#) [E10SG12A](#) [E10SG130A](#)  
[E10SR12A](#) [E10SR130A](#) [E10SW12A](#) [E10SY12A](#) [E10SY130A](#) [6S6LS130-CWW](#) [MF200-BCG12H](#) [MF200-NFR5H](#) [24L4-B1](#) [120PSBL-NWW](#) [MF200-NKG120](#)