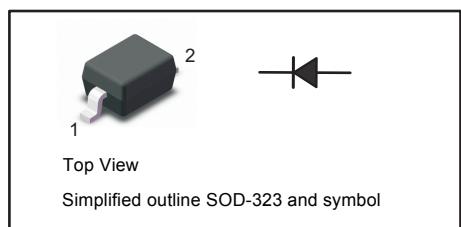


PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode


Features

- ◆ Fast switching speed
- ◆ Surface mount package ideally suited for automatic insertion

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage BAV19WS BAV20WS BAV21WS	V_{RRM}	120	V
		200	
		250	
Reverse Voltage BAV19WS BAV20WS BAV21WS	V_R	100	V
		150	
		200	
Average Rectified Forward Current	$I_{F(AV)}$	200	mA
Forward Continuous Current	I_{FM}	400	mA
Repetitive Peak Forward Current	I_{FRM}	625	mA
Non-Repetitive Peak Forward Surge Current at $t = 1 \mu\text{s}$ at $t = 1 \text{ s}$	I_{FSM}	2.5	A
		0.5	
Power Dissipation	P_{tot}	200	mW
Operating and Storage Temperature Range	T_j, T_{stg}	- 65 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 100 \mu\text{A}$ BAV19WS BAV20WS BAV21WS	$V_{(BR)R}$	120	-	V
		200	-	
		250	-	
Reverse Current at $V_R = 100 \text{ V}$ at $V_R = 150 \text{ V}$ at $V_R = 200 \text{ V}$ BAV19WS BAV20WS BAV21WS	I_R	-	100	nA
		-	100	
		-	100	
Forward Voltage at $I_F = 100 \text{ mA}$ at $I_F = 200 \text{ mA}$ BAV19WS BAV20WS BAV21WS	V_F	-	1	V
		-	1.25	
Total Capacitance at $V_R = 0, f = 1 \text{ MHz}$	C_T	-	5	pF
Reverse Recovery Time at $I_F = I_R = 30 \text{ mA}, I_{RR} = 0.1 \times I_R, R_L = 100 \Omega$	t_{rr}	-	50	ns

Typical Characteristics

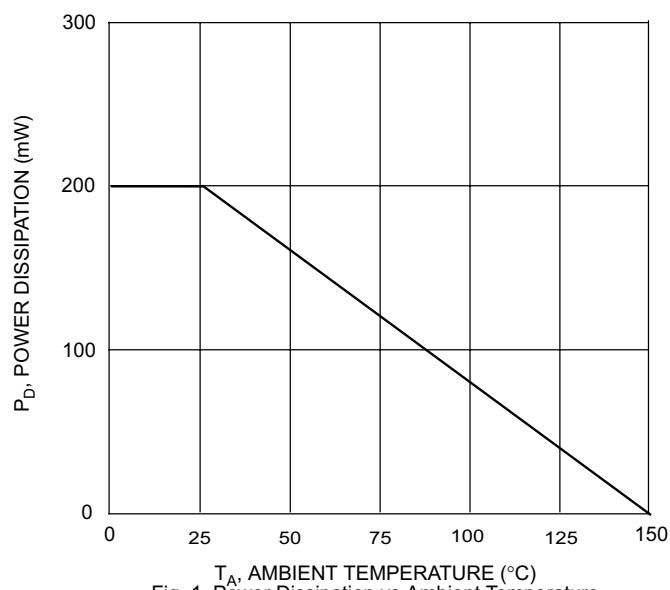


Fig. 1 Power Dissipation vs Ambient Temperature

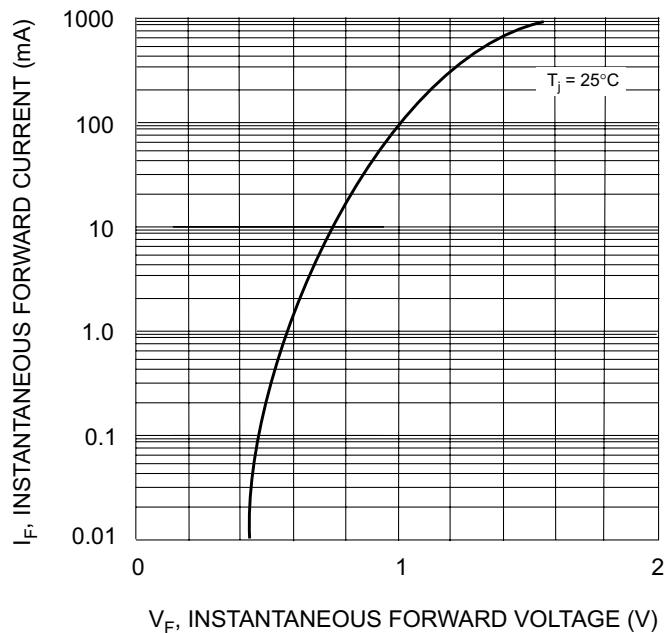


Fig. 2 Forward Characteristics


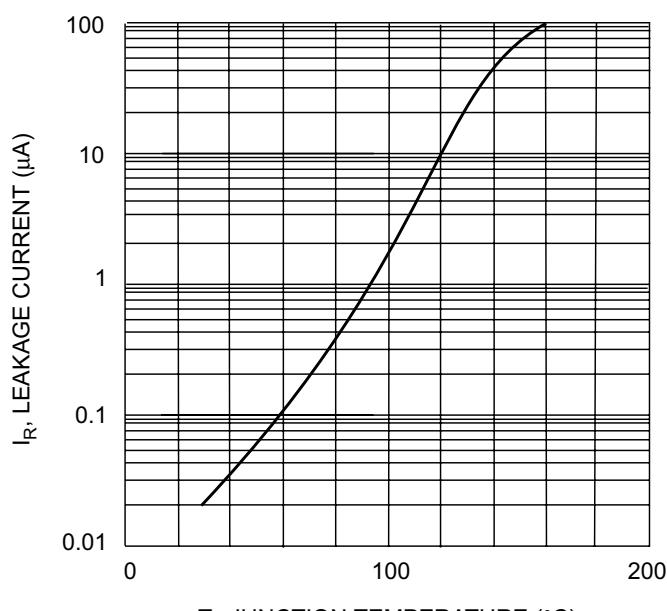


Fig. 3 Leakage Current vs Junction Temperature

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SOD-323

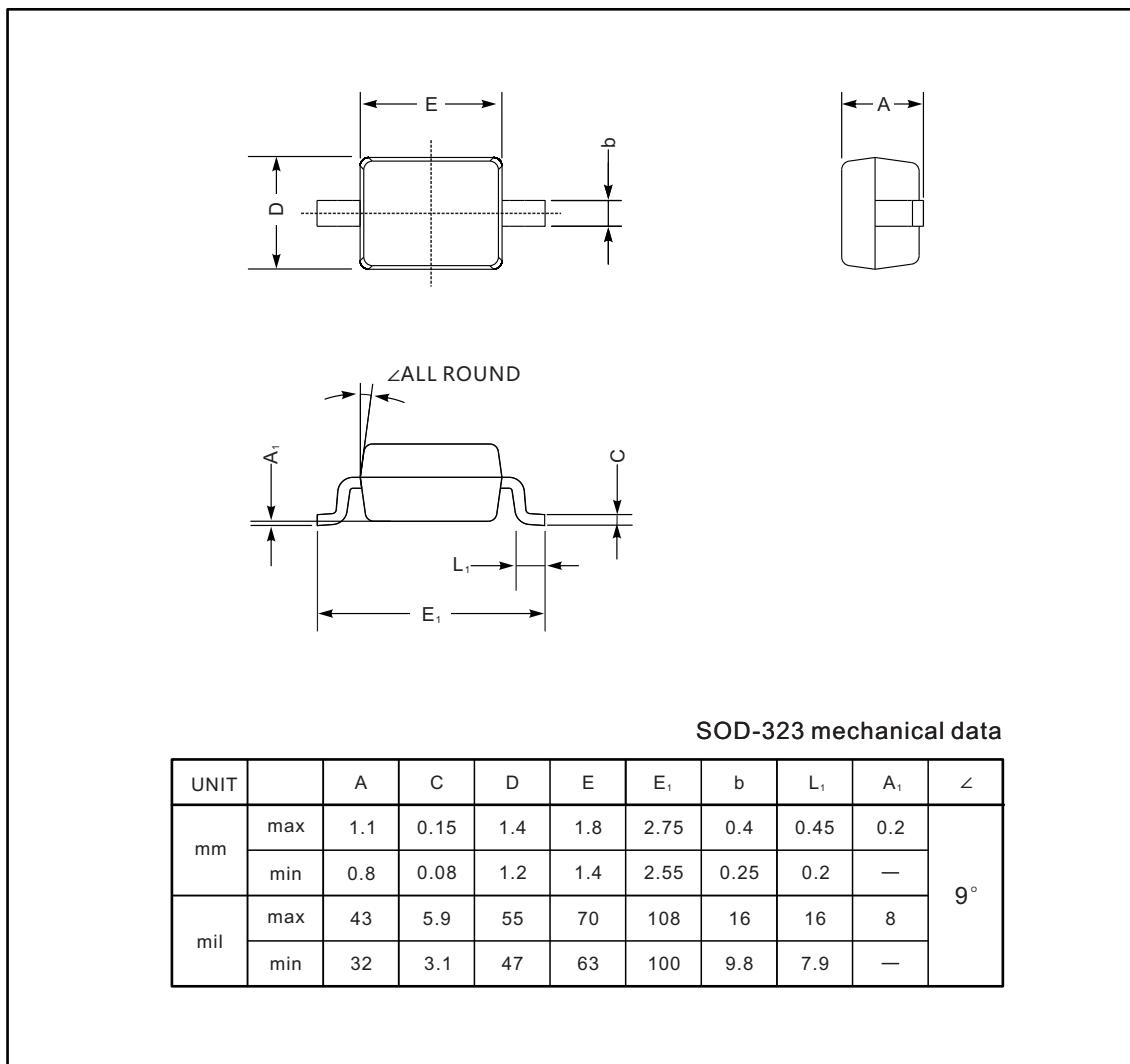

SOD-323 mechanical data

UNIT		A	C	D	E	E_1	b	L_1	A_1	\angle
mm	max	1.1	0.15	1.4	1.8	2.75	0.4	0.45	0.2	9°
	min	0.8	0.08	1.2	1.4	2.55	0.25	0.2	—	
mil	max	43	5.9	55	70	108	16	16	8	9°
	min	32	3.1	47	63	100	9.8	7.9	—	

The recommended mounting pad size

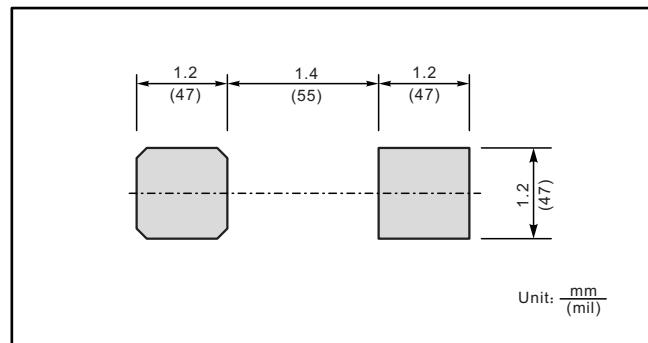

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by TWGMC manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC4731T-AY](#) [FJPF5304DTU](#)
[2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SB1324-TD-E](#) [2SC2412KT146S](#) [2SC3332T](#) [2SC3902S](#) [2SC5231C8-TL-E](#) [2SD1685F](#) [CPH6501-TL-E](#)
[MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#)
[UMX21NTR](#) [MCH6102-TL-E](#) [NJP0302DG](#) [TTA1452B,S4X\(S](#) [NTE13](#) [NTE26](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#)