
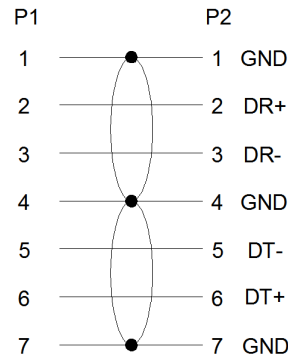


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/3/03	DFP
B	ECN 3206: UPDATE DWG FORMAT	2/29/08	D.GRIFFIN
C	ECN5761: UL STYLE WAS 2725. UPDATED PACKAGING NOTE & DWG FORMAT. UPDATED PICTORALLY.	10/11/11	DFP

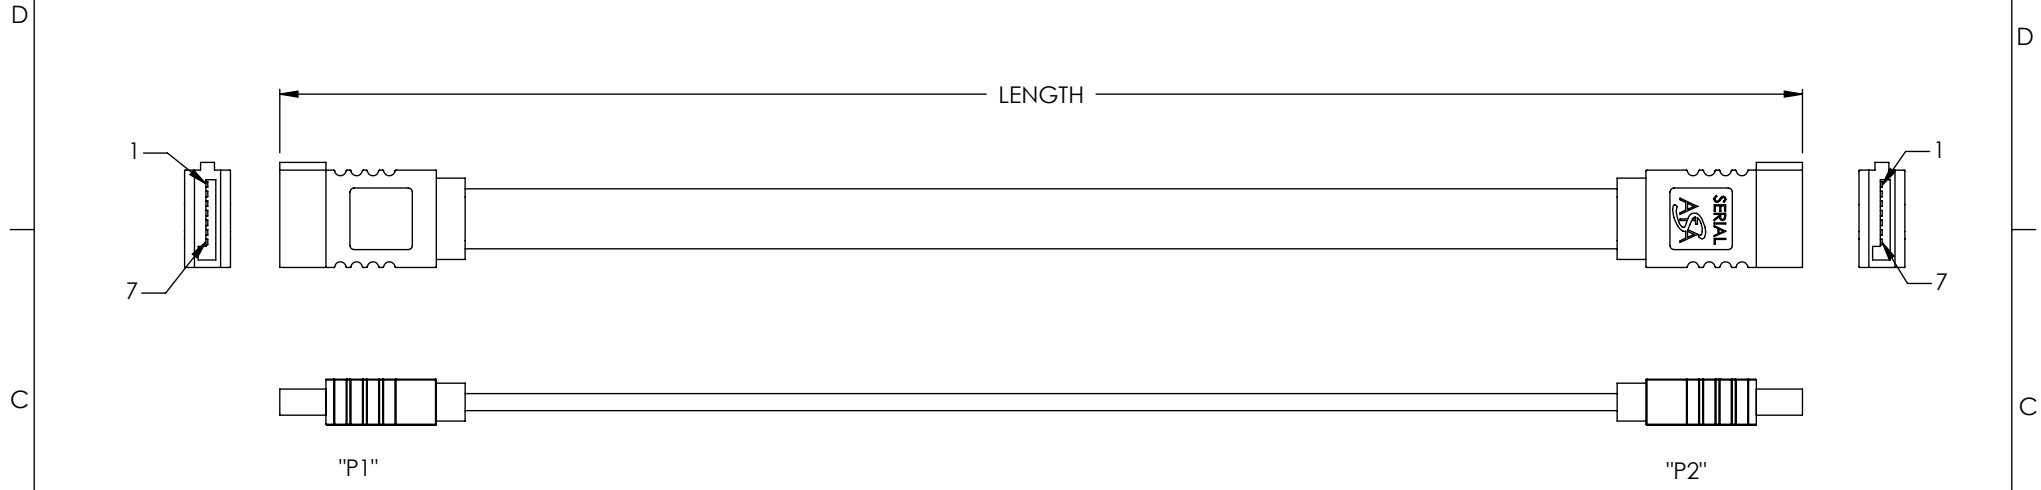

WIRING DIAGRAM

TABLE		
MODEL	METERS	FEET
CASATA-05M	0.5	1.64
CASATA-1M	1	3.28

NOTES:

CABLE:

FLAT CABLE, UL21149
 TWO 26 AWG PAIRS SHIELDED AND DRAIN WIRE
 INSULATOR MATERIAL: FM-PE
 COLOR: RED
 IMPEDANCE: 100 Ω ± 10

CONNECTOR:

INSULATOR: UL94V-0 RATED
 COLOR: BLACK
 CONTACTS: PHOSPHOR BRONZE
 PLATING: 15 μINCHES GOLD
 OVERMOLD: PVC
 COLOR: BLACK

PACKAGING:

INDIVIDUALLY PACKAGE IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031

NOTE:

- CABLE IS WIRED STRAIGHT THROUGH
- BOTH SHIELDS AND ALL DRAIN WIRES TIED TOGETHER.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	APPROVALS DRAWN BY D. PARHAM CHECKED BY T. CLARK APPROVED BY C. McCORMICK	DATE 04/02/2003 04/03/2003 04/03/2003	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY HETEROGENOUS		PRODUCT DESCRIPTION SERIAL ATA CABLE ASSEMBLY
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321 DWG. NO. CASATA SCALE: NONE CAD FILE: CASATA.SLDDRW	REV. C SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Cables / IEEE 1394 Cables](#) category:

Click to view products by [L-Com](#) manufacturer:

Other Similar products are found below :

[68768-0173](#) [FNY-W6003-01](#) [88764-0800](#) [13805532](#) [148700-1](#) [17-200621](#) [17-250051P](#) [954](#) [AC102012-2](#) [IP-USB1\(C10\)S-RW](#)
[CABLE/RTP/USB/DT](#) [10115240-12200LF](#) [RS232-GTD](#) [USBFTVX2SA2N03A](#) [USBFTV2SA2N03A](#) [1689404-1](#) [FTP-629Y401](#) [FTP-](#)
[628Y402](#) [943301-001](#) [FNY-W6022](#) [FNY-W6003-03](#) [1310-1015-05](#) [1310-1018-04](#) [1310-1019-04](#) [0887283402](#) [UA-30AMFM-SL7B02](#) [UA-](#)
[30AMFM-SL7B01](#) [UA-30AFM-LD7B03](#) [UA-30AMFM-SL7B03](#) [USBAPSCC7202A](#) [UES-1001A160](#) [UES-1003A160](#)
[USBFTVX7SA2N20A](#) [USBFTVX2SA2N20A](#) [USBFTV2PEMSA2N10A](#) [FTP-629Y602](#) [USBCAMCM100](#) [USB A/F*2 to 2.54 2*5P-SH](#)
[L=400mm](#) [EP-CBUSB10P2FLT](#) [1310-1033-01](#) [1310-1037-04](#) [ASR-USB](#) [68784-0075](#) [17-241361](#) [17-230471](#) [217B-BC02](#) [USB-29](#) [19800-](#)
[010500-200-RS](#) [USB+MINI DIN 6P WITH BKT](#) [088738-8100](#)