


**BC846/847/848/849/850 TRANSISTOR (NPN)**
**FEATURES**

- Low current (max. 100 mA)
- Low voltage (max. 65 V).

**APPLICATIONS**

- General purpose switching and amplification.

**SOT-23**


1. BASE
2. Emitter
3. COLLECTOR

**DESCRIPTION**

NPN transistor in a SOT23 plastic package.

PNP complements: BC856 /857/858/859/860.

**ABSOLUTE MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ )**

Parameter		Symbol	Value	Units
Collector Base Voltage	BC846	$V_{CBO}$	80	V
	BC847, BC850	$V_{CBO}$	50	V
	BC848, BC849	$V_{CBO}$	30	V
Collector Emitter Voltage	BC846	$V_{CEO}$	65	V
	BC847, BC850	$V_{CEO}$	45	V
	BC848, BC849	$V_{CEO}$	30	V
Emitter Base Voltage	BC846, BC847	$V_{EBO}$	6	V
	BC848, BC849, BC850	$V_{EBO}$	5	V
Collector Current		$I_C$	100	mA
Peak Collector Current		$I_{CM}$	200	mA
Power Dissipation		$P_{tot}$	300	mW
Thermal Resistance from Junction to Ambient Air		$R_{\theta JA}$	417	°C/W
Junction Temperature		$T_J$	150	°C
Storage Temperature Range		$T_S$	- 65 to + 150	°C







ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ C$ )

Parameter		Symbol	Min.	Typ.	Max.	Units
Collector-base breakdown voltage at $I_C = 10 \mu A$ , $I_E = 0$	BC846	$V_{(BR)CBO}$	80			
	BC847/850		50			
	BC848/849		30			
Collector-emitter breakdown voltage at $I_C = 10 mA$ , $I_B = 0$	BC846	$V_{(BR)CEO}$	65			
	BC847/850		45			
	BC848/849		30			
Emitter-base breakdown voltage at $I_E = 1 \mu A$ , $I_C = 0$	BC846/847	$V_{(BR)EBO}$	6			
	BC848-850		5			
DC Current Gain at $V_{CE} = 5 V$ , $I_C = 2 mA$	A	$h_{FE}$	110	-	220	-
	B	$h_{FE}$	200	-	450	-
	C	$h_{FE}$	420	-	800	-
Collector Emitter Saturation Voltage at $I_C = 10 mA$ , $I_B = 0.5 mA$ at $I_C = 100 mA$ , $I_B = 5 mA$		$V_{CEsat}$	-	-	250	mV
		$V_{CEsat}$	-	-	600	mV
Base-emitter saturation voltage at $I_C = 10 mA$ , $I_B = 0.5 mA$ at $I_C = 100 mA$ , $I_B = 5 mA$		$V_{BESat}$	-	700	850	mV
		$V_{BESat}$	-	900	1100	mV
Base Emitter On Voltage at $I_C = 2 mA$ , $V_{CE} = 5 V$ at $I_C = 10 mA$ , $V_{CE} = 5 V$		$V_{BE(on)}$	580	-	700	mV
		$V_{BE(on)}$	-	-	770	mV
Collector Cutoff Current at $V_{CB} = 30 V$		$I_{CBO}$	-	-	15	nA
Current Gain Bandwidth Product at $V_{CE} = 5 V$ , $I_C = 10 mA$ , $f = 100 MHz$		$f_T$	-	300	-	MHz
Output Capacitance at $V_{CB} = 10 V$ , $f = 1 MHz$		$C_{ob}$	-	-	6	pF
Input Capacitance at $V_{EB} = 0.5 V$ , $f = 1 MHz$		$C_{ib}$	-	9	-	pF
Noise Figure at $I_C = 200 \mu A$ , $V_{CE} = 5 V$ $R_G = 2 K\Omega$ , $f = 1 KHz$ at $I_C = 200 \mu A$ , $V_{CE} = 5 V$ , $R_G = 2 K\Omega$ , $f = 30 \sim 15 KHz$	BC846, BC847, BC848	NF	-	-	10	dB
	BC849, BC850	NF	-	-	4	dB
	BC849	NF	-	-	4	dB
	BC850	NF	-	-	3	dB

## MARKING CODE

TYPE	846A	846B	846C	847A	847B	847C	848A	848B	848C	849A	849B	849C	850A	850B	850C
MARK	1A	1B	1C	1E	1F	1G	1J	1K	1L	2A	2B	2C	2E	2F	2G


## Typical Characteristics

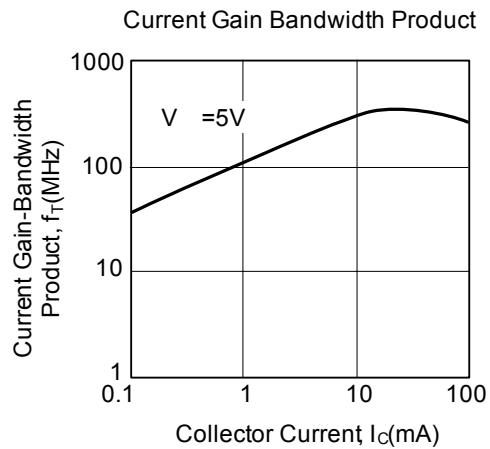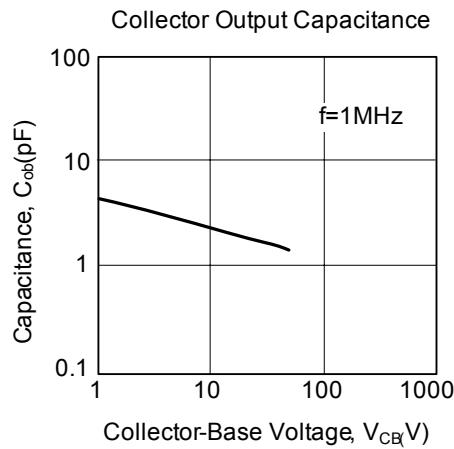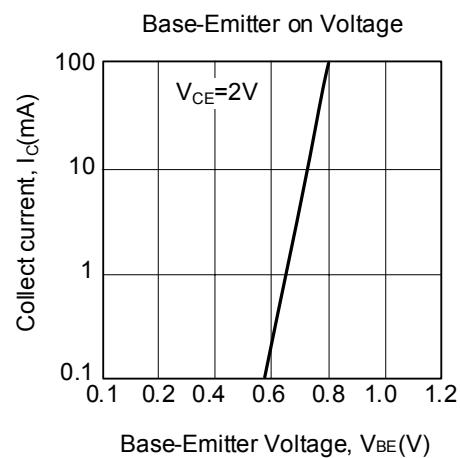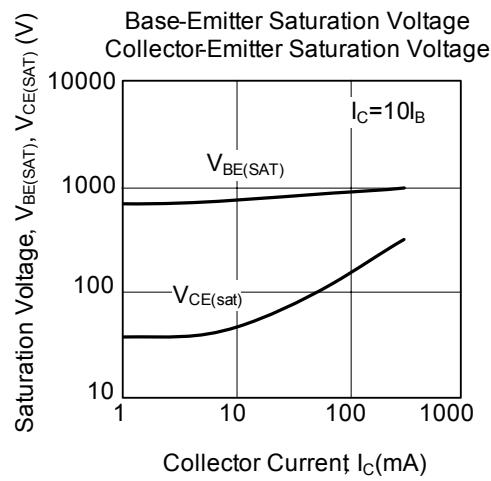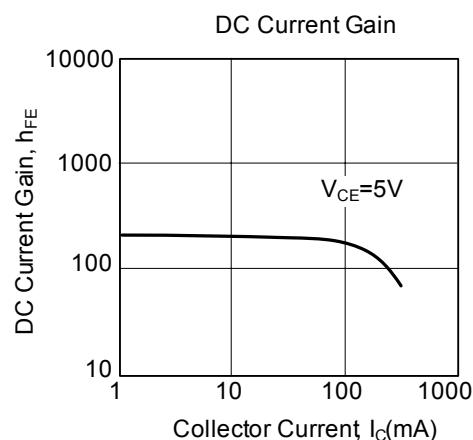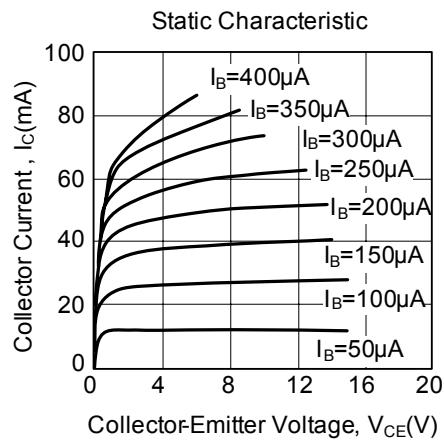

## PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

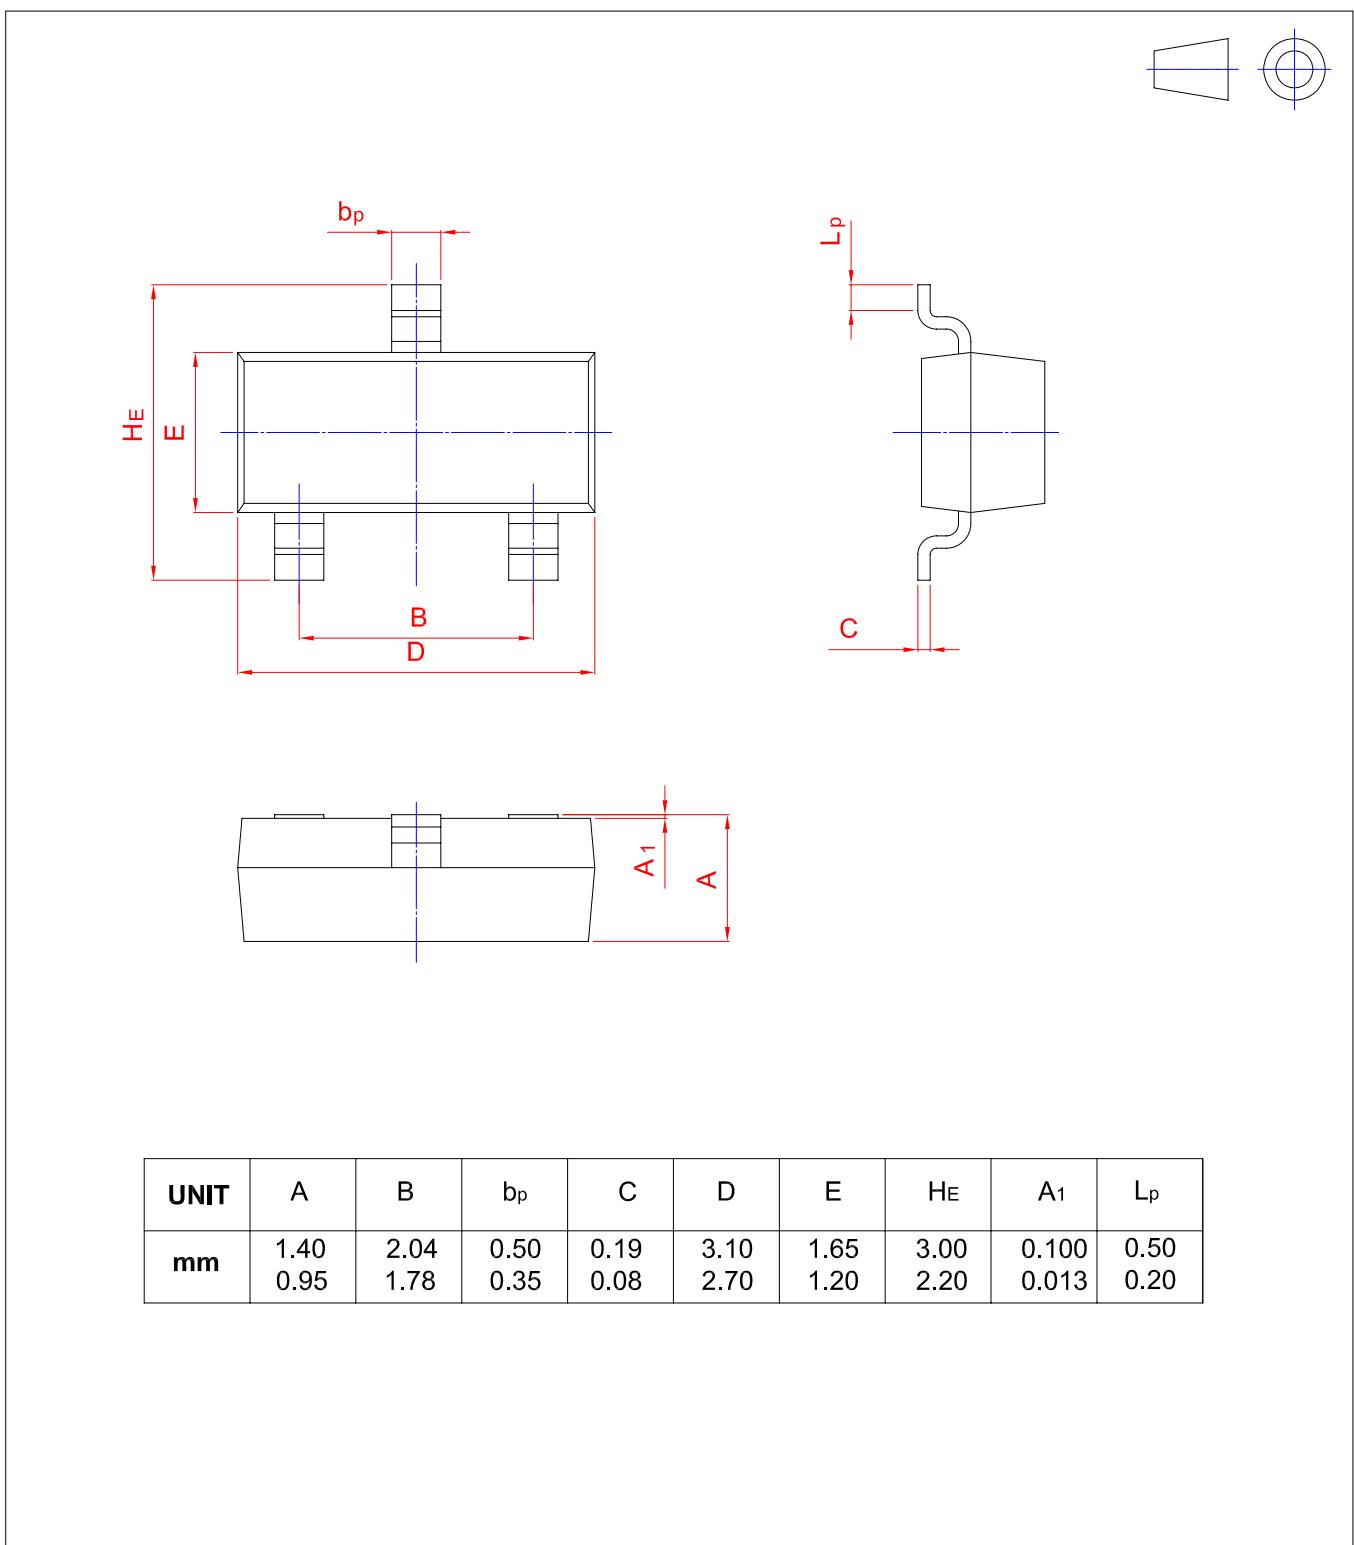

UNIT	A	B	$b_p$	C	D	E	$H_E$	$A_1$	$L_p$
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by TWGMC manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T\)](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)  
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)