



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE270 (NPN) & NTE271 (PNP) Silicon Complementary Transistors Darlington Power Amp, Switch TO-3PN Type Package

Description:

The NTE270 (NPN) and NTE271 (PNP) are silicon Darlington complementary power transistors in a TO-3PN type package designed for general purpose amplifier and low frequency switching applications.

Features:

- High DC Current Gain: $h_{FE} = 1000$ Min @ $I_C = 5A, V_{CE} = 4V$
- Collector-Emitter Sustaining Voltage: $V_{CEO(sus)} = 100V$ Min @ 30mA
- Monolithic Construction with Built-In Base-Emitter Shunt Resistor

Absolute Maximum Ratings:

Collector-Emitter Voltage, V_{CEO}	100V
Collector-Base Voltage, V_{CB}	100V
Emitter-Base Voltage, V_{EB}	5V
Collector Current, I_C	
Continuous	10A
Peak (Note 1)	15A
Continuous Base Current, I_B	500mA
Total Device Dissipation ($T_C = +25^\circ C$), P_D	125W
Operating Junction Temperature Range, T_J	-65° to $+150^\circ C$
Storage Temperature Range, T_{stg}	-65° to $+150^\circ C$
Thermal Resistance, Junction-to-Case, R_{thJC}	$1.0^\circ C/W$
Thermal Resistance, Junction-to-Ambient, R_{thJA}	$35.7^\circ C/W$

Note 1. Pulse Width = 5ms, Duty Cycle $\leq 10\%$.

Electrical Characteristics: ($T_C = +25^\circ C$ unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF Characteristics						
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C = 30mA, I_B = 0, \text{Note 2}$	100	-	-	V
Collector Cutoff Current	I_{CEO}	$V_{CE} = 50V, I_B = 0$	-	-	2.0	mA
	I_{CBO}	$V_{CB} = 100V, I_E = 0$	-	-	1.0	mA
Emitter Cutoff Current	I_{EBO}	$V_{BE} = 5V$	-	-	2.0	mA

Note 2. Pulse Test: Pulse Width = 300 μ s, Duty Cycle $\leq 2\%$.

Electrical Characteristics (Cont'd): ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
ON Characteristics (Note 2)						
DC Current Gain	h_{FE}	$I_C = 5\text{A}, V_{CE} = 4\text{V}$	1000	-	-	
		$I_C = 10\text{A}, V_{CE} = 4\text{V}$	500	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 5\text{A}, I_B = 10\text{mA}$	-	-	2.0	V
		$I_C = 10\text{A}, I_B = 40\text{mA}$	-	-	3.0	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 10\text{A}, I_B = 40\text{mA}$	-	-	3.5	V
Switching Characteristics (Resistive Load)						
Delay Time	t_d	$V_{CC} = 30\text{V}, I_C = 5\text{A},$ $I_B = 20\text{mA}, \text{Duty Cycle} \leq 2\%,$ $I_{B1} = I_{B2}, R_C \text{ \& } R_B \text{ Varied},$ $T_J = +25^\circ\text{C}$	-	0.15	-	μs
Rise Time	t_r		-	0.55	-	μs
Storage Time	t_s		-	2.5	-	μs
Fall Time	t_f		-	2.5	-	μs

Note 2. Pulse Test: Pulse Width = $300\mu\text{s}$, Duty Cycle $\leq 2\%$.

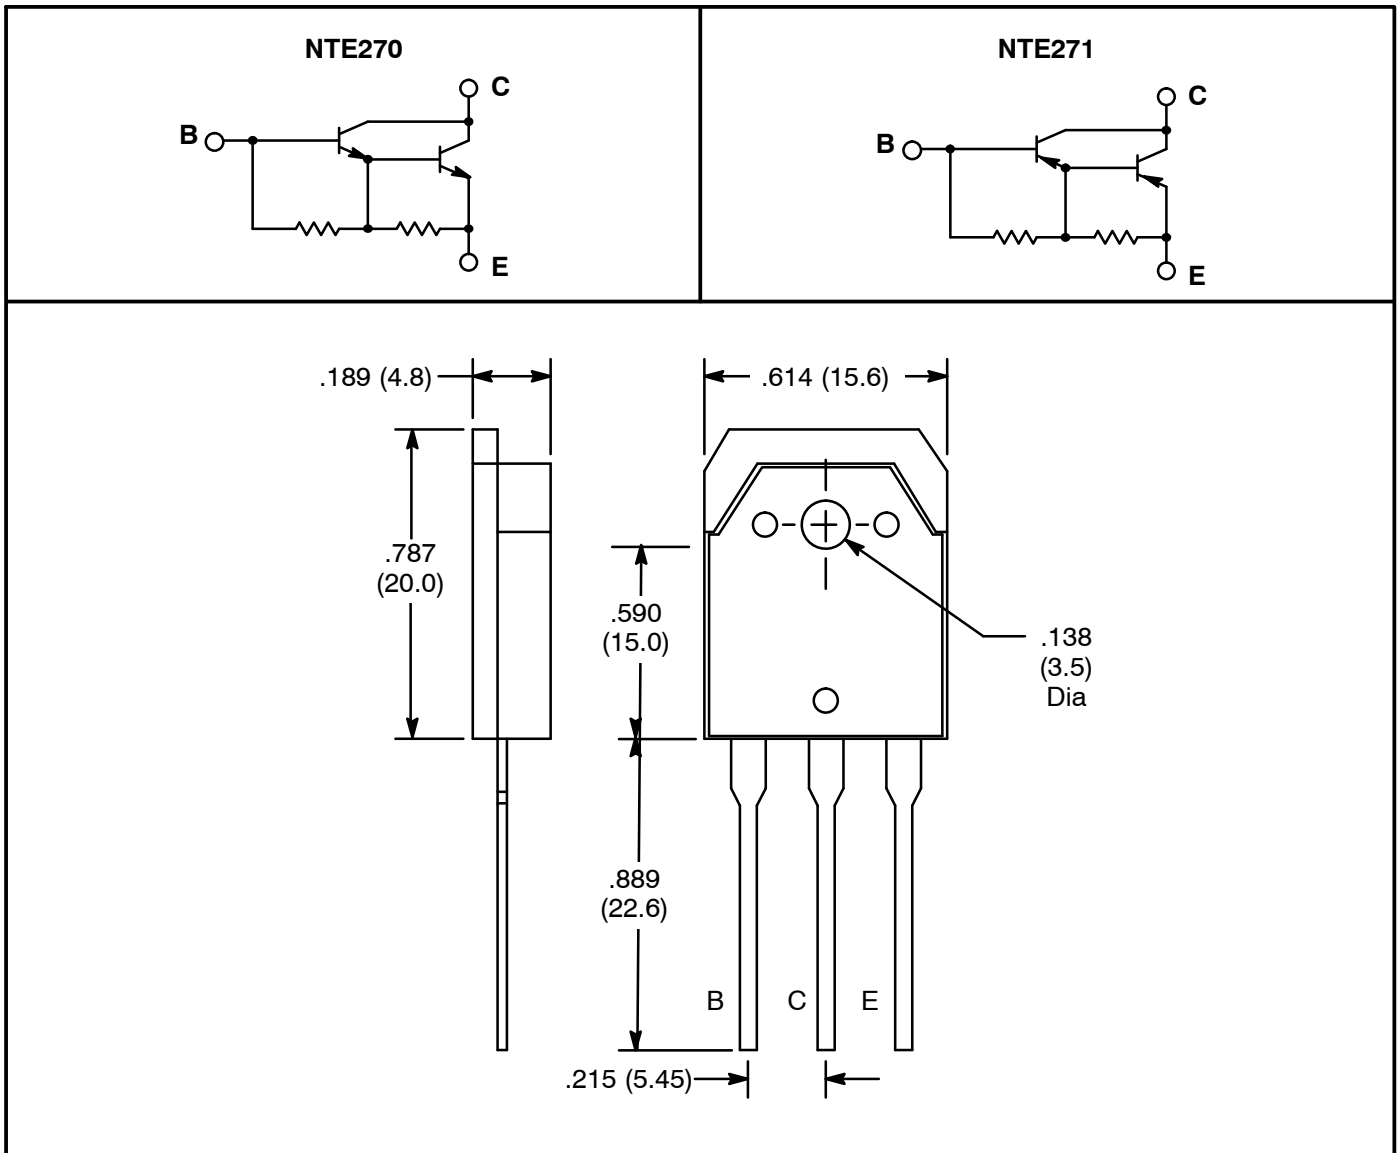

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Darlington Transistors](#) category:

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[281287X](#) [SMMBT6427LT1G](#) [2N7371](#) [BDV64B](#) [JANTXV2N6287](#) [028710A](#) [SMMBTA64LT1G](#) [2N6350](#) [2SB1214-TL-E](#)
[SMMBTA14LT1G](#) [SBSP52T1G](#) [NJVMJD117T4G](#) [Jantx2N6058](#) [2N6353](#) [LB1205-L-E](#) [500-00005](#) [2N6053](#) [NJVMJD112G](#) [Jan2N6350](#)
[Jantx2N6352](#) [Jantx2N6350](#) [BULN2803LVS](#) [ULN2001N](#) [2SB1383](#) [2SB1560](#) [2SB852KT146B](#) [TIP112TU](#) [TIP122TU](#) [BCV27](#) [MMBTA13-](#)
[TP](#) [MMBTA14-TP](#) [MMSTA28T146](#) [BSP50H6327XTSA1](#) [KSH122TF](#) [NTE2557](#) [NJVNJD35N04T4G](#) [TIP115](#) [MPSA29-D26Z](#) [MJD127T4](#)
[FJB102TM](#) [BCV26E6327HTSA1](#) [BCV46E6327HTSA1](#) [BCV47E6327HTSA1](#) [BSP61H6327XTSA1](#) [BU941ZPFI](#) [2SB1316TL](#) [2SD1980TL](#)
[NTE2350](#) [NTE245](#) [NTE246](#)