



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinc.com>

NTE5539 & NTE5540 Silicon Controlled Rectifier (SCR) 55 Amps, TO218

Features:

- High Voltage Capability
- High Surge Capability
- Glass Passivated Chip

Electrical Characteristics: ($T_A = +25^\circ\text{C}$, 60Hz, Resistive load unless otherwise specified)

Repetitive Peak Off-State Forward & Reverse Voltage, V_{DRM} , V_{RRM}

NTE5539 400V

NTE5540 800V

Maximum RMS On-State Current, $I_T(\text{RMS})$ 55A

Average On-State Current, $I_T(\text{AV})$ 35A

DC Gate Trigger Current ($V_D = 12\text{V}$, $R_L = 30\Omega$), I_{GT}

Minimum 5mA

Maximum 40mA

Maximum Peak Off-State Forward & Reverse Current (At rated V_{DRM} , V_{RRM}), I_{DRM} , I_{RRM}

($T_C = +25^\circ\text{C}$)

NTE5539 10 μA

NTE5540 20 μA

($T_C = +100^\circ\text{C}$)

NTE5539 1.0mA

NTE5540 1.5mA

($T_C = +125^\circ\text{C}$)

NTE5539 2.0mA

NTE5540 3.0mA

Peak On-State Voltage ($I_T(\text{RMS}) = 55\text{A}$, $T_C = +25^\circ\text{C}$), V_{TM} 1.8V

Maximum DC Gate Trigger Voltage ($T_C = +25^\circ\text{C}$, $V_D = 12\text{V}$, $R_L = 30\Omega$), V_{GT} 1.5V

Minimum DC Gate Trigger Voltage ($T_C = +125^\circ\text{C}$, $V_D = 12\text{V}$, $R_L = 30\Omega$), V_{GT} 0.2V

Maximum DC Holding Current (Gate Open, Initial On-State Current = 400mA(DC)), I_H 60mA

Peak Gate Current (Pulse Width $\leq 10\mu\text{s}$), I_{GM} 4A

Peak Gate Power Dissipation (Pulse Width $\leq 10\mu\text{s}$), P_{GM} 40W

Average Gate Power Dissipation, $P_{\text{G(AV)}}$ 800mW

Peak One Cycle Surge Forward Current, I_{TSM}

50Hz 550A

60Hz 650A

Minimum Critical Rate-of-Applied Forward Voltage, dv/dt

($T_C = +100^\circ\text{C}$)

NTE5539 650V/ μs

NTE5540 500V/ μs


($T_C = +125^\circ\text{C}$)

NTE5539 550V/ μs

NTE5540 475V/ μs

Electrical Characteristics (Cont'd):	($T_A = +25^\circ\text{C}$, 60Hz, Resistive load unless otherwise specified)
RMS Surge (Non-Repetitive) On-State Current for Fusing (8.3ms), I^2t	1750A ² sec
Maximum Rate-of-Change of On-State Current ($I_{GT} = 150\text{mA}$, $t_r = 0.1\mu\text{s}$), di/dt	175A/ μs
Gate Controlled Turn-On Time (Gate Pulse = 150mA, Min Width = 15 μs , $t_r \leq 0.1\mu\text{s}$), t_{gt}	2.5 μs
Circuit Commutated Turn-Off Time (Note 1), t_q	35 μs
Operating Temperature Range, T_J	-40° to +125°C
Storage Temperature Range, T_{stg}	-40° to +125°C
Lead Temperature (During Soldering, 1/16" from case, 10sec max), T_L	+230°C

Note 1. $i_T = 2\text{A}$, Pulse Duration = 50 μs , $dv/dt = 20\text{V}/\mu\text{s}$, $di/dt = -30\text{A}/\mu\text{s}$, $I_{GT} = 200\text{mA}$ at Turn-On

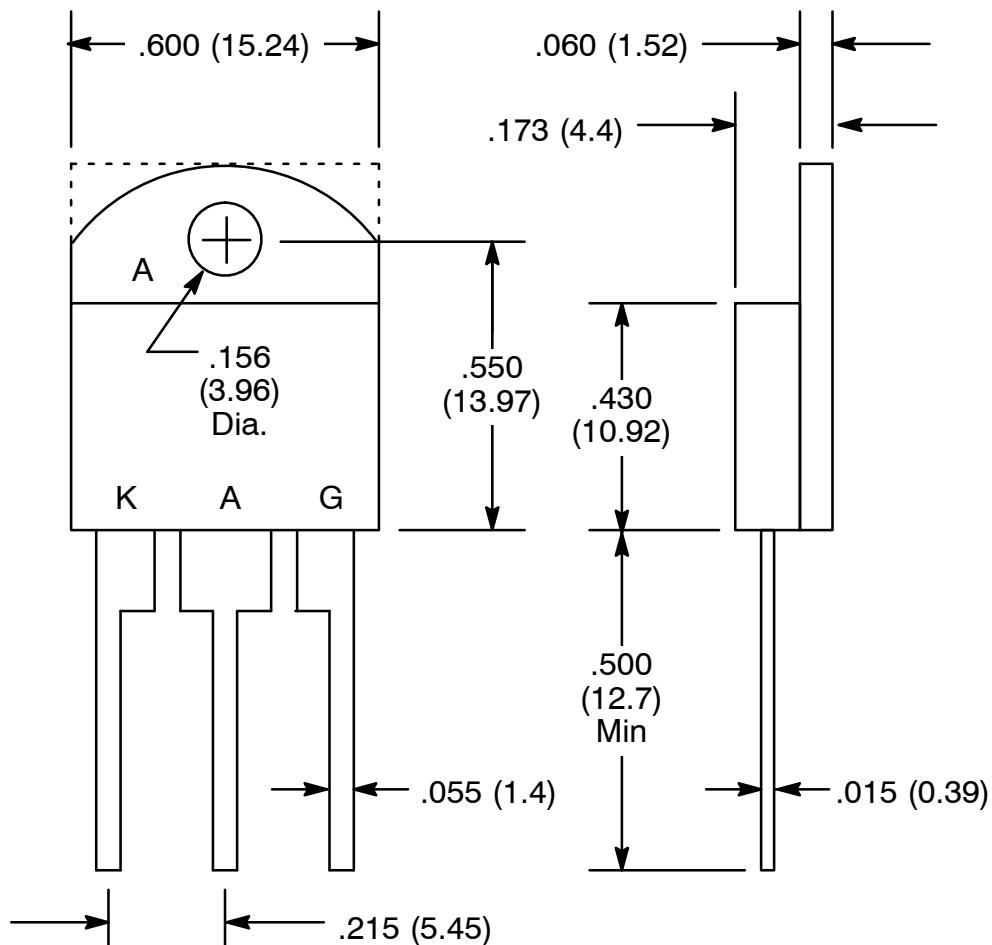

NOTE: Dotted line indicates that case may have square corners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SCRs](#) category:

Click to view products by [NTE manufacturer:](#)

Other Similar products are found below :

[NTE5428](#) [NTE5448](#) [NTE5457](#) [NTE5511](#) [T1500N16TOF VT](#) [T720N18TOF](#) [T880N14TOF](#) [T880N16TOF](#) [TS110-7UF](#) [TT104N12KOF-A](#) [TT104N12KOF-K](#) [TT162N16KOF-A](#) [TT162N16KOF-K](#) [TT330N16AOF](#) [VS-16RIA100](#) [VS-22RIA20](#) [VS-2N5206](#) [VS-2N685](#) [VS-40TPS08A-M3](#) [VS-ST230S12P1VPBF](#) [057219R](#) [CLB30I1200HB](#) [T1190N16TOF VT](#) [T1220N22TOF VT](#) [T201N70TOH](#) [T830N18TOF](#) [TD92N16KOF-A](#) [TT250N12KOF-K](#) [VS-2N692](#) [VS-2N689](#) [VS-25RIA40](#) [VS-16RIA120](#) [VS-10RIA120](#) [VS-30TPS08PBF](#) [NTE5427](#) [NTE5442](#) [VS-2N690](#) [VS-ST300S20P0PBF](#) [TT251N16KOF-K](#) [VS-22RIA100](#) [VS-16RIA40](#) [CR02AM-8#F00](#) [VS-ST110S12P0VPBF](#) [TD250N16KOF-A](#) [VS-ST110S16P0](#) [VS-10RIA10](#) [VS-16TTS08-M3](#) [TS110-7A1-AP](#) [T930N36TOF VT](#) [T2160N24TOF VT](#)