

AF116 ... AF146 3-pole contactors

55 to 75 kW

AC / DC operated



AF146-30-11

1SFC101007V0001



AF146-30-11B

1SFC101008V0001



CAL19-11

1SFC101071V0001



LT140-30L

1SFC101038V0001

Description

AF116 ... AF146 contactors are mainly used for controlling 3-phase motors and power circuits.

Ordering details

3-pole contactors for connection with built-in cable clamps

IEC Rated operational power 400 V AC-3 kW	UL/CSA 3-phase motor rating 480 V General use rating 600 V AC A	Rated control circuit voltage Uc V 50/60 Hz: V DC	Auxiliary contacts fitted 1 1	Type	Order code	Weight Pkg (1 pce) kg		
							Rated operational current $\theta \leq 40^\circ\text{C}$ 690 V AC-1 A	3-phase motor rating 480 V hp
55	160	75	160	1 1	AF116-30-11-11	1SFL427001R1111	1.750	
						AF116-30-11-12	1SFL427001R1211	1.750
						AF116-30-11-13	1SFL427001R1311	1.750
						AF116-30-11-14 ¹⁾	1SFL427001R1411	1.750
75	200	100	200	1 1	AF140-30-11-11	1SFL447001R1111	1.750	
						AF140-30-11-12	1SFL447001R1211	1.750
						AF140-30-11-13	1SFL447001R1311	1.750
						AF140-30-11-14 ¹⁾	1SFL447001R1411	1.750
75	225	100	200	1 1	AF146-30-11-11	1SFL467001R1111	1.750	
						AF146-30-11-12	1SFL467001R1211	1.750
						AF146-30-11-13	1SFL467001R1311	1.750
						AF146-30-11-14 ¹⁾	1SFL467001R1411	1.750

3-pole contactors with bar connections

IEC Rated operational power 400 V AC-3 kW	UL/CSA 3-phase motor rating 480 V General use rating 600 V AC A	Rated control circuit voltage Uc V 50/60 Hz: V DC	Auxiliary contacts fitted 1 1	Type	Order code	Weight Pkg (1 pce) kg		
							Rated operational current $\theta \leq 40^\circ\text{C}$ 690 V AC-1 A	3-phase motor rating 480 V hp
55	160	75	160	1 1	AF116-30-11B-11	1SFL427002R1111	1.500	
						AF116-30-11B-12	1SFL427002R1211	1.500
						AF116-30-11B-13	1SFL427002R1311	1.500
						AF116-30-11B-14 ¹⁾	1SFL427002R1411	1.500
75	200	100	200	1 1	AF140-30-11B-11	1SFL447002R1111	1.500	
						AF140-30-11B-12	1SFL447002R1211	1.500
						AF140-30-11B-13	1SFL447002R1311	1.500
						AF140-30-11B-14 ¹⁾	1SFL447002R1411	1.500
75	225	100	200	1 1	AF146-30-11B-11	1SFL467002R1111	1.500	
						AF146-30-11B-12	1SFL467002R1211	1.500
						AF146-30-11B-13	1SFL467002R1311	1.500
						AF146-30-11B-14 ¹⁾	1SFL467002R1411	1.500

1) Coil 250...500 V, 50/60 Hz and DC available in April 2013

Note: AF contactors type -00 and -22 on request.

Auxiliary contact blocks

	Auxiliary contacts 1 1	Type	Order code	Pkg qty	Weight (1 pce) kg
Side mounted instantaneous contact blocks	1 1	CAL19-11	1SFN010820R1011	2	0.040
Side mounted instantaneous contact blocks mounting outside other block	1 1	CAL19-11B	1SFN010820R3311	2	0.040

Terminal shrouds

	Type	Order code	Pkg qty	Weight (1 pce) kg
For connection with compression lugs	LT140-30L	1SFN124203R1000	2	0.070

Overload relays for AF116 ... AF146 3-pole contactors



EF146



TF140DU

Description

Ordering details Electronic overload relays

Setting range	Short-circuit protective device	Trip class	Type	Order code	Weight (1 pce) kg
A					
54...150	315 A, Fuse type gG	E10, E20, E30	EF146	1SAX351001R1101	0.890



Ordering details Thermal overload relays

Setting range	Short-circuit protective device	Trip class	Type	Order code	Weight (1 pce) kg
A					
66...90	125 A, Fuse type gG	10 A	TF140DU-90	1SAZ431201R1001	0.880
80...110	160 A, Fuse type gG	10 A	TF140DU-110	1SAZ431201R1002	0.820
100...135	200 A, Fuse type gG	10 A	TF140DU-135	1SAZ431201R1003	0.820
110...142	200 A, Fuse type gG	10 A	TF140DU-142	1SAZ431201R1004	0.820

AF116 ... AF146 3-pole contactors

Technical data

Main pole - Utilization characteristics according to IEC

Contactor types	AC / DC operated	AF116	AF140	AF146
Standards		IEC 60947-4-1 and EN 60947-4-1		
Rated operational voltage U _e max.		690 V	690 V	1000 V
Rated frequency (without derating)		50 / 60 Hz		
AC-1 Utilization category				
For air temperature close to contactor				
I_e / Rated operational current AC-1	θ ≤ 40 °C	160 A	200 A	225 A
U _e max. ≤ 690 V, 50/60 Hz	θ ≤ 60 °C	145 A	175 A	200 A
	θ ≤ 70 °C	130 A	160 A	175 A
With conductor cross-sectional area		70 mm ²	70 mm ²	95 mm ²
AC-3 Utilization category				
For air temperature close to contactor θ ≤ 55 °C				
I_e / Max. rated operational current AC-3				
 3-phase motors	220-230-240 V	116 A	140 A	146 A
	380-400 V	116 A	140 A	146 A
	415 V	116 A	140 A	146 A
	440 V	116 A	140 A	146 A
	500 V	110 A	130 A	130 A
	690 V	65 A	80 A	93 A
	1000 V	–	–	60 A
	Rated operational power AC-3			
 1500 r.p.m. 50 Hz 1800 r.p.m. 60 Hz 3-phase motors	220-230-240 V	30 kW	37 kW	45 kW
	380-400 V	55 kW	75 kW	75 kW
	415 V	55 kW	75 kW	75 kW
	440 V	75 kW	90 kW	90 kW
	500 V	75 kW	90 kW	90 kW
	690 V	55 kW	75 kW	90 kW
	1000 V	–	–	75 kW
	Short-circuit protection device for contactors			
without thermal overload relay - Motor protection excluded				
U _e ≤ 500 V AC - gG type fuse		200 A	315 A	315 A
Max. electrical switching frequency	AC-1	300 cycles/h		
	AC-3	300 cycles/h		
Connection capacity (min. ... max.)				
Main conductors (poles)				
Stranded	1 or 2 x	10 ... 95 mm ²		
Flexible	1 or 2 x	10 ... 70 mm ²		


Main pole - Utilization characteristics according to UL / CSA

Contactor types	AC / DC operated	AF116	AF140	AF146
Standards		UL 60947-4-1A and CSA C22.2 N° 60947-4-1-07		
Max. operational voltage		600 V		
UL / CSA General use rating				
600 VAC		160 A	200 A	200 A
With conductor cross-sectional area		AWG 2/0	AWG 3/0	AWG 3/0
UL / CSA maximum 3-phase motor rating				
Full load current	220-208 V AC	88 A	114 A	114 A
	220-240 V AC	104 A	130 A	130 A
	440-480 V AC	96 A	124 A	124 A
	550-600 V AC	99 A	125 A	125 A
	Horse power rating	220-208 V AC	30 hp	40 hp
220-240 V AC		40 hp	50 hp	50 hp
440-480 V AC		75 hp	100 hp	100 hp
550-600 V AC		100 hp	125 hp	125 hp
Short-circuit protection device for contactors				
without thermal overload relay - Motor protection excluded				
Fuse rating		250 A	250 A	250 A
Fuse type, 600 V		J/R		
Connection capacity acc to UL/CSA	1 or 2 x	AWG 6 ...3/0		

AF116 ... AF146 3-pole contactors


Dimension drawings

Main dimensions mm, inches

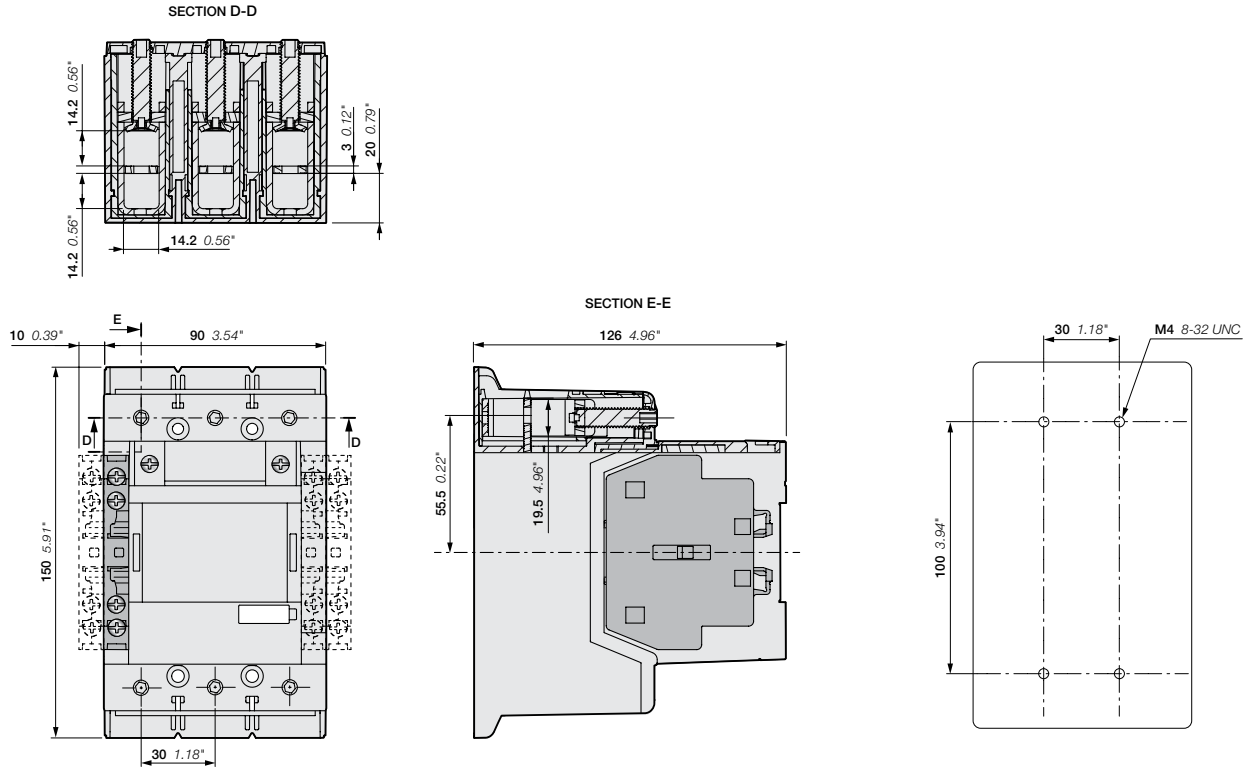

AF116, AF140, AF146-30-00 + CAL19 2-pole auxiliary contact block
AF116, AF140, AF146-30-11

AF116, AF140, AF146-30-...(B)

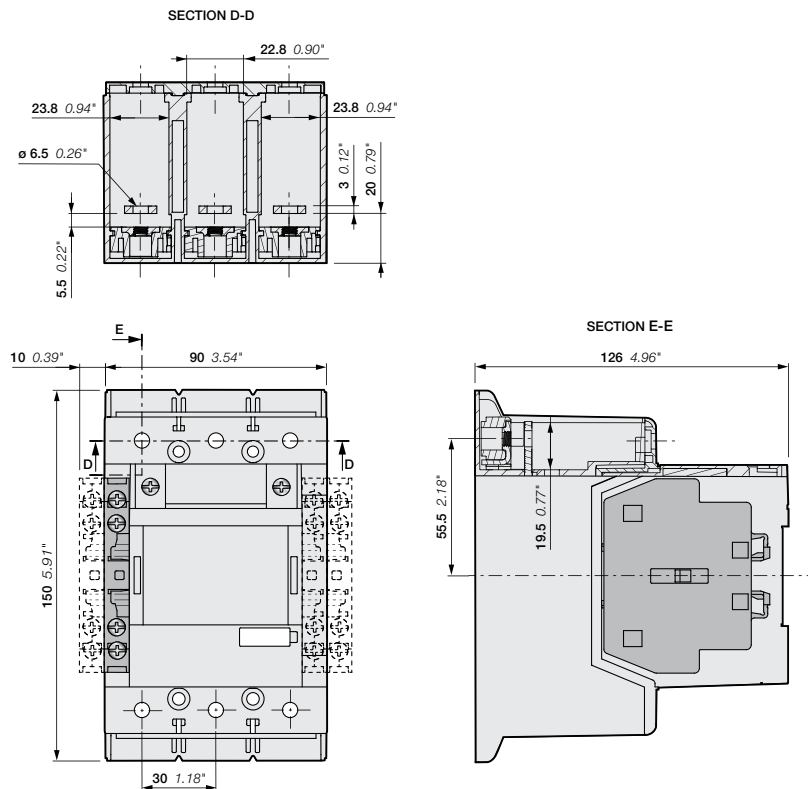

AF116, AF140, AF146-30-00B + CAL19 2-pole auxiliary contact block
AF116, AF140, AF146-30-11B

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Relays](#) category:

Click to view products by [ABB](#) manufacturer:

Other Similar products are found below :

[6-1618400-7](#) [686-117111](#) [686-120111](#) [EV250-4A-02](#) [EV250-6A-01](#) [FCA-125-CX8](#) [FCA-410-138](#) [8-1618393-1](#) [GCA32A208VAC60HZ](#)
[GCA32A220VAC50/60HZ](#) [GCA32A230VAC50/60HZ](#) [GCA32A240VAC50/60HZ](#) [GCA32A48VAC60HZ](#) [GCA63A120VAC50/60HZ](#)
[GCA63A208VAC60HZ](#) [GCA63A220VAC60HZ](#) [GCA63A230VAC50/60HZ](#) [GCA63A240VAC50/60HZ](#) [GCA63A277VAC60HZ](#)
[GCA63A48VAC60HZ](#) [GCA63A500VAC50/60HZ](#) [GCA63A600VAC60HZ](#) [GCA800A200VACDC](#) [GCA95A110VAC50/60HZ](#)
[GCA95A120VAC50/60HZ](#) [GCA95A12VDC](#) [GCA95A240VAC50/60HZ](#) [GCA95A24VAC50/60HZ](#) [GCA95A48VAC60HZ](#) [ACC530U20](#)
[ACC730U30](#) [1395832-1](#) [RM699BV-3011-85-1005](#) [RMIA210230AC](#) [RMIA45024AC](#) [1423675-8](#) [B07B032AC1-0329](#) [B329](#) [1617807-1](#)
[N417](#) [P25-E5019-1](#) [P30C42A12D1-120](#) [2-1618398-1](#) [PBO-18A1218](#) [2307497](#) [RPYA00324LT](#) [RPYA003A120LT](#) [KR-4539-1](#)
[RT334012WG](#) [S160156115](#)