



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089

NTE964 Integrated Circuit 3-Terminal Positive Voltage Regulator, 8V

The NTE964 fixed-voltage regulator is a monolithic integrated circuit in a TO220 type package designed for use in a wide variety of applications including local, on-card regulation. This regulator employs internal current limiting, thermal shutdown, and safe-area compensation. With adequate heat-sinking it can deliver output currents in excess of 1.0 ampere. Although designed primarily as a fixed voltage regulator, this device can be used with external components to obtain adjustable voltages and currents.

Features:

- Output Current in Excess of 1.0 Ampere
- No External Components Required
- Internal Thermal Overload Protection
- Internal Short-Circuit Current Limiting
- Output Transistor Safe-Area Compensation

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

| | |
|--|---------------------------------------|
| Input Voltage, V_{in} | 35Vdc |
| Power Dissipation ($T_A = +25^\circ\text{C}$), P_D | Internally Limited |
| Derate above $+25^\circ\text{C}$ | 15.4mW/ $^\circ\text{C}$ |
| Power Dissipation ($T_C = +25^\circ\text{C}$), P_D | Internally Limited |
| Derate above $+75^\circ\text{C}$ | 200mW/ $^\circ\text{C}$ |
| Thermal Resistance, Junction-to-Ambient, R_{thJA} | 65 $^\circ\text{C}/\text{W}$ |
| Thermal Resistance, Junction-to-Case, R_{thJC} | 5 $^\circ\text{C}/\text{W}$ |
| Operating Junction Temperature Range, T_J | -55 $^\circ$ to +150 $^\circ\text{C}$ |
| Storage Junction Temperature Range, T_{stg} | -65 $^\circ$ to +150 $^\circ\text{C}$ |


Electrical Characteristics: ($V_{in} = 14\text{V}$, $I_O = 500\text{mA}$, $T_J = 0^\circ$ to +125 $^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit | |
|-----------------|---------------------|---|--|-----|-----|------|----|
| Output Voltage | V_O | $T_J = +25^\circ\text{C}$ | 7.7 | 8.0 | 8.3 | V | |
| | | $5\text{mA} \leq I_O \leq 1\text{A}$, $P_O \leq 15\text{W}$, $10.5\text{V} \leq V_{in} \leq 23\text{V}$ | 7.6 | 8.0 | 8.4 | V | |
| Line Regulation | Reg_{line} | $T_J = +25^\circ\text{C}$, Note 1 | $10.5\text{V} \leq V_{in} \leq 25\text{V}$ | - | 12 | 160 | mV |
| | | | $11\text{V} \leq V_{in} \leq 17\text{V}$ | - | 5 | 80 | mV |
| Load Regulation | Reg_{load} | $T_J = +25^\circ\text{C}$, Note 1 | $5\text{mA} \leq I_O \leq 1.5\text{A}$ | - | 45 | 160 | mV |
| | | | $250\text{mA} \leq I_O \leq 750\text{mA}$ | - | 16 | 80 | mV |

Note 1. Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

Electrical Characteristics (Cont'd): ($V_{in} = 14V$, $I_O = 500mA$, $T_J = 0^\circ$ to $+125^\circ C$ unless otherwise specified)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|---|----------------|---|-----|------|-----|---------------|
| Quiescent Current | I_B | $T_J = +25^\circ C$ | - | 4.3 | 8.0 | mA |
| Quiescent Current Change | ΔI_B | $10.5V \leq V_{in} \leq 25V$ | - | - | 1.0 | mA |
| | | $5mA \leq I_O \leq 1A$ | - | - | 0.5 | mA |
| Ripple Rejection | RR | $11.5V \leq V_{in} \leq 21.5V$, $f = 120Hz$ | - | 62 | - | dB |
| Dropout Voltage | $V_{in} - V_O$ | $T_J = +25^\circ C$, $I_O = 1A$ | - | 2 | - | V |
| Output Noise Voltage | V_n | $T_A = +25^\circ C$, $10Hz \leq f \leq 100kHz$ | - | 10 | - | $\mu V/V_O$ |
| Output Resistance | r_O | $f = 1kHz$ | - | 18 | - | $m\Omega$ |
| Short-Circuit Current Limit | I_{sc} | $T_A = +25^\circ C$, $V_{in} = 35V$ | - | 0.2 | - | A |
| Peak Output Current | I_{max} | $T_J = +25^\circ C$ | - | 2.2 | - | A |
| Average Temperature Coefficient of Output Voltage | TCV_O | | - | -0.8 | - | $mV/^\circ C$ |

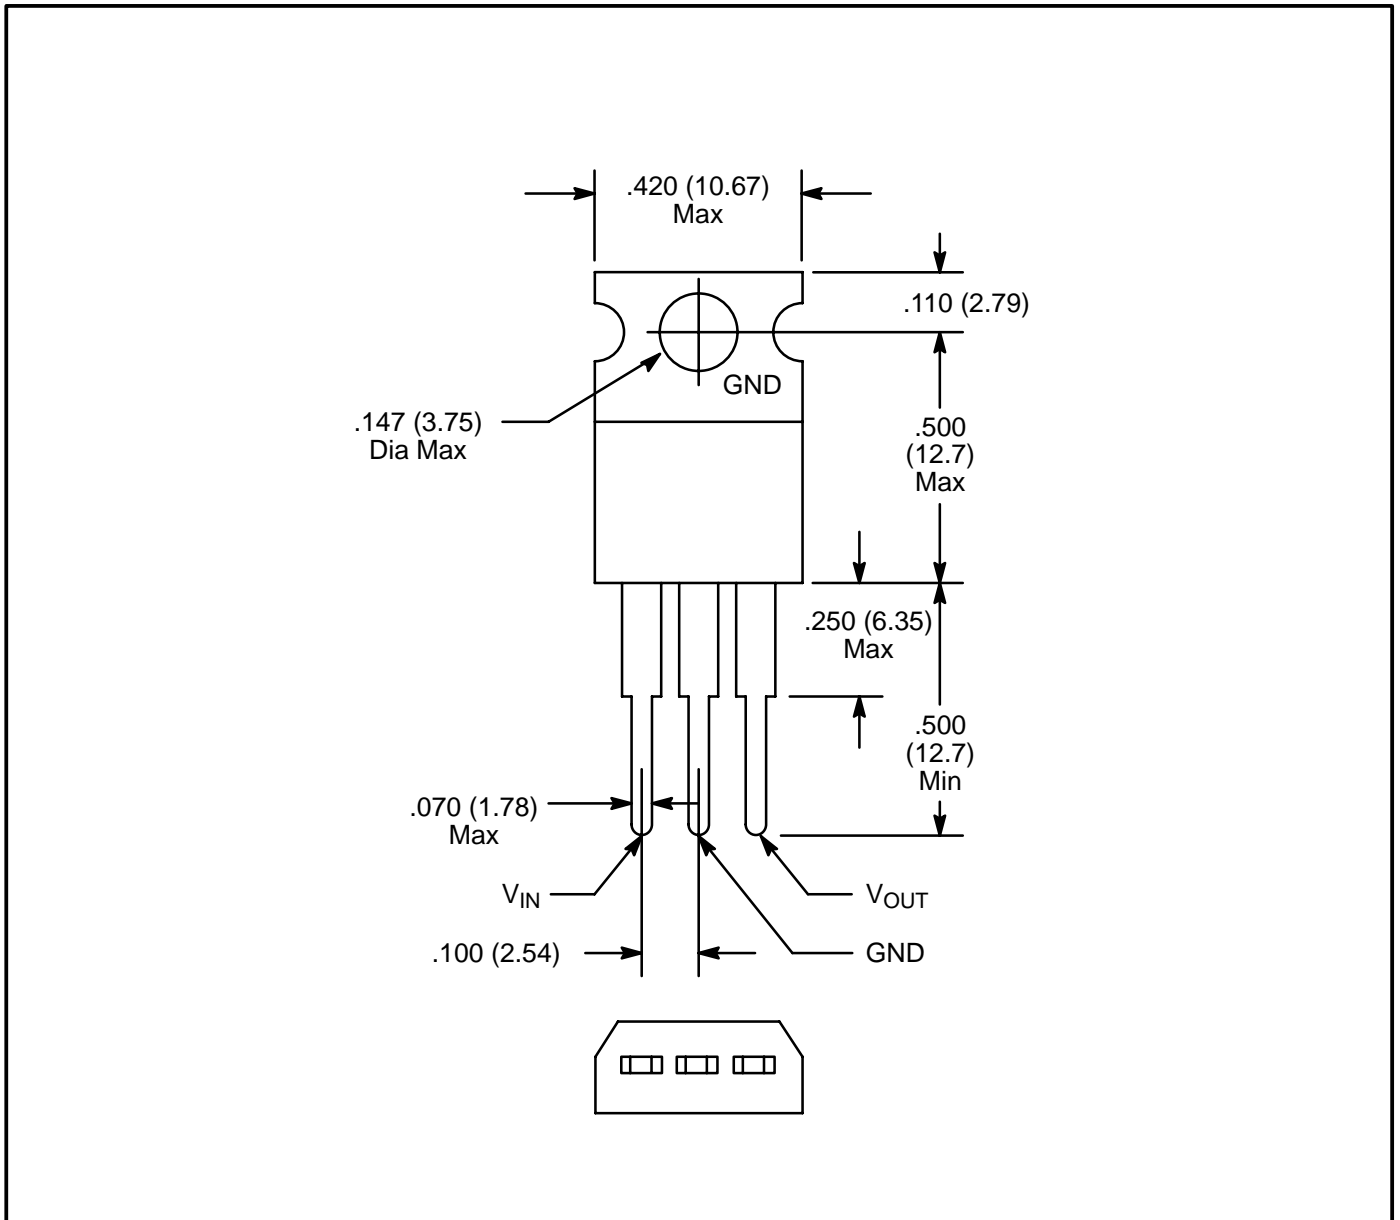

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MAX202ECWE-LF](#) [MCDTSA6-2R](#) [L4953G](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#)
[TCR3DF13,LM\(CT](#) [TCR3DF39,LM\(CT](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [L78MR05-E](#) [033150D](#) [033151B](#) [090756R](#)
[636416C](#) [NCV78M15BDTG](#) [702482B](#) [714954EB](#) [TLE42794GM](#) [TLE42994GM](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#)
[NCV78M05ABDTRKG](#) [NCV78M08BDTRKG](#) [NCP7808TG](#) [NCV571SN12T1G](#) [LV5680P-E](#) [CAJ24C256YI-GT3](#) [L78M15CV-DG](#) [L9474N](#)
[TLS202B1MBV33HTSA1](#) [L79M05T-E](#) [NCP571SN09T1G](#) [MAX15006AASA/V+](#) [MIC5283-5.0YML-T5](#) [L4969URTR-E](#) [L78LR05D-MA-E](#)
[NCV7808BDTRKG](#) [L9466N](#) [NCP7805ETG](#) [SC7812CTG](#) [NCV7809BTG](#) [NCV571SN09T1G](#) [NCV317MBTG](#) [MC78M15CDTT5G](#)
[MC78M12CDTT5G](#) [L9468N](#)