



## LV358

CMOS IC

### GENERAL PURPOSE, LOW VOLTAGE, RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS

#### DESCRIPTION

The UTC **LV358** is a dual op amp with low supply current and low voltage (2.7-5.5V). It brings nice performance to low voltage and low power systems. With a 1MHz unity-gain frequency. The UTC **LV358** has a guaranteed 1 V/ $\mu$ s slew rate and low supply current. It provides heavy rail-to-rail (R-to-R) output swing loads and the input common-mode voltage range including ground. Besides, it is also capable for comfortably driving large capacitive loads.


The UTC **LV358** has bipolar input and CMOS output for improved noise performance and higher output current drive. It's the most cost effective solution for the applications where low voltage operation, space saving and low price are required.

#### FEATURES

- \* 2.7V and 5V Performance Guaranteed
- \* No Crossover Distortion
- \* 210 $\mu$ A Low Supply Current
- \* Rail-to-Rail Output Swing  
@10k $\Omega$  Load  $V^+ - 10mV$   
 $V^- + 65mV$
- \*  $V_{CM}$  From  $-0.2V$  to  $V^+ - 0.8V$




#### ORDERING INFORMATION

| Ordering Number   |                   | Package   | Packing   |
|-------------------|-------------------|-----------|-----------|
| Lead Free         | Halogen Free      |           |           |
| LV358L-S08-R      | LV358G-S08-R      | SOP-8     | Tape Reel |
| LV358L-SM1-R      | LV358G-SM1-R      | MSOP-8    | Tape Reel |
| LV358L-P08-R      | LV358G-P08-R      | TSSOP-8   | Tape Reel |
| LV358L-K08-2030-R | LV358G-K08-2030-R | DFN2030-8 | Tape Reel |

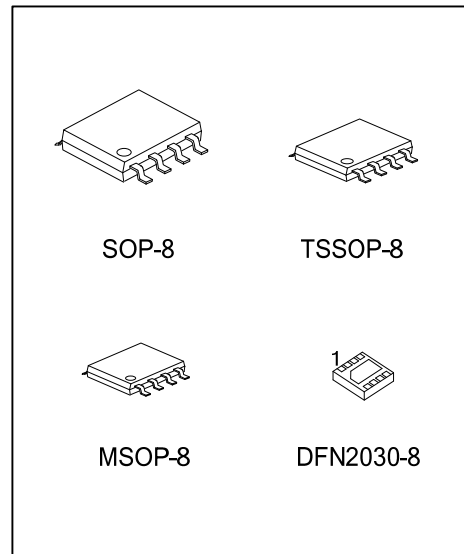


|  |   |
|--|---|
| <p>LV358G-S08-R</p> <p>(1) Packing Type<br/>(2) Package Type<br/>(3) Green Package</p> | <p>(1) R: Tape Reel<br/>(2) S08: SOP-8, P08: TSSOP-8, SM1: MSOP-8<br/>K08-2030: DFN2030-8<br/>(3) G: Halogen Free and Lead Free, L: Lead Free</p> |
|--|---|


MARKING
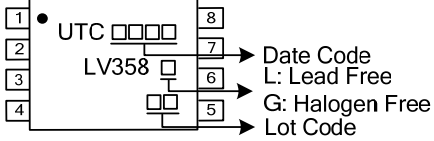
| PACKAGE        | MARKING  |
|----------------|--|
| SOP-8 / MSOP-8 |  |
| TSSOP-8        |  |
| DFN2030-8      |  |

PIN CONFIGURATION

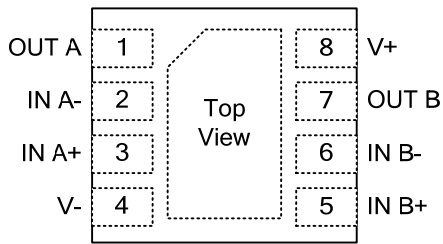


DFN2030-8

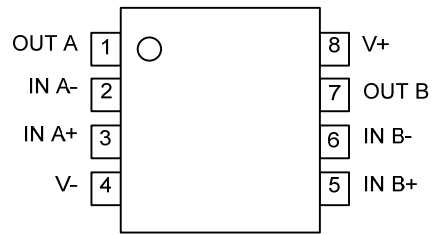


SOP-8 / TSSOP-8 / MSOP-8


BLOCK DIAGRAM

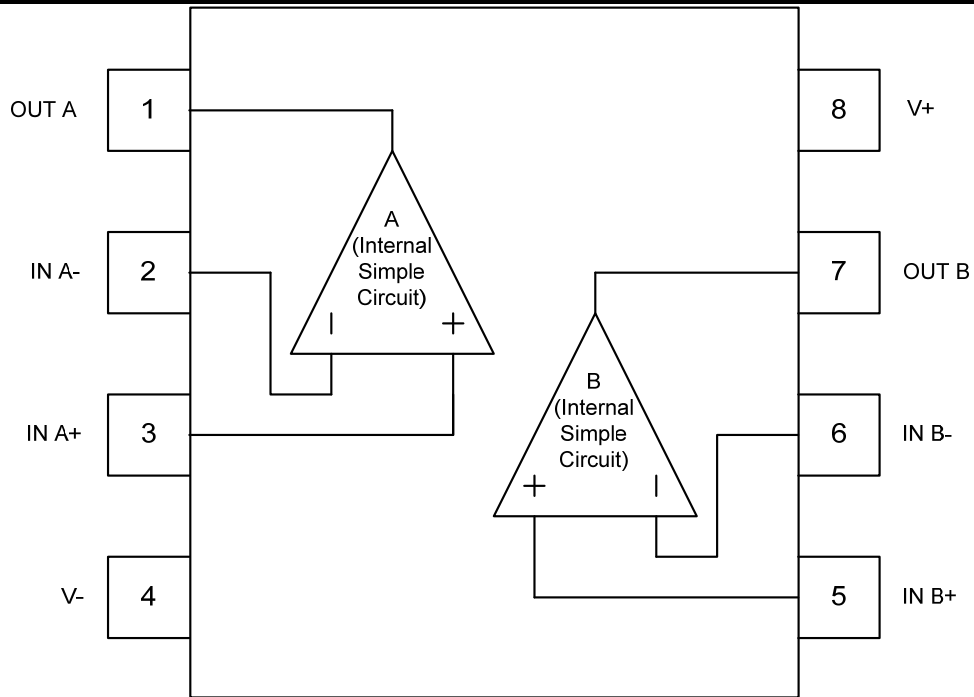

## INTERNAL SIMPLE CIRCUIT

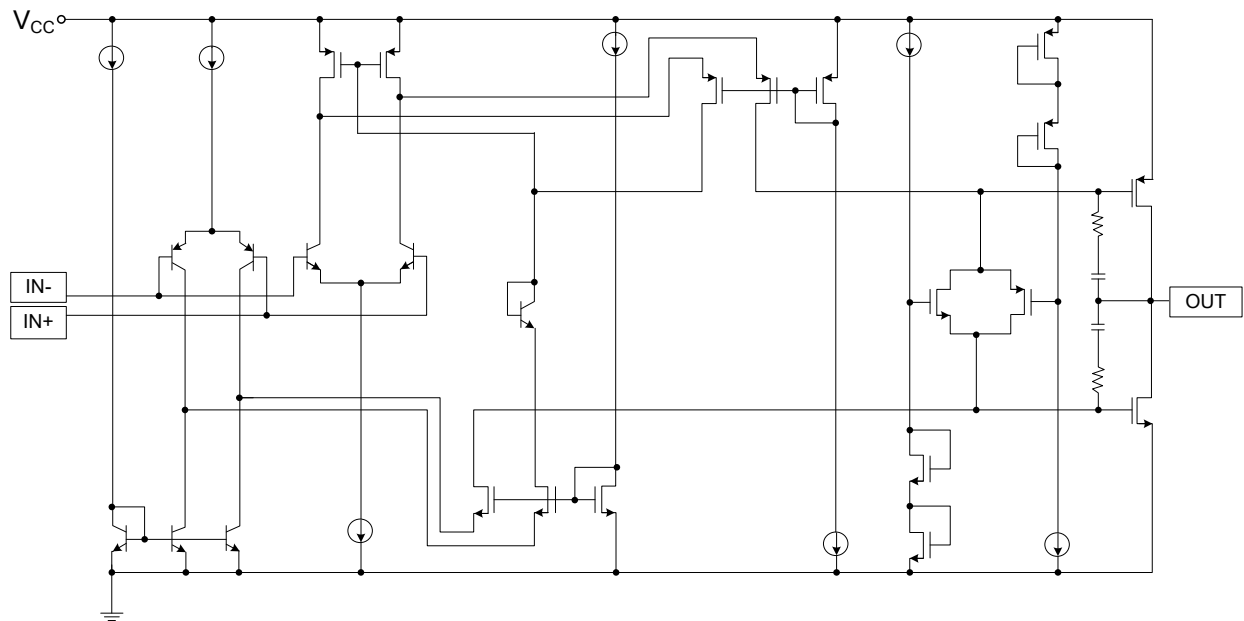

## TEST CIRCUIT FOR STABILITY VS CAPACITIVE LOAD

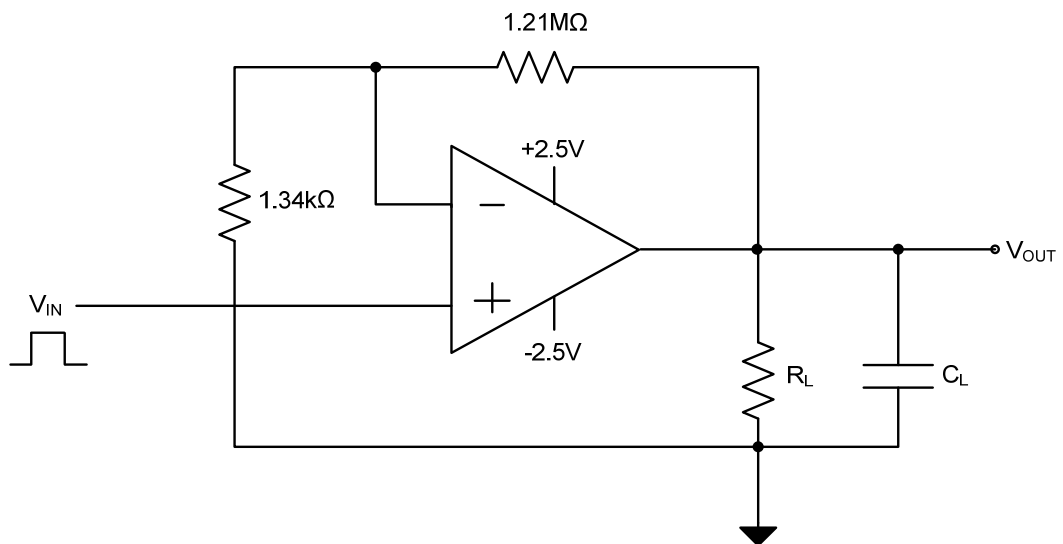

### ■ ABSOLUTE MAXIMUM RATINGS (Note1)

| PARAMETER                      | SYMBOL        | RATINGS              | UNIT        |
|--------------------------------|---------------|----------------------|-------------|
| Supply Voltage                 | $V_{SS}$      | 2.7 ~ 5.5            | V           |
| Supply Voltage ( $V^+ - V^-$ ) | $V_{SS}$      | 5.5                  | V           |
| Differential Input Voltage     | $V_{I(DIFF)}$ | $\pm$ Supply Voltage |             |
| Output Short Circuit           | $V^+$         | $I_{O(SC)}$          | (Note 2)    |
|                                | $V^-$         |                      | (Note 3)    |
| Infrared (15 sec)              |               | 215                  | $^{\circ}C$ |
| Junction Temperature           | $T_J$         | +150                 | $^{\circ}C$ |
| Operation Temperature          | $T_{OPR}$     | -40~+85              | $^{\circ}C$ |
| Storage Temperature            | $T_{STG}$     | -65~+150             | $^{\circ}C$ |

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

- Shorting output to  $V^+$  will adversely affect reliability
- Shorting output to  $V^-$  will adversely affect reliability

### ■ THERMAL DATA

| PARAMETER                   | SYMBOL        | RATINGS   | UNIT |               |
|-----------------------------|---------------|-----------|------|---------------|
| Thermal Resistance (Note 1) | $\theta_{JA}$ | SOP-8     | 190  | $^{\circ}C/W$ |
|                             |               | MSOP-8    | 235  | $^{\circ}C/W$ |
|                             |               | TSSOP-8   | 155  | $^{\circ}C/W$ |
|                             |               | DFN2030-8 | 59   | $^{\circ}C/W$ |

Note: All numbers are typical, and apply for packages soldered directly note a PC board is still air.

### ■ 2.7V ELECTRICAL CHARACTERISTICS

All limits guaranteed for  $T_J = 25^{\circ}C$ ,  $V^+ = 2.7V$ ,  $V^- = 0V$ ,  $V_{CM} = 1.0V$ ,  $V_{OUT} = V^+/2$  and  $R_L > 1M\Omega$ , unless otherwise specified.

| PARAMETER                          | SYMBOL        | CONDITIONS                               | MIN         | TYP        | MAX | UNIT                   |
|------------------------------------|---------------|--|-------------|------------|-----|------------------------|
| <b>DC CHARACTERISTICS</b>          |               |  |             |            |     |                        |
| Input Offset Voltage               | $V_{OS}$      |  |             | 1.7        | 7   | mV                     |
| Input Common Mode Voltage Range    | $V_{CM}$      | For CMRR $\geq$ 50dB                     | 0           | -0.2       |     | V                      |
|                                    |               |  |             | 1.9        | 1.7 | V                      |
| Output Swing                       | $V_{OUT}$     | $R_L = 10k\Omega$ to 1.35V               | $V^+ - 100$ | $V^+ - 10$ |     | mV                     |
|                                    |               |  |             | 60         | 180 | mV                     |
| Input Offset Voltage Average Drift | $TCV_{OS}$    |  |             | 5          |     | $\mu V/^{\circ}C$      |
| Input Bias Current                 | $I_{I(BIAS)}$ |  |             | 11         | 250 | nA                     |
| Input Offset Current               | $I_{I(OFF)}$  |  |             | 5          | 50  | nA                     |
| Common Mode Rejection Ratio        | CMRR          | $0V \leq V_{CM} \leq 1.7V$               | 50          | 63         |     | dB                     |
| Power Supply Rejection Ratio       | PSRR          | $2.7V \leq V^+ \leq 5V$ , $V_{OUT} = 1V$ | 50          | 60         |     | dB                     |
| Supply Current                     | $I_{SS}$      | Both amplifiers                          |             | 140        | 340 | $\mu A$                |
| <b>AC CHARACTERISTICS</b>          |               |  |             |            |     |                        |
| Gain Bandwidth Product             | GBWP          | $C_L = 200pF$                            |             | 1          |     | MHz                    |
| Phase Margin                       | $\Phi_m$      |  |             | 60         |     | Deg                    |
| Gain Margin                        | $G_m$         |  |             | 10         |     | dB                     |
| Input Referred Voltage Noise       | eN            | F=1KHz                                   |             | 46         |     | $\frac{nV}{\sqrt{Hz}}$ |
| Input Referred Current Noise       | $i_n$         | F=1KHz                                   |             | 0.17       |     | $\frac{pA}{\sqrt{Hz}}$ |

### ■ 5V ELECTRICAL CHARACTERISTICS







All limits guaranteed for  $T_J = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{\text{CM}} = 2.0\text{V}$ ,  $V_{\text{OUT}} = V^+/2$  and  $R_L > 1\text{M}\Omega$ , unless otherwise specified.

| PARAMETER                          | SYMBOL               | CONDITIONS  | MIN             | TYP         | MAX        | UNIT                                 |    |
|------------------------------------|----------------------|---|-----------------|-------------|------------|--------------------------------------|----|
| <b>DC CHARACTERISTICS</b>          |                      |   |                 |             |            |                                      |    |
| Input Offset Voltage               | $V_{\text{OS}}$      |   |                 | 1.7         | 7          | mV                                   |    |
| Input Common-Mode Voltage Range    | $V_{\text{CM}}$      | For $\text{CMRR} \geq 50\text{dB}$  | 0               | -0.2        |            | V                                    |    |
|                                    |                      |   |                 | 4.2         | 4          | V                                    |    |
| Output Swing                       | $V_{\text{OUT}}$     | $R_L = 2\text{K}\Omega$ to $2.5\text{V}$  | $V_{\text{OH}}$ | $V^+ - 300$ | $V^+ - 40$ | mV                                   |    |
|                                    |                      |   | $V_{\text{OL}}$ |             | 120        | 300                                  | mV |
|                                    |                      | $R_L = 10\text{K}\Omega$ to $2.5\text{V}$   | $V_{\text{OH}}$ | $V^+ - 100$ | $V^+ - 10$ |                                      | mV |
|                                    |                      |   | $V_{\text{OL}}$ |             | 65         | 180                                  | mV |
| Input Offset Voltage Average Drift | $\text{TCVos}$       |   |                 | 5           |            | $\mu\text{V}/^\circ\text{C}$         |    |
| Input Bias Current                 | $I_{\text{I(BIAS)}}$ |   |                 | 15          | 300        | nA                                   |    |
| Input Offset Current               | $I_{\text{I(OFF)}}$  |   |                 | 5           | 50         | nA                                   |    |
| Common Mode Rejection Ratio        | CMRR                 | $0\text{V} \leq V_{\text{CM}} \leq 4\text{V}$   | 50              | 65          |            | dB                                   |    |
| Power Supply Rejection Ratio       | PSRR                 | $2.7\text{V} \leq V^+ \leq 5\text{V}$<br>$V_{\text{OUT}} = 1\text{V}$ , $V_{\text{CM}} = 1\text{V}$ | 50              | 60          |            | dB                                   |    |
| Large Signal Voltage Gain(Note 1)  | $G_V$                | $R_L = 2\text{K}\Omega$   | 15              | 100         |            | V/mV                                 |    |
| Output Short Circuit Current       | $I_{\text{OUT}}$     | Sourcing, $V_{\text{OUT}} = 0\text{V}$  | 5               | 230         |            | mA                                   |    |
|                                    |                      | Sinking, $V_{\text{OUT}} = 5\text{V}$   | 10              | 160         |            | mA                                   |    |
| Supply Current                     | $I_{\text{SS}}$      | Both Amplifiers   |                 | 210         | 440        | $\mu\text{A}$                        |    |
| <b>AC CHARACTERISTICS</b>          |                      |   |                 |             |            |                                      |    |
| Slew Rate                          | SR                   | (Note 2)  |                 | 1           |            | V/ $\mu\text{s}$                     |    |
| Gain Bandwidth Product             | GBWP                 | $C_L = 200\text{pF}$  |                 | 1           |            | MHz                                  |    |
| Phase Margin                       | $\Phi_m$             |   |                 | 60          |            | Deg                                  |    |
| Gain Margin                        | $G_m$                |   |                 | 10          |            | dB                                   |    |
| Input Referred Voltage Noise       | eN                   | $f = 1\text{KHz}$   |                 | 39          |            | $\frac{\text{nV}}{\sqrt{\text{Hz}}}$ |    |
| Input Referred Current Noise       | $i_n$                | $f = 1\text{KHz}$   |                 | 0.21        |            | $\frac{\text{pA}}{\sqrt{\text{Hz}}}$ |    |







Notes: 1.  $R_L$  is connected to  $V^-$ . The output voltage is  $0.5\text{V} \leq V_{\text{OUT}} \leq 4.5\text{V}$ .

2. Connected as voltage follower with 3V step input. Number specified is these lower of the positive and negative slew rates

■ TYPICAL CHARACTERISTICS

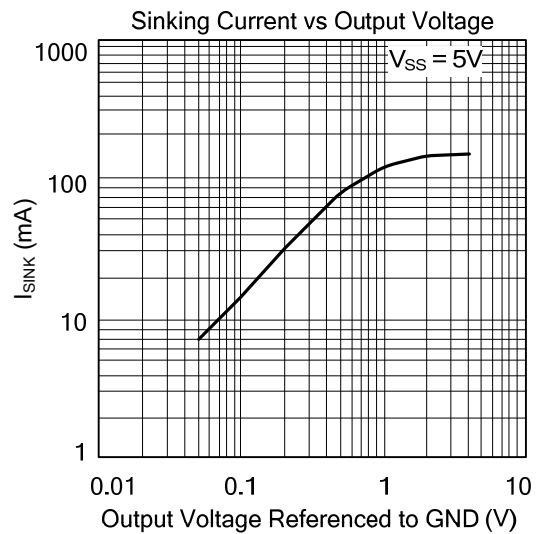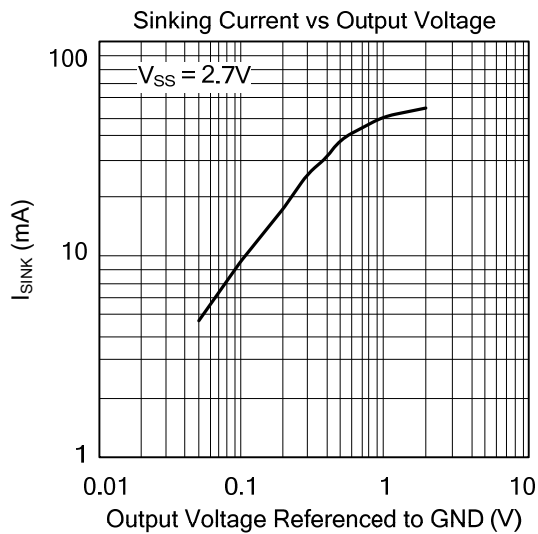
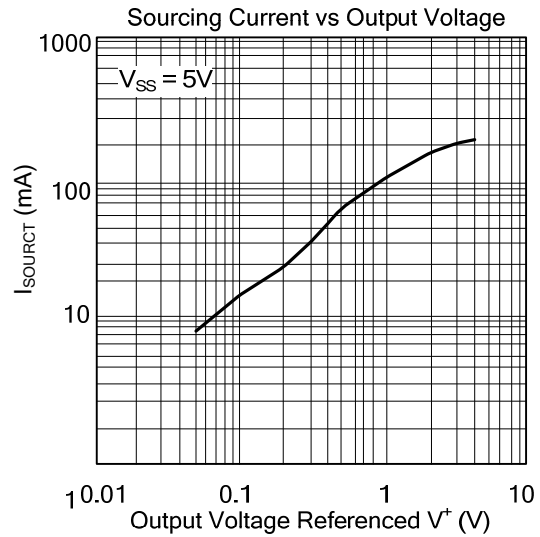
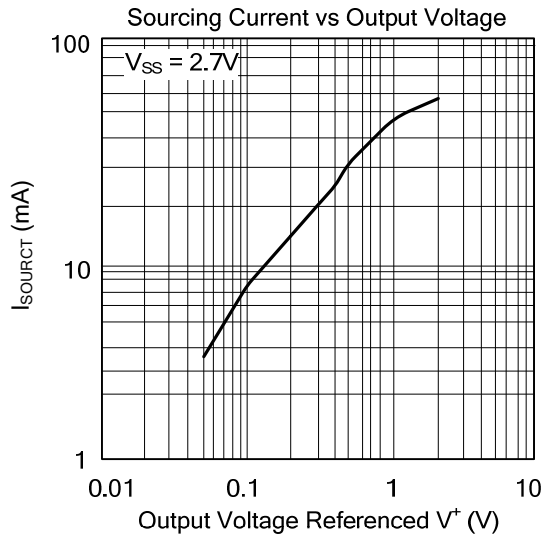
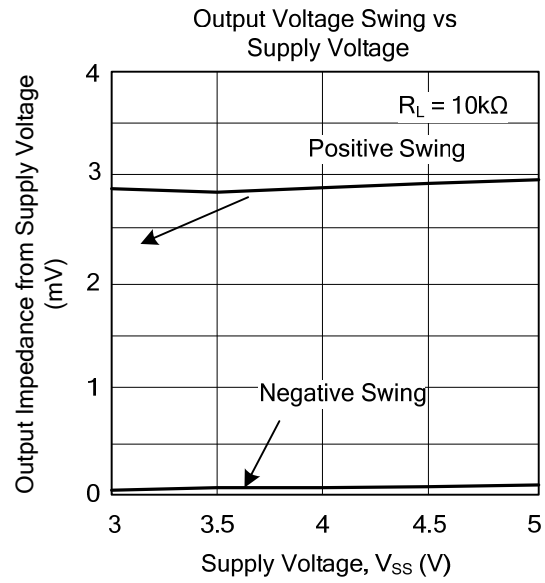
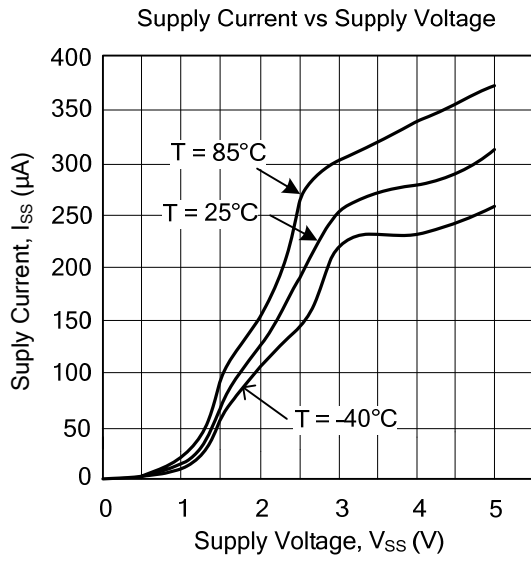


■ TYPICAL CHARACTERISTICS(Cont.)

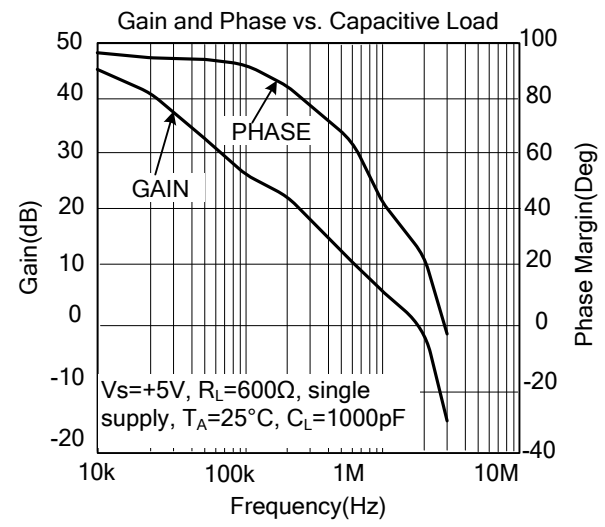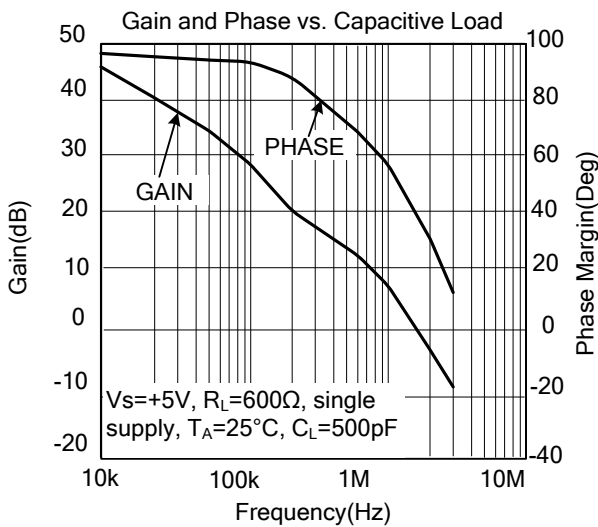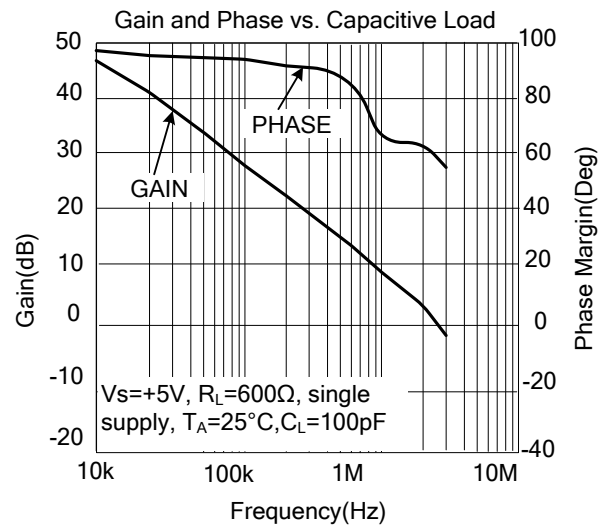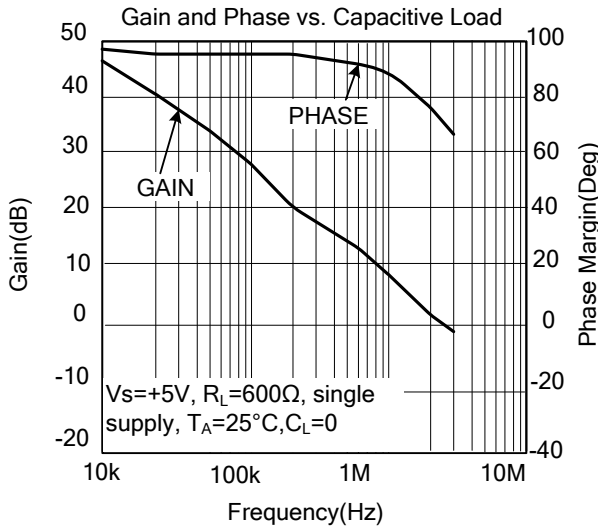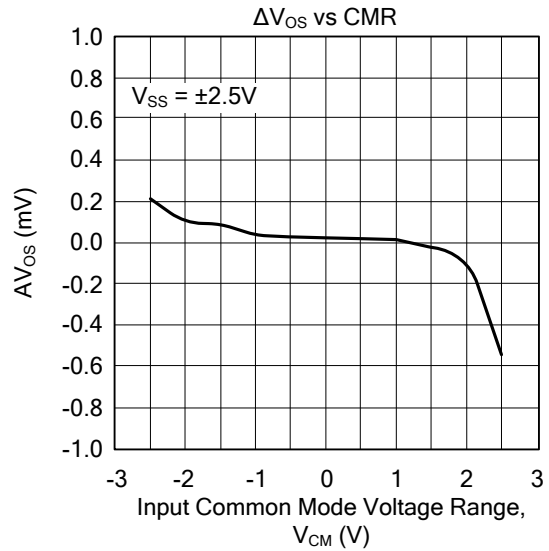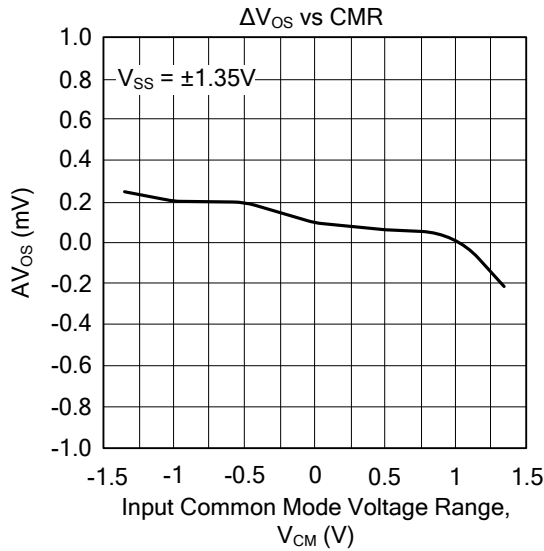




■ TYPICAL CHARACTERISTICS(Cont.)

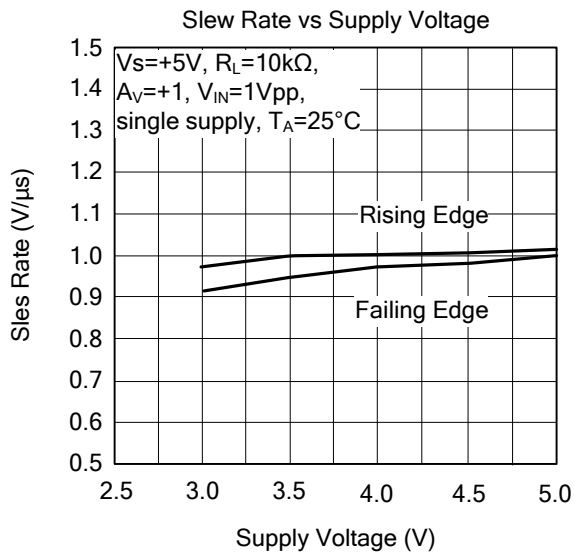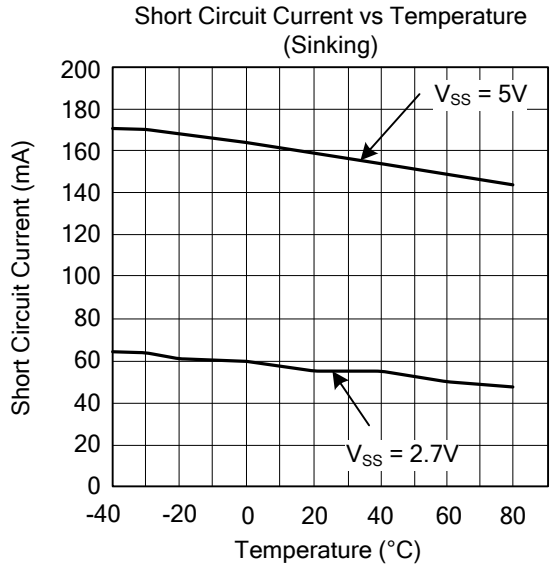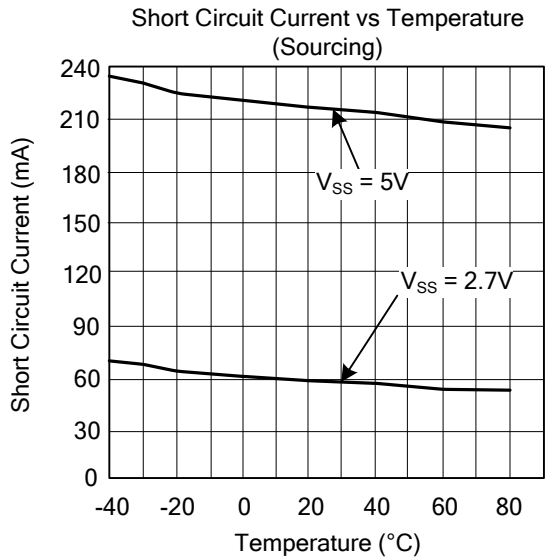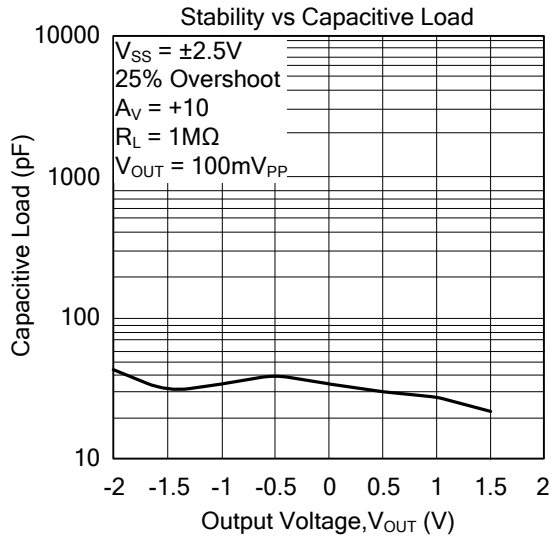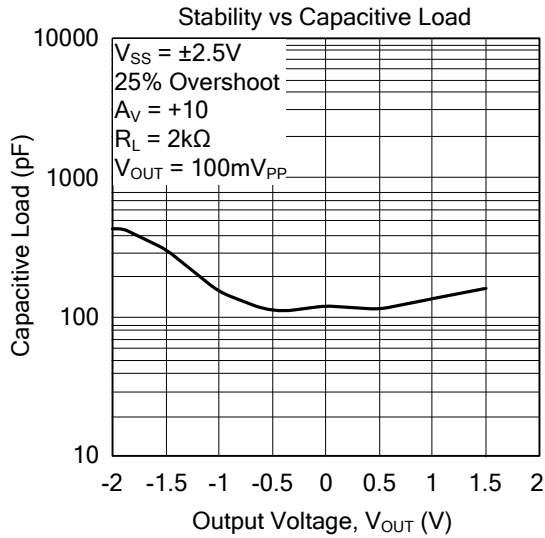


■ TYPICAL CHARACTERISTICS(Cont.)


Non-Inverting Large Signal Pulse Response

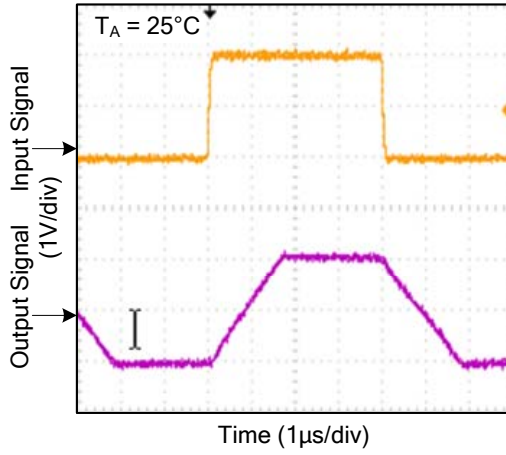


Non-Inverting Large Signal Pulse Response

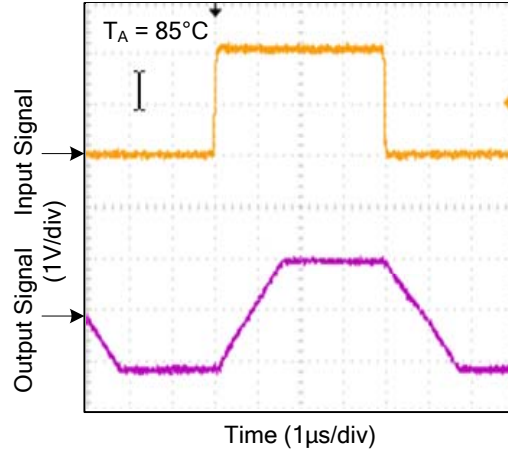


Non-Inverting Large Signal Pulse Response

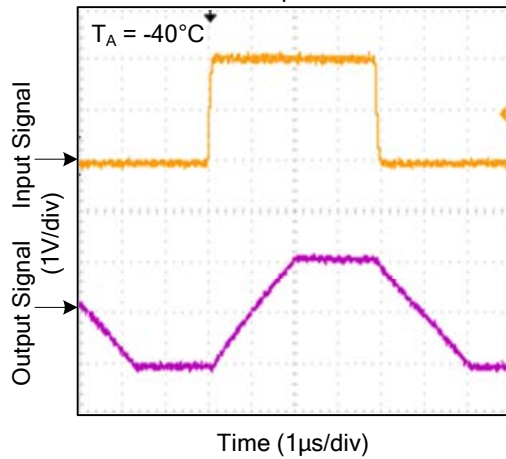


Non-Inverting Small Signal Pulse Response

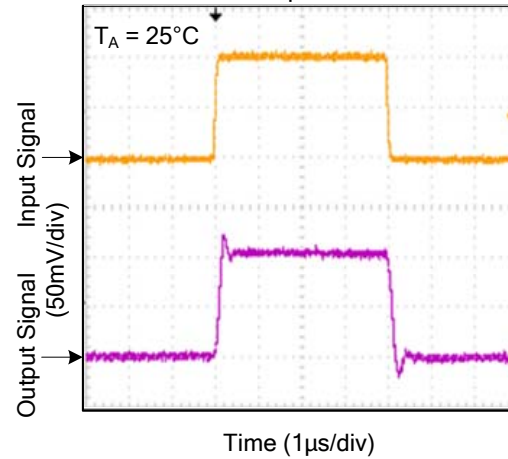







Non-Inverting Small Signal Pulse Response

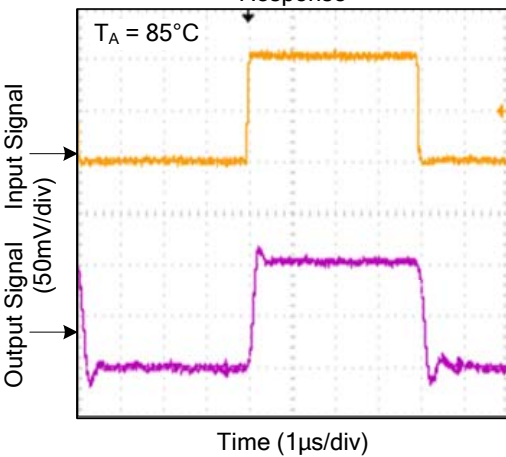

Non-Inverting Small Signal Pulse Response

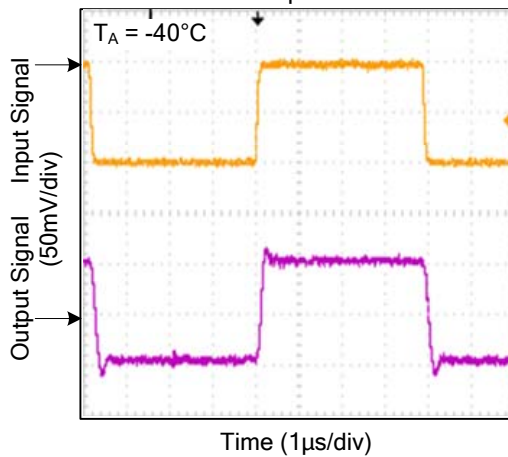

■ TYPICAL CHARACTERISTICS(Cont.)

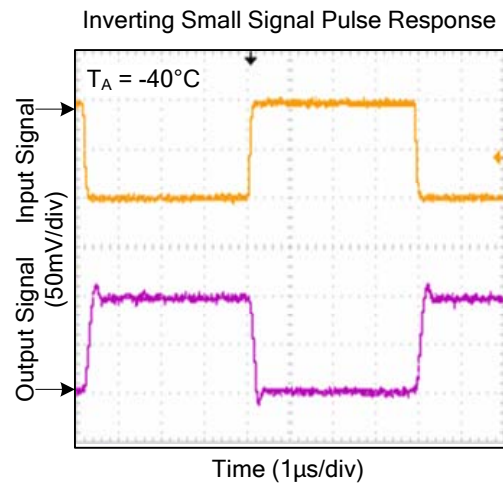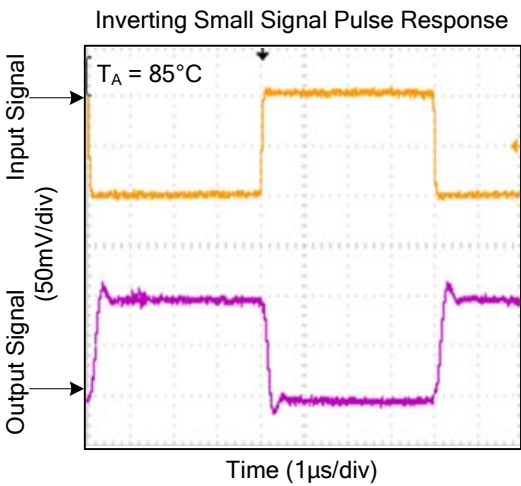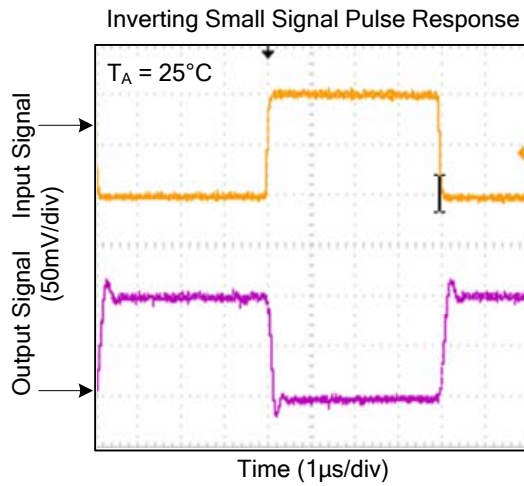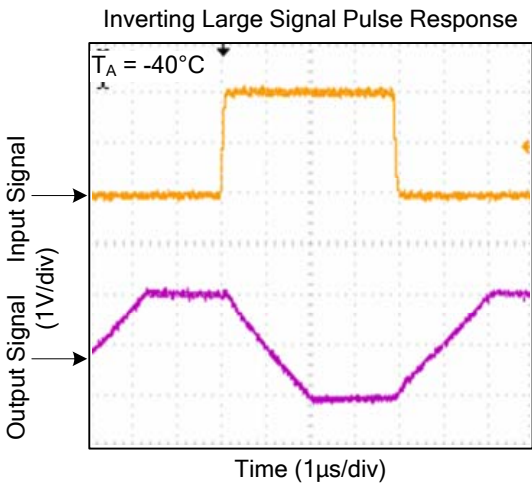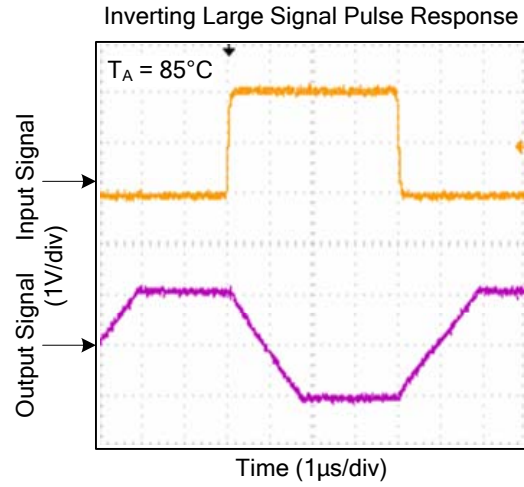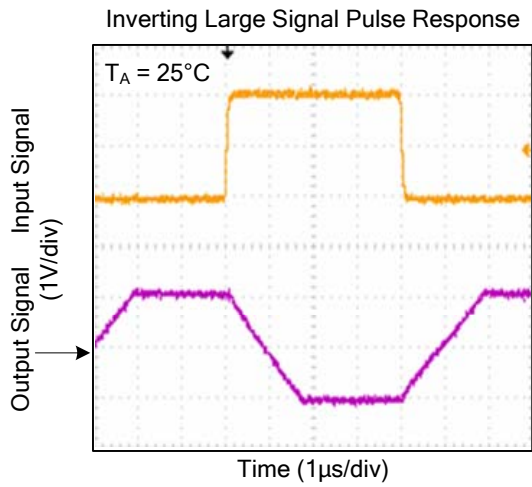

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Operational Amplifiers - Op Amps](#) category:*

*Click to view products by [Unisonic](#) manufacturer:*

Other Similar products are found below :

[430227FB](#) [AZV831KTR-G1](#) [UPC824G2-A](#) [LT1678IS8](#) [042225DB](#) [058184EB](#) [UPC822G2-A](#) [UPC258G2-A](#) [NCS5651MNTXG](#)  
[NCV33202DMR2G](#) [NJM324E](#) [NTE925](#) [5962-9080901MCA\\*](#) [AP4310AUMTR-AG1](#) [HA1630D02MMEL-E](#) [HA1630S01LPEL-E](#)  
[SCY33178DR2G](#) [NJU77806F3-TE1](#) [NCV5652MUTWG](#) [NCV20034DR2G](#) [LM2902EDR2G](#) [NTE778S](#) [NTE871](#) [NTE924](#) [NTE937](#)  
[MCP6V16UT-E/OT](#) [MCP6V17T-E/MS](#) [MCP6V19T-E/ST](#) [SCY6358ADR2G](#) [LTC2065IUD#PBF](#) [NCS20282FCTTAG](#) [UPC4741G2-E1-A](#)  
[LM4565FVT-GE2](#) [EL5420CRZ-T7A](#) [TSV791IYLT](#) [TSV772IQ2T](#) [AS324AMTR-E1](#) [TLV2772QPWR](#) [NJM4556AM-TE1](#) [NJM2068M-TE1](#)  
[AS324MTR-E1](#) [AS358MMTR-G1](#) [MCP6232T-EMNY](#) [MCP662-E/MF](#) [TLC081AIP](#) [TLC082AIP](#) [TLE2074ACDW](#) [TLV07IDR](#)  
[TLV2170IDGKT](#) [TLV2455IDR](#)