

SOM Evaluation Kits


VIA SOM-5000

Fanless low-power platform for Edge AI applications with MediaTek Genio 700 Octa-Core processor

Features

- High-performance MediaTek Genio 700 Octa-Core SoC
- Integrated AI processor for Edge AI applications
- 4K hardware accelerated H.265/H.264 video processing
- Dual display and dual MIPI CSI-2 camera support
- Optional 4G LTE mobile broadband support with onboard M.2 and SIM card slots

Board Placement

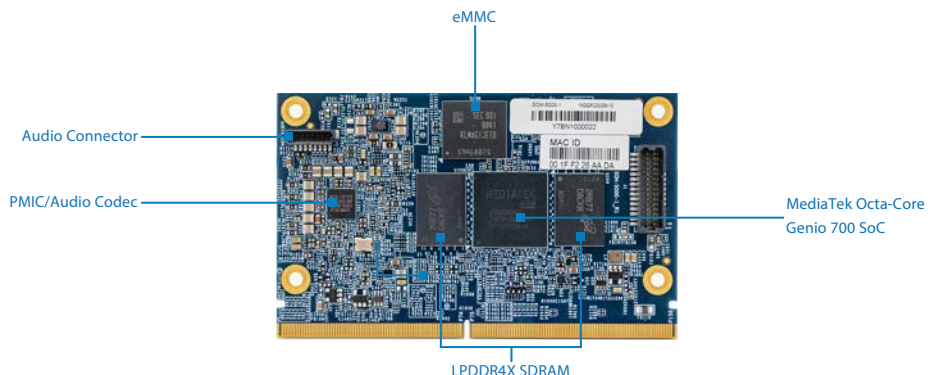

Specifications


Model Name	SOM-5000
Processor	MediaTek Genio 700 Octa-Core Processor - Two Cortex-A78 @ 2.2GHz - Six Cortex-A55 @ 2.0GHz
System Memory	8GB LPDDR4X SDRAM
Storage	16GB eMMC Flash Memory
Graphics	ARM Mali-G57 MC3 High Performance GPU Graphics engine supporting OpenGL® ES 1.1/2.0/3.2, OpenCL ES 2.2, and Vulkan 1.0/1.1 hardware acceleration Supports H.265 and H.264 video decoding up to 4K@75fps Supports H.265 and H.264 video encoding up to 4K@30fps Supports Cadence Tensilica Vision P6 AI accelerated processing and HiFi 5 audio processing
Ethernet	Integrated Gigabit Ethernet Transceiver
PMIC/Audio Codec	MediaTek MT6365
HDMI	Integrated HDMI 2.0 Transmitter
Supported I/O through Golden Finger	2 4-Lane MIPI DSI 2 MIPI CSI (1 x 4-Lane, 1 x 2-Lane) 1 HDMI 2.0 1 Display Port 1 USB 3.1 3 USB 2.0 2 SPI 1 I2S 6 I2C (including I2C for HDMI) UART x3 1 PCIe 1 SDIO 1 Gigabit Ethernet 11 GPIO 5V DC-in
Onboard I/O	1 Audio connector for Headphone out and MIC-in
Operating System	Android 13, Yocto 4.0, Debian 12
System Monitoring and Management	Watchdog Timer and System Management
Operating Temperature	0°C ~ 60°C (wider range can be supported on request)
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)
Form Factor	SMARC 2.11 (82mm x 50mm, 3.22" x 2")
Compliance	CE, FCC, UKCA




SOMDB7 Carrier Board Front I/O



SOMDB7 Carrier Board Back I/O

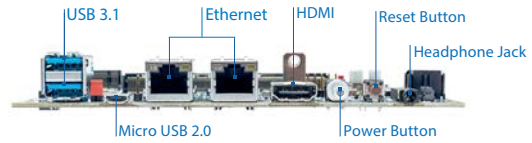

SOMDB7 Carrier Board Bottom I/O

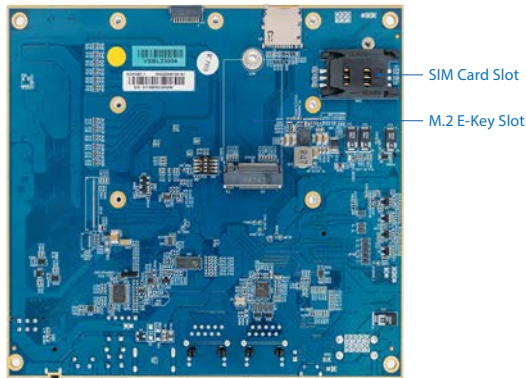

SOMDB7 Carrier Board



Specifications

Model Name	SOMDB7 Carrier Board
LVDS	Chrontel CH7515 eDP/DP to LVDS Converter
Ethernet	Realtek RTL8153 GbE USB 3.0 Ethernet Network Interface Controller
USB	VIA VL817 USB 3.1 Gen1 Hub Controller
MCU	STMicroelectronics STM32L011F4P6 32-bit MCU
Onboard I/O	1 4-Lane MIPI-DSI connector 2 LVDS dual-channel connectors (up to QSXGA 2560x2048@60Hz) 2 MIPI CSI-2 connectors (1 x 4-Lane, 1 x 2-Lane) 1 SIM card slot 1 M.2 B-key slot (supports USB 3.1/USB 2.0/SIM) 1 M.2 E-key slot (supports PCIe x1) 1 ADC/GPIO pin header (for multiplexed Analog inputs/GPIOs) 1 RTC battery connector 1 Debug console connector 1 12V DC-in power connector
Front I/O	1 Download/Volume+ button 1 Volume- button 1 MicroSD card slot
Back I/O	1 HDMI port 2 USB 3.1 ports 1 Micro USB 2.0 port (for image download) 2 GLAN ports 1 3.5mm phone jack (supports Headphone-out and MIC-in) 1 Reset button 1 Power button with LED
Power Supply	12V DC-in
Operating Temperature	0°C ~ 60°C
Operating Humidity	0% ~ 95% (relative humidity ; non-condensing)
Form Factor	151mm x 134mm (5.94" x 5.28")

Ordering Information


Part Number	SoC Frequency	Description
STK-SOM500-00A0	MediaTek Genio 700 Octa-Core SoC @ 2.2GHz/2.0GHz	VIA SOM-5000 Evaluation Kit with VIA SOM-5000 module, VIA SOMDB7 carrier board and accessory kit

Optional Accessories

Wireless Module Option

Part Number	Description
EMIO-2576-00A0	4G LTE mobile broadband M.2 module with two antennas and assembly

Block Diagram

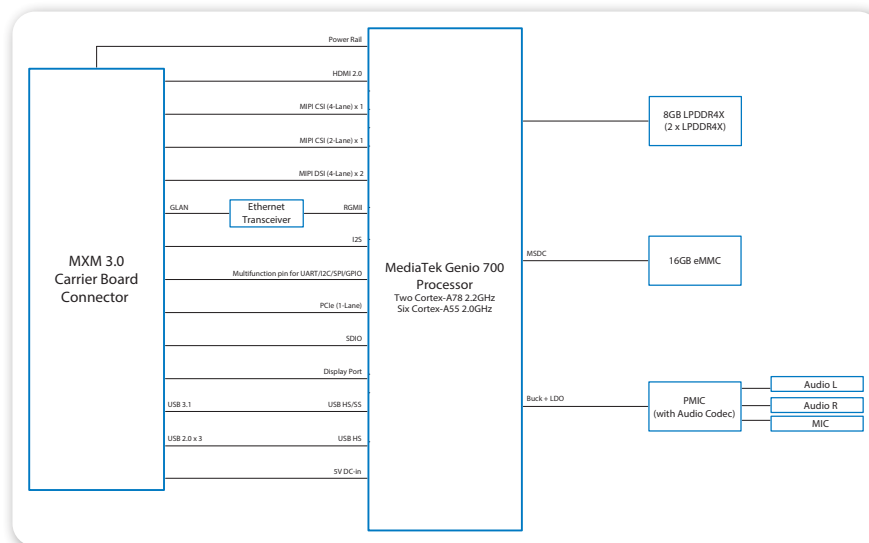

Evolution Kit Packing List

Items

- VIA SOM-5000 module
- VIA SOMDB7 carrier board
- 7" MIPI LCD and touch panel
- Wi-Fi/BT module with 3 x antennas
- 5MP CMOS sensor camera module
- Heatsink
- Audio cable
- Power cable
- Debug console cable
- 12V AC power adapter

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - ARM category](#):

Click to view products by [VIA manufacturer](#):

Other Similar products are found below :

[CY4541](#) [OM13090UL](#) [YR0K77210B000BE](#) [B-U585I-IOT02A](#) [NUCLEO-WL55JC1](#) [ZDSD-Pinboard](#) [LKS32MC034DOF6Q8-k](#)
[LKS32MC077MBS8-K](#) [LKS32MC038Y6P8B-K](#) [LKS32MC071DOC8T8-K](#) [LKS32MC074DOF8Q8-K](#) [LKS32MC071CBT8-K](#)
[LKS32MC038Y6P8-k](#) [Ai-WB2-32S-Kit](#) [GD32E103T-START](#) [GD32L233K-START](#) [XDS601](#) [RP2040-Tiny](#) [M6G2C-256LI](#) [YT37](#)
[LKS32MC033H6P8B-K](#) [VC-02-Kit_EN](#) [Ra-08H-Kit](#) [Hi-12FL-Kit](#) [PB-03M-Kit](#) [Ai-WB2-13-Kit](#) [PB-03F-Kit](#) [Ra-08-Kit](#) [Hi-07SL-Kit](#) [Hi-](#)
[07S-Kit](#) [Ai-WB2-12F-Kit](#) [PB-03-Kit](#) [Hi-12F-Kit](#) [AT-START-F407](#) [E104-BT40-TB](#) [APM32F072VBT6](#) [APM32F091VC MINI](#)
[APM32F407IG-MINIBOARD](#) [APM32F051R8 MINI](#) [GD32FPRT-START](#) [GD32407H-START-1](#) [GD32E503V-EVAL](#) [GD32E507R-START](#)
[GD32403V-START-1](#) [EPC1EVK-ECGPPG\(FS\)](#) [NS4EVKA-LC](#) [ENS1EVKD](#) [.ENS1EVKB](#) [ENS1EVKE](#) [HLK-7621-ALL-SUIT](#)