

ARM-based Pico-ITX Series


VIA VAB-600

Flexible low-power platform for a broad range of interactive multimedia applications

Features

- Compact 10cm x 7.2cm Pico-ITX form factor
- 800MHz VIA Cortex-A9 SoC
- Support for two COM ports (TX/RX)
- Optional Wi-Fi module
- Android and Linux software solution packs available

Board Placement

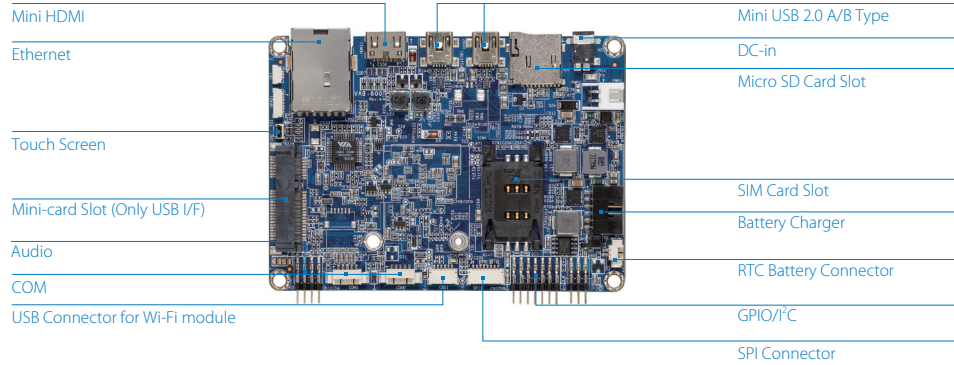


Specifications

Model Name	VAB-600
Processor	800MHz VIA Cortex-A9 SoC
System Memory	1GB DDR3 SDRAM onboard
Storage	4GB eMMC Flash memory
Boot Loader	512KB SPI Flash ROM
Graphics	Mali-400 SP GPU 2 integrated, independent 3D/2D graphics processing units Graphics engine supporting OpenGL® ES 2.0 hardware acceleration Supports MPEG-2, VC-1 and H.264 video decoding up to 1080p
LAN	VIA VT6113 10/100 base-TX PHY chip
Audio	VIA VT1603A I2S Audio Codec
HDMI	Integrated HDMI 1.4 transmitter
Expansion I/O	1 miniPCIe slot (supports USB 2.0 connectivity for optional 3G module)
Onboard I/O	1 USB 2.0 connector 1 DVO connector for TTL or LVDS display (corresponding daughter card required) 2 COM port connectors (TX/RX) 1 Miscellaneous pin header for 1 I ² C pair and 1 DIO (4 GPI + 4 GPO) 1 SIM card slot (supports 3G module without built-in SIM card slot) 1 RTC battery pin header 1 Keypad connector 1 CIR connector 1 SPI Flash pin header 1 Front panel pin header for system power-on, reset and power LED 1 4-wire resistive touch screen FPC connector (through VT1603A) 1 Front audio pin header for Line-out, Mic-in 1 DC-in connector 1 Battery charger connector with smart battery function (manufacturing option) 1 miniPCIe slot (supports USB 2.0 connectivity for optional 3G module)
Back Panel I/O	2 Mini USB 2.0 ports 1 Mini HDMI port 1 10/100Mbps Ethernet port 1 Micro SD card slot 1 DC-in jack
Operating System	Android 4.0.3, Linux kernel 3.0.8
Power Supply	12 ~ 24V DC-in
Operating Temperature	0°C ~ 60°C
Operating Humidity	0% ~ 95% (non-condensing)
Form Factor	Pico-ITX (10cm x 7.2cm, 3.9" x 2.8")




Back Panel I/O

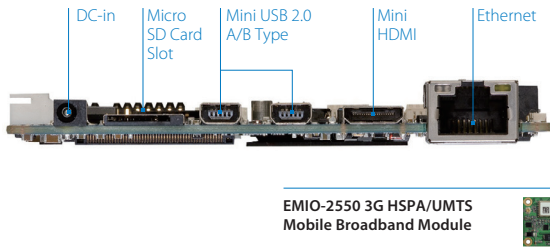

EMIO-2550 3G HSPA/UMTS Mobile Broadband Module

Accessories

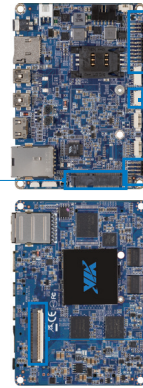

VAB-600-A
I/O card for Line-out/
Mic-in, 2 USB 2.0, power
button



EMIO-1533 USB Wi-Fi Module
802.11b/g/n standards



VAB-600-B
Additional 4 COM ports



VAB-600-C
TTL converter card



VAB-600-D
LVDS converter card

Ordering Information

Part Number	SoC Frequency	Description
10GAU082000A0	VIA Cortex-A9 @ 800MHz	Pico-ITX board with 800MHz VIA Cortex-A9 SoC, 4GB eMMC, 512KB SPI Flash ROM, 1GB DDR3 SDRAM, Mini HDMI, 2 Mini USB 2.0, 2 COM, 10/100Mbps Ethernet, 12 ~ 24V DC-in

Optional Accessories


I/O Expansion Cards

Part Number	Description
10GAX00000020	VAB-600-A I/O card for Line-out/Mic-in, 2 USB 2.0, Power button
10GAZ00000020	VAB-600-B I/O card for additional 4 COM ports
10GBC00000020	VAB-600-C TTL converter card
10GBD00000020	VAB-600-D Dual-CH LVDS converter card

Wireless Modules

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit
EMIO-2550-01A1	3.75G HSPA/UMTS mobile broadband full size miniPCIe module

Block Diagram

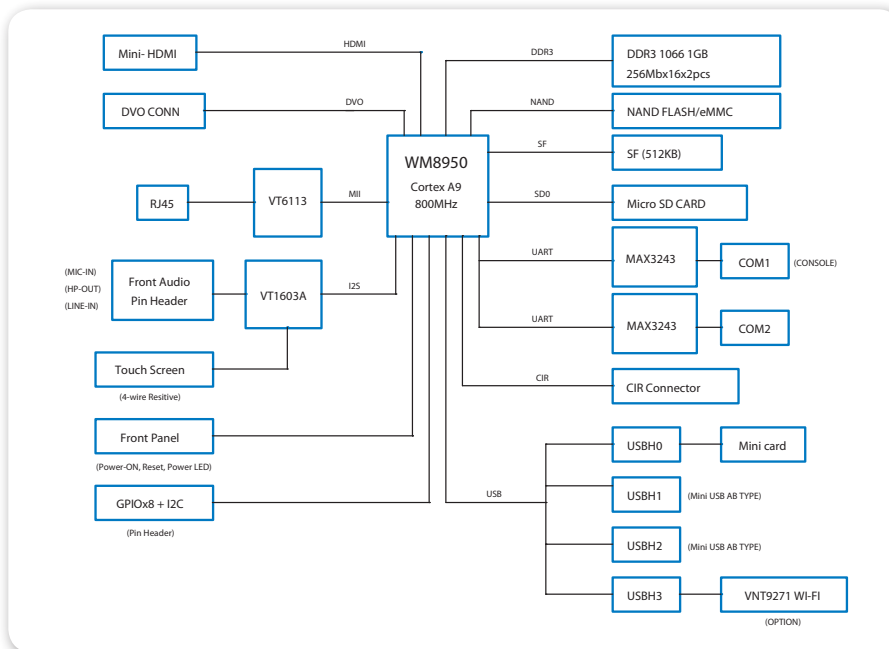

Packing List

Items
VAB-600 board
DC-in cable
Front panel cable
Front audio cable
COM connector cable
USB cable (for optional Wi-Fi USB module)

Items for Starter Kit

VAB-600 board
VAB-600-A
VAB-600-D (with cable) (optional)
Keypad cable
GPIO/I ² C cable
Front panel cable
Front audio cable
COM cable
AC-to-DC adapter
DC-in cable
Mini USB cable
USB cable (for Wi-Fi USB module)
7" LVDS panel (with cable) (optional)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - Other Processors](#) category:

Click to view products by [VIA manufacturer](#):

Other Similar products are found below :

[KIT_AURIX_TC233LP_TRB](#) [EVB-MEC1418MECC](#) [SPC56XVTOP-M](#) [ADZS-BF506F-EZLITE](#) [20-101-1252](#) [T1023RDB-PC](#) [20-101-1267](#)
[ML610Q174 REFERENCE BOARD](#) [MPC574XG-MB](#) [BSC9132QDS](#) [C29XPCIE-RDB](#) [KIT_TC1793_SK](#) [CC-ACC-18M433](#) [P1010RDB-PB](#)
[P1020RDB-PD](#) [P2020COME-DS-PB](#) [STM8S/32-D/RAIS](#) [T4240RDB-PB](#) [TRK-USB-MPC5604B](#) [TWR-56F8200](#) [SPC58XXADPT176S](#)
[MAX1464EVKIT](#) [TRK-MPC5606B](#) [RTE510Y470TGB00000R](#) [STM8128-MCKIT](#) [MAXQ622-KIT#](#) [YRPBRL78G11](#) [SPC58EEMU](#) [QB-](#)
[R5F10JGC-TB](#) [YQB-R5F11BLE-TB](#) [SPC564A70AVB176](#) [RTE5117GC0TGB00000R](#) [QB-R5F100LE-TB](#) [YR0K50571MS000BE](#) [YQB-](#)
[R5F1057A-TB](#) [CC-ACC-ETHMX](#) [SPC563M64A176S](#) [P1021RDB-PC](#) [SPC58XCADPT176S](#) [RTE510MPG0TGB00000R](#) [YRPBRX71M](#)
[OV-7604-C7-EVALUATION-BOARD](#) [ZL3ETH](#) [NEXYS A7-100T](#) [NEXYS A7-50T FPGA TRAINER BOARD](#) [MIKROMEDIA 7](#)
[CAPACITIVE](#) [ADZS-21569-EZKIT](#) [SK-AD02-D62Q1747TB](#) [SK-BS01-D62Q1577TB](#) [USB104 A7:ARTIX-7 FPGA BOARD PC/104](#)