



G-6 1/2 Contact Bayonet Base

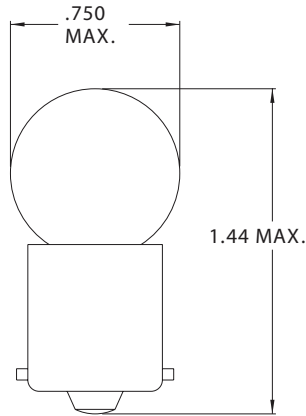

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM81 | 6.5 | 1.02 | 6.0 | 500 | C-2R |
| CM63 | 7.0 | .63 | 3.0 | 1,000 | C-2R |
| CM89 | 13.0 | .58 | 6.0 | 750 | C-2R |
| CM98 | 13.0 | .62 | 6.0 | 800 | C-2V |
| CM67 | 13.5 | .59 | 4.0 | 5,000 | C-2R |
| CM69 | 13.5 | .59 | 4.0 | 5,000 | C-2F |
| CM97 | 13.5 | .69 | 4.0 | 5,000 | C-2V |
| CM1155 | 13.5 | .59 | 4.0 | 5,000 | C-2R |
| CM631 | 14.0 | .63 | 6.0 | 1,000 | C-2R |
| CM1247 | 14.0 | .43 | 3.0 | 1,000 | C-2R |
| CM71 | 22.0 | .18 | 3.0 | 200 | C-2V |
| CM509 | 24.0 | .18 | 2.6 | 1,000 | C-2V |
| CM303 | 28.0 | .30 | 6.0 | 500 | C-2F |
| CM623 | 28.0 | .37 | 6.0 | 1,000 | 2C-2V |
| CM1251 | 28.0 | .23 | 3.0 | 2,000 | 2C-2V |
| CM1223 | 32.0 | .16 | 3.8 | 200 | C-2V |

G-6 1/2 Double Contact Bayonet Base

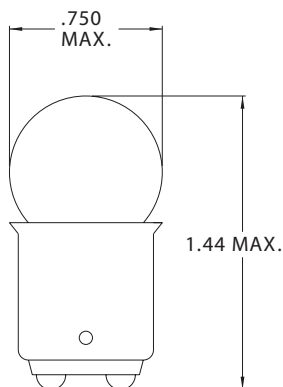

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM82 | 6.5 | 1.02 | 6.0 | 500 | C-2R |
| CM83 | 6.5 | 1.15 | 6.0 | 1,200 | C-2R |
| CM1314 | 6.5 | 1.02 | 6.0 | 500 | C-2R |
| CM64 | 7.0 | .63 | 3.0 | 1,000 | C-2R |
| CM90 | 13.0 | .58 | 6.0 | 750 | C-2R |
| CM99 | 13.0 | .62 | 6.0 | 800 | C-2V |
| CM68 | 13.5 | .59 | 4.0 | 5,000 | C-2R |
| CM96 | 13.5 | .69 | 4.0 | 5,000 | C-2V |
| CM1178 | 13.5 | .69 | 4.0 | 5,000 | C-2V |
| CM632 | 14.0 | .63 | 6.0 | 1,000 | 2C-2R |
| CM72 | 22.0 | .18 | 3.0 | 200 | C-2V |
| CM304 | 28.0 | .30 | 6.0 | 500 | C-2F |
| CM624 | 28.0 | .37 | 6.0 | 1,000 | 2C-2V |
| CM1252 | 28.0 | .23 | 3.0 | 2,000 | 2C-2V |
| CM1224 | 32.0 | .16 | 3.8 | 200 | C-2F |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Lamps](#) category:

Click to view products by [Visual Communications Company](#) manufacturer:

Other Similar products are found below :

[5AB](#) [6180](#) [8111](#) [8623](#) [912](#) [120PS](#) [1224](#) [DE603](#) [DW50](#) [IFL-LX2162-16T](#) [C9A](#) [C9A](#) [3015](#) [303](#) [19](#) [PR13](#) [268](#) [GT-NE6H1225T](#)
[CM5004WW](#) [32-2211T](#) [323](#) [509K](#) [5314N1](#) [5314N2](#) [WWT1-EW10/GRN](#) [4925H1](#) [DW07](#) [10C7DC-120V](#) [1141](#) [MS25231-313](#) [E73](#) [CM2](#)
[7683EBP](#) [8553](#) [XE135B](#) [WWT2-EW34BLA](#) [6S6/30V](#) [7367](#) [1301910036](#) [7A1H](#) [8630FBBB](#) [85](#) [106](#) [105](#) [BGF717-UV1](#) [1974D](#) [1495](#) [373](#)
[400](#) [502](#)