

# EPIC® H-B 24 Housings

Housing style H-B. The industry standard.



## H-B 24 TGB

### Suitable inserts:


- EPIC® H-BVE 10 see page 454
- EPIC® H-DD 108 see page 441
- EPIC® H-EE 46 see page 450
- EPIC® MCR 24 see page 462
- EPIC® H-D 64 see page 439
- EPIC® H-BE 24 Screw termination see page 446
- EPIC® H-BE 24 Crimp termination see page 446
- EPIC® H-BE 24 Cage clamp see page 446



## H-B 24 TGBH



## H-B 24 TS

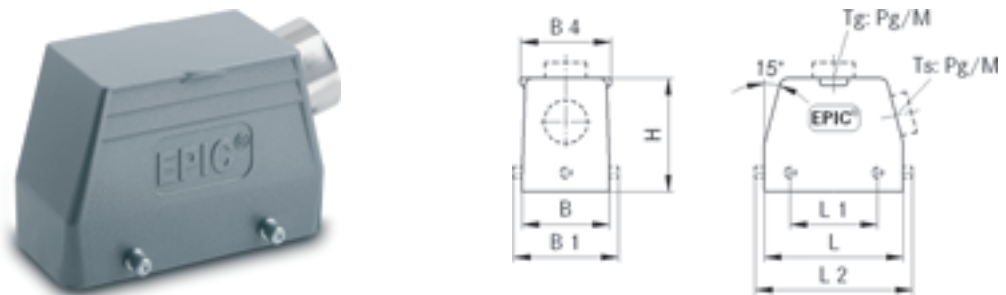

Part number	Part	PG	M	ZW	L	L1	B	B1	B2	H	s
<b>H-B housing: Hood (straight cable entry, double lever)</b>											
10122000	H-B 24 TGB 21	21		yes	120	74	43	57,8	53	61	163
10112000	H-B 24 TGB 29	29		yes	120	74	43	57,8	53	61	163
19122000	H-B 24 TGB M25		25		120	74	43	57,8	53	61	163
19112000	H-B 24 TGB M32		32		120	74	43	57,8	53	61	163
<b>H-B housing: Hood (straight cable entry, double lever, high version)</b>											
70155400	H-B 24 TGBH 21	21		yes	120	74	43	57,8	53	76	163
70155600	H-B 24 TGBH 29	29		yes	120	74	43	57,8	53	76	163
79155400	H-B 24 TGBH M25		25		120	74	43	57,8	53	76	163
79155600	H-B 24 TGBH M32		32		120	74	43	57,8	53	76	163
<b>H-B housing: Hood (side cable entry, bolts for double lever)</b>											
10113000	H-B 24 TS 21	21		yes	120	74	43	57,8		61	
10123000	H-B 24 TS 29	29		yes	120	74	43	57,8		61	
19113000	H-B 24 TS M25		25	yes	120	74	43	57,8		61	
19123000	H-B 24 TS M32		32	yes	120	74	43	57,8		61	

# EPIC® H-B 24 Housings


Housing style H-B. The industry standard.




## H-B 24 AG-LB

### Suitable inserts:


- EPIC® H-BVE 10 see page 454
- EPIC® H-DD 108 see page 441
- EPIC® H-EE 46 see page 450
- EPIC® MCR 24 see page 462
- EPIC® H-D 64 see page 439
- EPIC® H-BE 24 Screw termination see page 446
- EPIC® H-BE 24 Crimp termination see page 446
- EPIC® H-BE 24 Cage clamp see page 446

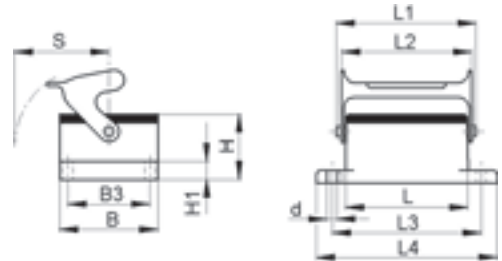

## H-B 24 AD-LB

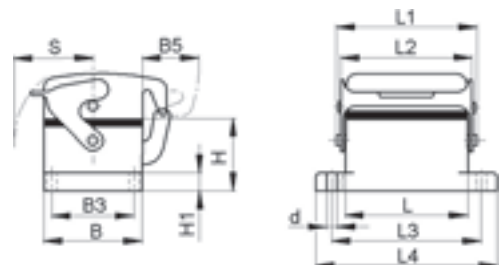

## H-B 24 AG

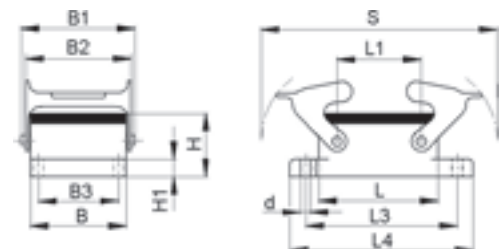

Part number	Part	L	L1	I2	L3	L4	B	B1	B2	B3	B5	H	H1	s	d
<b>H-B housing: Panel mount base (single lever)</b>															
10102900	H-B 24 AG-LB	120	138	136,5	130	140	43			32		27,8	4	50	4,3
<b>H-B housing: Panel mount base (cover, single lever)</b>															
10103900	H-B 24 AD-LB	120	138	136,5	130	140	43			32	25	27,8	4	50	4,3
<b>H-B housing: Panel mount base (double lever)</b>															
10102000	H-B 24 AG	120	74		130	140	43	57,8	53	32		27,8	4	163	4,3

# EPIC® H-BE Inserts

The standard inserts with screw termination, crimp termination and cage clamp termination




## H-BE 24 screw termination

The characteristic qualities of the proven EPIC® H-BE series are their suitability for applications with high voltages and current as well as their high reliability.

Ranges of application:


From machine building to control cabinet manufacturing, Light & Sound, polymer engineering

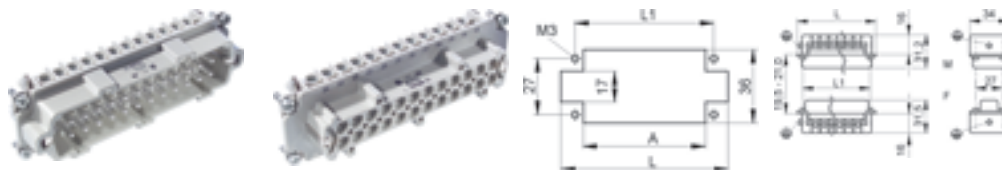

## Suitable housing:

EPIC® H-B 24 Housings see page 510

## H-BE 24 crimp termination

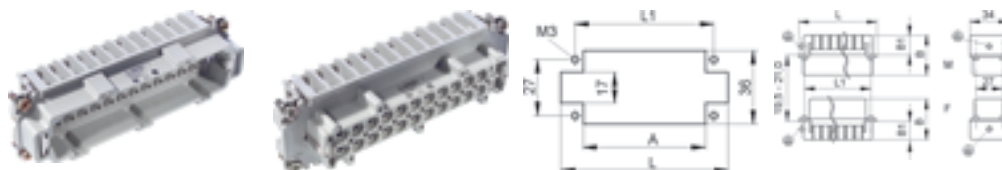


## Suitable housing:

EPIC® H-B 24 Housings see page 510

## Suitable contacts:

EPIC® H-BE 2,5 machined contacts see page 466

## H-BE 24 cage clamp

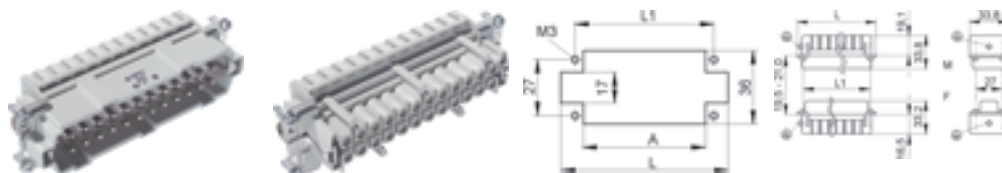

## Suitable housing:

EPIC® H-B 24 Housings see page 510

## Technical Data

Rated voltage  
IEC: 500 V  
UL: 600 V  
CSA: 600 V

Rated impulse Voltage  
6 kV

Rated current  
IEC: 16 A  
UL: 16 A  
CSA: 16 A

Pollution degree  
3

Contact resistance  
EPIC® H-BE 24 Screw termination  
< 2 mOhm  
EPIC® H-BE 24 Crimp termination  
< 2 mOhm  
EPIC® H-BE 24 Cage clamp  
1.5 - 4 mOhm

Contacts  
EPIC® H-BE 24 Screw termination  
Copper alloy, hard silver plated  
EPIC® H-BE 24 Crimp termination  
Copper alloy, hard silver / gold plated  
EPIC® H-BE 24 Cage clamp  
Copper alloy, hard silver plated

Numbers of contacts  
24 + PE

Termination methods  
EPIC® H-BE 24 Screw termination  
Screw termination: 0.5 - 2.5 mm<sup>2</sup>  
EPIC® H-BE 24 Crimp termination  
Crimp termination: 0.5 - 4.0 mm<sup>2</sup>  
EPIC® H-BE 24 Cage clamp  
Cage clamp termination: 0.5 - 2.5 mm<sup>2</sup>

Cycle of mechanical operation  
100


Range of temperature  
-40°C - +100°C, temporary up to +125°C

Part number	Part	Version	Type	Wire protection	Contacts	L	L1	A	B	B1
<b>H-BE 24 screw termination</b>										
10196000	H-BE 24 SS	male		yes	1 - 24	111	104	98		
10197000	H-BE 24 BS	female		yes	1 - 24	111	104	98		
10196100	H-BE 24 SS	male			1 - 24	111	104	98		
10197100	H-BE 24 BS	female			1 - 24	111	104	98		
<b>H-BE 24 crimp termination</b>										
10186000	H-BE 24 SCM	male	machined		1 - 24	111	104	98	33	18
10187000	H-BE 24 BCM	female	machined		1 - 24	111	104	98	33	18
<b>H-BE 24 cage clamp termination</b>										
10400300	H-BE 24 SF	male			1 - 24	109,8	104	98		
10401300	H-BE 24 BF	female			1 - 24	109,8	104	98		

VDE approval is not valid for applications using the cage clamp termination

# 5.1 EPIC® CERTOSA M & PG

Kabelverschraubungen metrisch / Cable glands metric thread / Presse-étoupes pas métrique

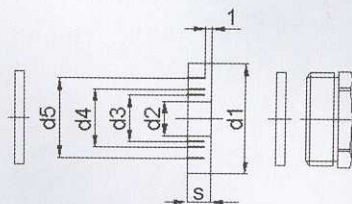


## EPIC® SM-M

Artikel part article	Art.Nr. part No. N° art.	M	d1	d2	Kabel Ø cable Ø câble Ø	d3	Kabel Ø cable Ø câble Ø	d4	Kabel Ø cable Ø câble Ø	d5	Kabel Ø cable Ø câble Ø	S	SW mm opening of the spanner ouverture de clef	VPE packing unit condition- nement
SM-M12	71200000	12	10	5	4-6							5	12	5
SM-M16	71200100	16	13,8	3	2-4	6	5-7	9	8-10			5,5	16	5
SM-M20	71200200	20	13,9	4	3-5	7	6-8	10	9-11	13	12-13,5	6	20	5
SM-M25	71200300	25	22,6	8,5	7,5-9,5	11,5	10,5-12,5	14,5	13,5-15,5	17,5	16,5-18,5	7,5	25	5
SM-M32	71200400	32	29,6	16	15-17	19	18-20	22	21-23	25	24-26	9,5	32	5
SM-M40	71200500	40	37,6	23	22-24	26	25-27	29	28-30	32	31-33	12	40	5
SM-M50	71200600	50	47,6	30	29-31	33	32-34	36	35-37	39	38-40	14	50	5

Material / material / matière: Metall, Messing vernickelt / metal, brass, nickel plated / métallique, laiton nickelage

Schutzart / protection class / degré de protection: IP 65 (EN60529)

Temperaturbereich / temperature range / gamme de température: -40 °C bis +80 °C

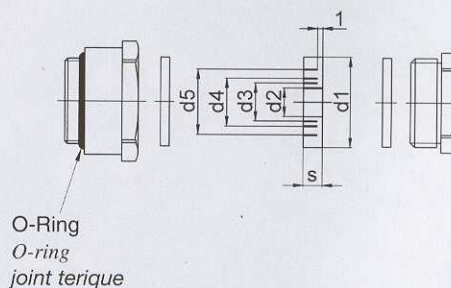

## EPIC® CM-M

Artikel part article	Art.Nr. part No. N° art.	M	d1	d2	Kabel Ø cable Ø câble Ø	d3	Kabel Ø cable Ø câble Ø	d4	Kabel Ø cable Ø câble Ø	d5	Kabel Ø cable Ø câble Ø	S	SW mm opening of the spanner ouverture de clef	VPE packing unit condition- nement
CM-M12	71201000	12	10	5	4-6							5	15	5
CM-M16	71201100	16	13,8	3	2-4	6	5-7	9	8-10			5,5	19	5
CM-M20	71201200	20	13,9	4	3-5	7	6-8	10	9-11	13	12-13,5	6	23	5
CM-M25	71201300	25	22,6	8,5	7,5-9,5	11,5	10-12,5	14,5	13,5-15,5	17,5	16,5-18,5	7,5	28	5
CM-M32	71201400	32	29,6	16	15-17	19	18-20	22	21-23	25	24-26	9,5	36	5
CM-M40	71201500	40	37,6	23	22-24	26	25-27	29	28-30	32	31-33	12	46	5
CM-M50	71201600	50	47,6	30	29-31	33	32-34	36	35-37	39	38-40	14	55	5

Material / material / matière: Metall, Messing vernickelt / metal, brass, nickel plated / métallique, laiton nickelage

Schutzart / protection class / degré de protection: IP 65 (EN60529)

Temperaturbereich / temperature range / gamme de température: -40 °C bis +80 °C

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [epic manufacturer](#):*

Other Similar products are found below :

[44420040 + 73002716](#) [19426500](#) [72004000 + 73018000](#) [13.1623](#) [11161000](#) [11.1610](#) [9198+00022030](#) [72004000 + 73002756](#) [72000010](#)  
[10.5310](#) [10.4264+10.4310](#) [72040010](#) [HA4-FK-TE-SM-M-M20](#) [10.4310](#) [8883+00022030](#) [10.1270+10.1970+12.9545](#) [10.4220+10.4320](#)  
[10.4265+10.4235+10.4200+10.4210](#) [10121000+10196000+12954500](#) [10.0720](#) [44420037 + 73002752](#) [10102000](#) [10.4264](#) [72004000 +](#)  
[73002716](#) [8990+00022030](#) [44420037 + 73018000](#) [10.1210+10.1960+12.9545](#) [10.4881](#) [10431000](#) [10.1920](#)  
[10.0220+10.0030+10.1900+10.1910+12.9544](#) [44420037 + 73028500](#) [10.4861](#) [13.1622](#) [44420037 + 73002716](#) [10.1900](#)