


High Ohmic Flat Chip Resistors



OCT 0603 and OCU 0805 high ohmic flat chip resistors are best suited where high resistance, high stability and high reliability are required. Typical applications include any kind of battery driven electronics, particularly low consumption CMOS circuitry.

FEATURES

- Unique very high ohmic chip resistor product
- Standard TCR: ± 100 ppm/K
- Excellent overall stability
- Low voltage coefficient: 0.05 %/V
- Wide high ohmic range: > 10 M Ω to 130 M Ω
- Lead (Pb)-free solder contacts
- Compliant to RoHS directive 2002/95/EC



APPLICATIONS

- Any kind of battery driven electronics
- Low consumption CMOS circuitry
- Small signal measurement

METRIC SIZE

	0603	0805
INCH:	0603	0805
METRIC:	RR 1608M	RR 2012M

TECHNICAL SPECIFICATIONS

DESCRIPTION	OCT 0603		OCU 0805		
Metric size	RR 1608M		RR 2012M		
Resistance range	11 M Ω to 130 M Ω		11 M Ω to 130 M Ω		
Resistance tolerance	± 5 %				
Temperature coefficient	± 250 ppm/K; ± 100 ppm/K				
Operation mode	Standard	Power	Standard	Power	
Climatic category (LCT/UCT/days)	55/125/56	55/155/56	55/125/56	55/155/56	
Rated dissipation, P_{70} ⁽¹⁾	Limited by U_{max} .				
Operating voltage, U_{max} . AC/DC	75 V	150 V	150 V	200 V	
Film temperature	125 °C	155 °C	125 °C	155 °C	
Max. resistance change at P_{70} for resistance range, $ \Delta R/R $ max., after:	11 M Ω to 47 M Ω		11 M Ω to 47 M Ω		
	1000 h	≤ 1 %	≤ 2 %	≤ 1 %	≤ 2 %
	8000 h	≤ 2 %	≤ 4 %	≤ 2 %	≤ 4 %
Specified lifetime	8000 h				
Insulation voltage:	1 min; U_{ins}	100 V	200 V		
	Continuous	75 V	75 V		
Failure rate: FIT _{observed}	$\leq 0.1 \times 10^{-9}/h$				

Note

⁽¹⁾ The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature is not exceeded.



PART NUMBER AND PRODUCT DESCRIPTION (1)																	
PART NUMBER: OCT06030B5106JP500																	
O	C	T	0	6	0	3	0	B	5	1	0	6	J	P	5	0	0
MODEL/SIZE OCT0603 OCU0805	SPECIAL CHARACTER 0 = Neutral		TCR B = ± 100 ppm/K W = ± 250 ppm/K		VALUE 3 digit value 1 digit multiplier MULTIPLIER 5 = *10 ⁵ 6 = *10 ⁶		TOLERANCE J = ± 5 %		PACKAGING (2) P5 PW		SPECIAL Up to 2 digits 00 = Standard						
PRODUCT DESCRIPTION: OCT 0603 -100 5% P5 51M																	
OCT	0603	-100	5 %	P5	51M												
MODEL OCT OCU	SIZE 0603 0805	TCR ± 100 ppm/K ± 250 ppm/K	TOLERANCE ± 5 %	PACKAGING (2) P5 PW	RESISTANCE VALUE 47M = 47 MΩ 220M = 220 MΩ												

Notes

(1) Products can be ordered using either the PRODUCT DESCRIPTION or the PART NUMBER

(2) Please refer to table PACKAGING, below


TEMPERATURE COEFFICIENT AND RESISTANCE RANGE			
DESCRIPTION		RESISTANCE VALUE (3)	
TCR	TOLERANCE	OCT 0603	OCU 0805
± 250 ppm/K	± 5 %	51 MΩ to 130 MΩ	51 MΩ to 130 MΩ
± 100 ppm/K	± 5 %	11 MΩ to 47 MΩ	11 MΩ to 47 MΩ

Note

(3) Resistance values to be selected from E24 series


PACKAGING		
MODEL	REEL	
	PIECES/ PAPER TAPE ON REEL	CODE
OCT 0603	5000	P5
	20 000	PW
OCU 0805	5000	P5
	20 000	PW

DIMENSIONS

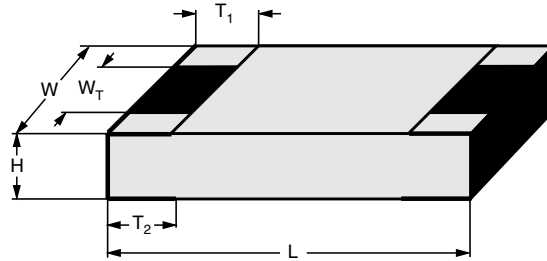

DIMENSIONS AND MASS							
TYPE	H (mm)	L (mm)	W (mm)	WT (mm)	T1 (mm)	T2 (mm)	MASS (mg)
OCT 0603	0.45 + 0.1/- 0.05	1.55 ± 0.05	0.85 ± 0.1	> 75 % of W	0.3 + 0.15/- 0.2	0.3 + 0.15/- 0.2	1.9
OCU 0805	0.45 + 0.1/- 0.05	2.0 ± 0.1	1.25 ± 0.15	> 75 % of W	0.4 + 0.1/- 0.2	0.4 + 0.1/- 0.2	4.6

SOLDER PAD DIMENSIONS

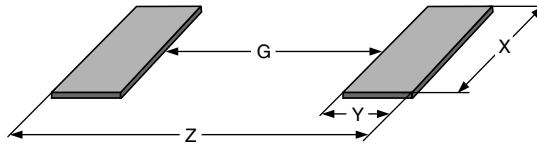

RECOMMENDED SOLDER PAD DIMENSIONS								
TYPE	WAVE SOLDERING				REFLOW SOLDERING			
	G (mm)	Y (mm)	X (mm)	Z (mm)	G (mm)	Y (mm)	X (mm)	Z (mm)
OCT 0603	0.55	1.10	1.10	2.75	0.65	0.70	0.95	2.05
OCU 0805	0.80	1.25	1.50	3.30	0.90	0.90	1.40	2.70

Note

- The rated dissipation applies only if the permitted film temperature is not exceeded. Furthermore, a high level of ambient temperature or of power dissipation may raise the temperature of the solder joint, hence special solder alloys or board materials may be required to maintain the reliability of the assembly.
Specified power rating above 125 °C requires dedicated heat-sink pads, which depend on board materials.
The given solder pad dimensions reflect the considerations for board design and assembly as outlined e.g. in standards IEC 61188-5-x, or in publication IPC-7351. They do not guarantee any supposed thermal properties, particularly as these are also strongly influenced by many other parameters.
Still, the given solder pad dimensions will be found adequate for most general applications, e.g. those referring to “standard operation mode”. Please note however that applications for “power operation mode” require special considerations for the design of solder pads and adjacent conductor areas.

DESCRIPTION

Production is strictly controlled and follows an extensive set of instructions established for reproducibility. A newly developed cermet layer is deposited on a high grade (Al₂O₃) ceramic substrate and conditioned to achieve the desired temperature coefficient. Inner contacts are built on both sides of the substrate. A special laser is used to achieve the target value by smoothly cutting the resistive layer without damaging the ceramics. The resistor elements are covered by a protective coating designed for electrical, mechanical and climatic protection. The terminations receive a final pure tin on nickel plating.

The result of the determined production is verified by an extensive testing procedure and optical inspection performed on 100 % of the individual chip resistors. Only accepted products are laid directly into the paper tape in accordance with **IEC 60286-3** ⁽³⁾.

ASSEMBLY

The resistors are suitable for processing on automatic SMD assembly systems. They are suitable for automatic soldering using wave, reflow or vapour phase as shown in **IEC 61760-1** ⁽³⁾. The encapsulation is resistant to all cleaning solvents commonly used in the electronics industry, including alcohols, esters and aqueous solutions. The suitability of conformal coatings, if applied, shall be qualified by appropriate means to ensure the long-term stability of the whole system.

The resistors are RoHS compliant; the pure tin plating provides compatibility with lead (Pb)-free and lead-containing soldering processes. Solderability is specified for 2 years after production or requalification. The permitted storage time is 20 years. The immunity of the plating against tin whisker growth has been proven under extensive testing.

All products comply with the **GADSL** ⁽¹⁾ and the **CEFIC-EECA-EICTA** ⁽²⁾ list of legal restrictions on hazardous substances. This includes full compliance with the following directives:

- 2000/53/EC End of Vehicle life Directive (ELV) and Annex II (ELV II)
- 2002/95/EC Restriction of the use of Hazardous Substances directive (RoHS)
- 2002/96/EC Waste Electrical and Electronic Equipment Directive (WEEE)

APPROVALS

The resistors are tested in accordance with **EN 140401-802** which refers to **EN 60115-1** and **EN 140400**. The detail specification refers to the climatic category 55/125/56, which relates to the "Standard operation mode" of this datasheet.

Vishay BEYSCHLAG has achieved "Approval of Manufacturer" in accordance with **EN 100114-1**.

Notes

⁽¹⁾ Global Automotive Declarable Substance List, see www.gadsl.org

⁽²⁾ CEFIC (European Chemical Industry Council), EECA (European Electronic Component Manufacturers Association), EICTA (European trade organisation representing the information and communications technology and consumer electronics), see www.eicta.org/index.php?id=995
→ issue → environment policy → chemicals → chemicals for electronics

⁽³⁾ The quoted IEC standards are also released as EN standards with the same number and identical contents

TESTS AND REQUIREMENTS

All tests are carried out in accordance with the following specifications:

EN 60115-1, generic specification (includes tests)

EN 140400, sectional specification (includes schedule for qualification approval)

EN 140401-802, detail specification (includes schedule for conformance inspection)

The components are approved in accordance with the European CECC-system, where applicable. The following table contains only the most important tests. For the full test schedule refer to the documents listed above. The testing also covers most of the requirements specified by EIA/IS-703 and JIS-C-5202.

The tests are carried out in accordance with IEC 60068 and under standard atmospheric conditions in accordance with IEC 60068-1, 5.3. Climatic category LCT/UCT/56 (rated

temperature range: Lower category temperature, upper category temperature; damp heat, long term, 56 days) is valid.

Unless otherwise specified the following values apply:

Temperature: 15 °C to 35 °C

Relative humidity: 45 % to 75 %

Air pressure: 86 kPa to 106 kPa (860 mbar to 1060 mbar).

The components are mounted for testing on boards in accordance with EN 60115-1, 4.31 unless otherwise specified.

The requirements stated in the Test Procedures and Requirements table are based on the required tests and permitted limits of EN 140401-802. However, some additional tests and a number of improvements against those minimum requirements have been included.

TEST PROCEDURES AND REQUIREMENTS				
EN 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE ($\Delta R/R$)
			Stability for product types:	
			OCT 0603	11 M Ω to 130 M Ω
			OCU 0805	11 M Ω to 130 M Ω
4.5	-	Resistance	$U = 100 \text{ V}$	$\pm 5 \%$
4.8.4.2	-	Temperature coefficient	At (20/- 55/20) °C and (20/125/20) °C	$\pm 250 \text{ ppm/K}$; $\pm 100 \text{ ppm/K}$
4.25.1	-	Endurance at 70 °C: Standard operation mode	$U = U_{\text{max}}$; 1.5 h on; 0.5 h off; 70 °C; 1000 h 70 °C; 8000 h	$\pm 1 \%$ $\pm 2 \%$
4.25.3	-	Endurance at upper category temperature	125 °C; 1000 h 155 °C; 1000 h	$\pm 2 \%$ $\pm 3 \%$
4.24	78 (Cab)	Damp heat, steady state	(40 \pm 2) °C; 56 days; (93 \pm 3) % RH	$\pm 1 \%$
4.23		Climatic sequence:		
4.23.2	2 (Ba)	dry heat	UCT; 16 h	
4.23.3	30 (Db)	damp heat, cyclic	55 °C; 24 h; > 90 % RH; 1 cycle	
4.23.4	1 (Aa)	cold	LCT; 2 h	
4.23.5	13 (M)	low air pressure	8.5 kPa; 2 h; (25 \pm 10) °C	
4.23.6	30 (Db)	damp heat, cyclic	55 °C; 5 days; > 95 to 100 % RH; 5 cycles LCT = - 55 °C; UCT = 125 °C	$\pm 1 \%$ no visible damage

TEST PROCEDURES AND REQUIREMENTS				
EN 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE ($\Delta R/R$)
			Stability for product types:	
			OCT 0603	11 M Ω to 130 M Ω
			OCU 0805	11 M Ω to 130 M Ω
-	1 (Aa)	Cold	- 55 °C; 2 h	$\pm 0.5 \%$
4.19	14 (Na)	Rapid change of temperature	30 min at LCT and 30 min at UCT; LCT = - 55 °C; UCT = 125 °C; 5 cycles LCT = - 55 °C; UCT = 125 °C; 1000 cycles	$\pm 0.5 \%$ no visible damage $\pm 1 \%$ no visible damage
4.13	-	Short time overload	$U = 2 \times U_{max.}$; 5 s	$\pm 0.5 \%$
4.27	-	Single pulse high voltage overload; standard operation mode	Severity no. 4, $U = 2 \times U_{max.}$; 10 pulses 10 μ s/700 μ s	$\pm 1 \%$ no visible damage
4.22	6 (Fc)	Vibration	Endurance by sweeping; 10 Hz to 2000 Hz; no resonance; amplitude ≤ 1.5 mm or ≤ 200 m/s ² ; 6 h	$\pm 0.5 \%$ no visible damage
4.17.2	58 (Td)	Solderability	Solder bath method; SnPb40; non-activated flux (215 \pm 3) °C; (3 \pm 0.3) s Solder bath method; SnAg3Cu0.5 or SnAg3.5; non-activated flux (235 \pm 3) °C; (2 \pm 0.2) s	Good tinning (> 95 % covered); no visible damage
4.18.2	58 (Td)	Resistance to soldering heat	Solder bath method; (260 \pm 5) °C; (10 \pm 1) s	$\pm 0.5 \%$ no visible damage
4.29	45 (XA)	Component solvent resistance	Isopropyl alcohol + 50 °C; method 2	No visible damage
4.32	21 (Ue ₃)	Shear (adhesion)	RR 1608M; 9 N RR 2012M; 45 N	No visible damage
4.33	21 (Ue ₁)	Substrate bending	Depth 2 mm, 3 times	$\pm 0.5 \%$ no visible damage, no open circuit in bent position
4.7	-	Voltage proof	$U_{RMS} = U_{ins.}$; (60 \pm 5) s	No flashover or breakdown
4.35	-	Flammability	IEC 60695-2-2, needle flame test; 10 s	No burning after 30 s

12NC INFORMATION FOR HISTORICAL CODING REFERENCE ONLY

- The resistors have a 12 digit numeric code starting with 2312.
- The subsequent 4 digits indicate the resistor type, specification and packaging; see the 12NC table.
- The remaining 4 digits indicate the resistance value:
 - The first 3 digits indicate the resistance value.
 - The last digit indicates the resistance decade in accordance with the 12NC indicating resistance decade table.

Last digit of 12NC indicating resistance decade

RESISTANCE DECADE	LAST DIGIT
10 MΩ to 99.9 MΩ	6

Last Two Digits Indicating Sequential Code Number

RESISTANCE VALUE	LAST DIGITS
100 MΩ	01
110 MΩ	02
120 MΩ	03
130 MΩ	04

12NC example

The 12NC of a OCT 0603 resistor, value 51 MΩ and TC 250 with ± 5 % tolerance, supplied in cardboard tape of 20000 units per reel is: 2312 209 35106.

The 12 NC of a OCT 0603 resistor, value 130 MΩ and TC 250 with ± 5 % tolerance, supplied in cardboard tape of 5000 units per reel is: 2312 219 90104.

12NC - Resistor type and packaging					
DESCRIPTION				CODE 2312	
				CARDBOARD TAPE ON REEL	
TYPE	TCR	TOL.	RESISTANCE VALUE	P5 5000 UNITS	PW 20 000 UNITS
OCT 0603	± 250 ppm/K	± 5 %	51 MΩ to 91 MΩ	219 3...	209 3....
			≥ 100 MΩ ⁽¹⁾	219 901..	209 901..
	± 100 ppm/K	± 5 %	11 MΩ to 47 MΩ	219 3...	209 3....
OCU 0805	± 250 ppm/K	± 5 %	51 MΩ to 91 MΩ	259 3...	249 3....
			≥ 100 MΩ ⁽¹⁾	259 901..	249 901..
	± 100 ppm/K	± 5 %	11 MΩ to 47 MΩ	259 3...	249 3....

Note

⁽¹⁾Readable coding of resistance values is restricted to values below 100 MΩ. For resistance values from 100 MΩ onwards, refer to the pre-defined table of non-readable sequential numbers above.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - SMD category](#):

Click to view products by [Vishay manufacturer](#):

Other Similar products are found below :

[CRCW04028R20JNEE](#) [CRCW06036K80FKEE](#) [CRG1206F1K58](#) [CRL0603-FW-R700ELF](#) [M55342K06B6E19RWL](#) [RC1005F1072CS](#)
[RC1005F471CS](#) [RC1005F4751CS](#) [RCP0603W100RGED](#) [ERJ-1GMF1R00C](#) [ERJ-1GMF1R20C](#) [ERJ-1GMF2R55C](#) [ERJ-1GMF8R66C](#)
[25121WF1003T4E](#) [25.501.3653.0](#) [290-1.0M-RC](#) [292-1.0M-RC](#) [292-2.2K-RC](#) [292-4.7K-RC](#) [25121WF4700T4E](#) [292-470K-RC](#) [302-1.0M-](#)
[RC](#) [CPG1206F10KC](#) [CRCW02011R00FXED](#) [CRCW060315K0FKEE](#) [CRCW060320K5FKEE](#) [CRG0201F10K](#) [RCP2512B100RGWB](#)
[RCWP12061K00FKS2](#) [3520510RJT](#) [352075KJT](#) [M55342K11B9E53RUL](#) [RMC16-102JT](#) [RMC1JPTE](#) [TR0603MR-075K1L](#) [5-2176094-4](#)
[35202K7JT](#) [WF06Q1000FTL](#) [ERJ-S14J4R7U](#) [CHP2512L4R30GNT](#) [WR12X1621FTL](#) [RCWP11001K00FKS3](#) [LRC-LRF3W-01-R050-](#)
[FTR1800](#) [9-2176088-6](#) [NRC06F1002TR20F](#) [CRCW02013M30FNED](#) [CRCW060343K0FKEE](#) [WR04X5360FTL](#) [RCA060345K3FKEA](#)
[LTR100JZPF33R0](#)