

General Description

The WSD2018BDN22 is the highest performance trench N-Ch MOSFET with extreme high cell density, which provide excellent RDSON and gate charge for most of the small power switching and load switch applications.

The WSD2018BDN22 meet the RoHS and Green Product requirement with full function reliability approved.

Features

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent Cdv/dt effect decline
- Green Device Available


Product Summary

BVDSS	RDSON	ID
12V	11.5mΩ _(MAX)	12.3A

Applications

- High Frequency Point-of-Load Synchronous Small power switching for MB/NB/UMPC/VGA
- Networking DC-DC Power System
- Load Switch

DFNWB2×2-6L-J Pin Configuration

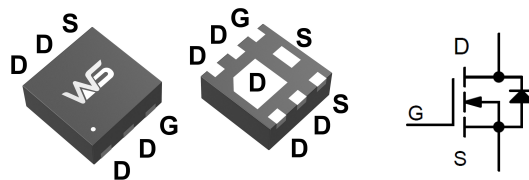

Absolute Maximum Ratings @TA=25°C unless otherwise noted

Symbol	Parameter	Ratings	Unit	
V _{DSS}	Drain-Source Voltage	12	V	
V _{GSS}	Gate-Source Voltage	±8	V	
I _D	Drain Current (Continuous) *C	TA=25°C	12.3	A
		TA=70°C	9.8	A
I _{DM}	Drain Current (Pulse) *B	49	A	
P _D	Power Dissipation TA=25°C	2.8	W	
T _J /T _{STG}	Operating Temperature/ Storage Temperature	-55~150	°C	

Thermal Resistance Ratings

Symbol	Parameter	Maximum	Unit	
R _{thJA}	Maximum Junction-to-Ambient *A	t ≤ 10 s	45	°C/W

Electrical Characteristics @ $T_A=25^{\circ}\text{C}$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Static *D						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A$	12	---	---	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 10V, V_{GS} = 0V$	---	---	1	μA
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{GS} = V_{DS}, I_{DS} = 250\mu A$	0.4	---	1	V
I_{GSS}	Gate Leakage Current	$V_{GS} = \pm 8V, V_{DS} = 0V$	---	---	± 100	nA
$R_{DS(on)}$	Drain-Source On-state Resistance	$V_{GS} = 4.5V, I_D = 8A$	---	8.6	11.5	m Ω
$R_{DS(on)}$		$V_{GS} = 2.5V, I_D = 4A$	---	12	18	m Ω
V_{SD}	Diode Forward Voltage	$I_{SD} = 1A, V_{GS} = 0V$	---	---	1	V
I_S	Diode Forward Current *C	$T_A = 25^{\circ}\text{C}$	---	---	2.8	A
Switching						
Q_g	Total Gate Charge	$V_{GS} = 4.5V, V_{DS} = 6V, I_D = 6.5A$	---	8.5	---	nC
Q_{gs}	Gate-Source Charge		---	1.5	---	nC
Q_{gd}	Gate-Drain Charge		---	2.2	---	nC
$t_{d(on)}$	Turn-on Delay Time	$V_{GS} = 4.5V, V_{DS} = 10V, R_L = 1.5, R_{GEN} = 3$	---	8	---	ns
t_r	Turn-on Rise Time		---	5	---	ns
$t_{d(off)}$	Turn-off Delay Time		---	14	---	ns
t_f	Turn-Off Fall Time		---	12	---	ns
Dynamic						
C_{iss}	Input Capacitance	$V_{GS} = 0V, V_{DS} = 6V, f = 1\text{MHz}$	---	850	---	pF
C_{oss}	Output Capacitance		---	180	---	pF
C_{riss}	Reverse Transfer Capacitance		---	95	---	pF

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in2 FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^{\circ}\text{C}$.

The value in any given application depends on the user's specific board design.

B: Repetitive rating, pulse width limited by junction temperature.

C: The current rating is based on the $t \leq 10s$ junction to ambient thermal resistance rating, package limited 8A.

D: Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.

Typical Characteristics

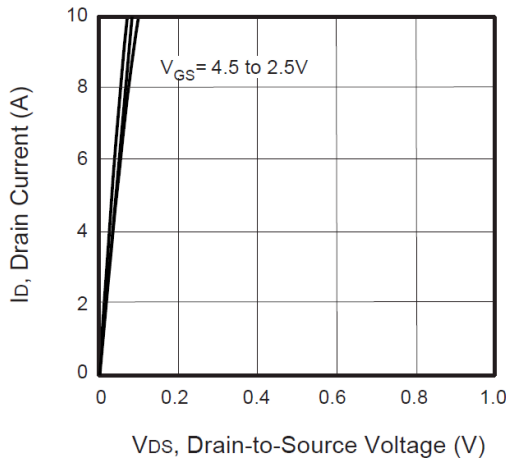


Figure 1. Output Characteristics

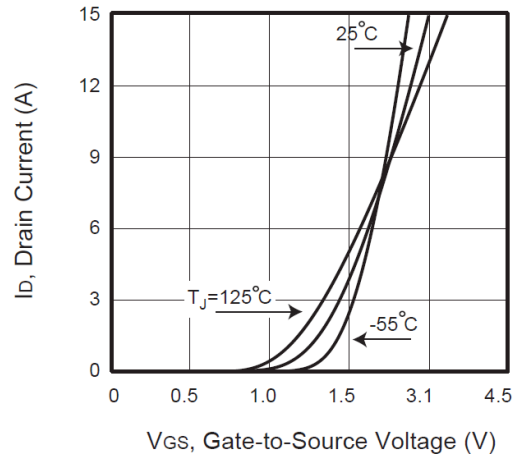


Figure 2. Transfer Characteristics

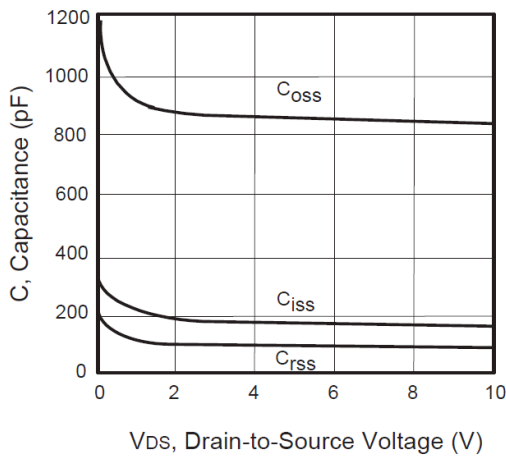


Figure 3. Capacitance

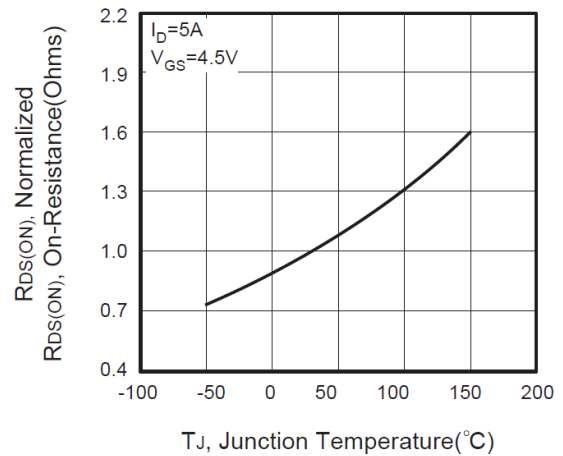


Figure 4. On-Resistance Variation with Temperature

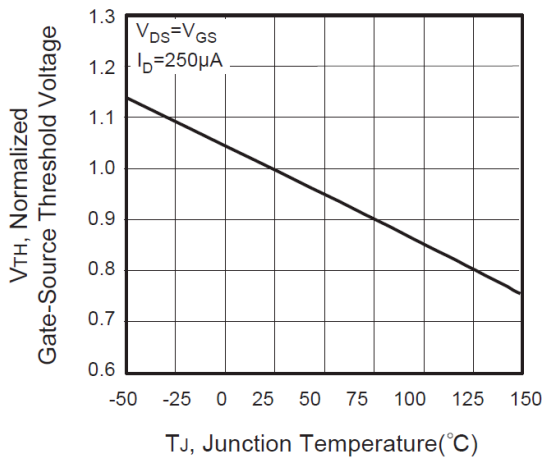


Figure 5. Gate Threshold Variation with Temperature

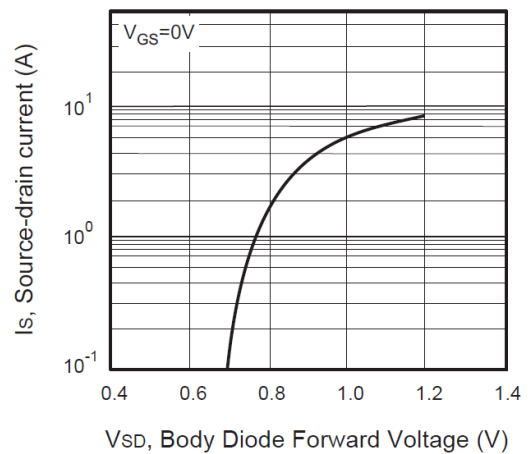


Figure 6. Body Diode Forward Voltage Variation with Source Current

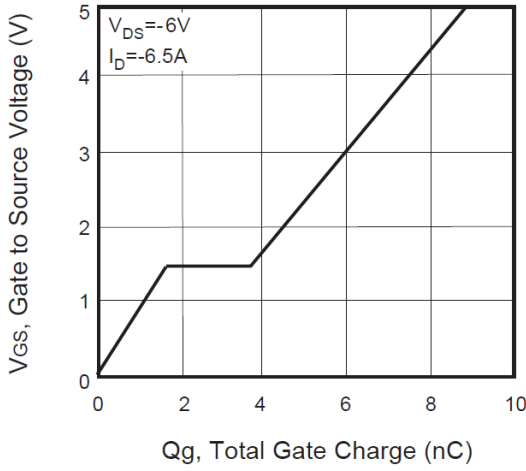


Figure 7. Gate Charge

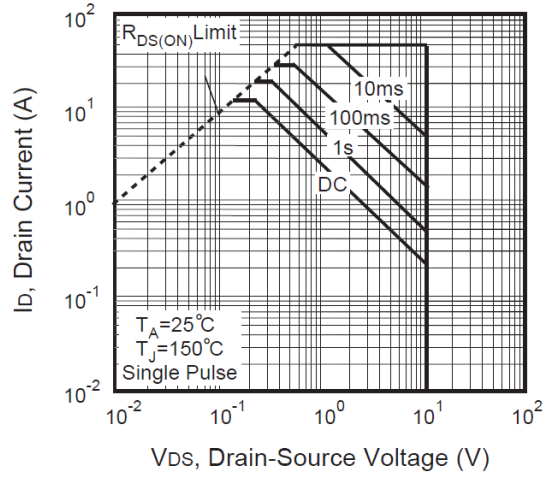


Figure 8. Maximum Safe Operating Area

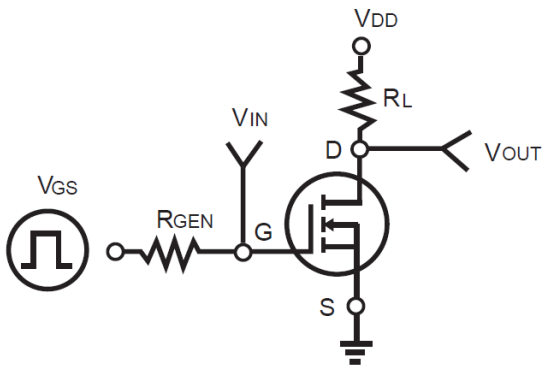


Figure 9. Switching Test Circuit

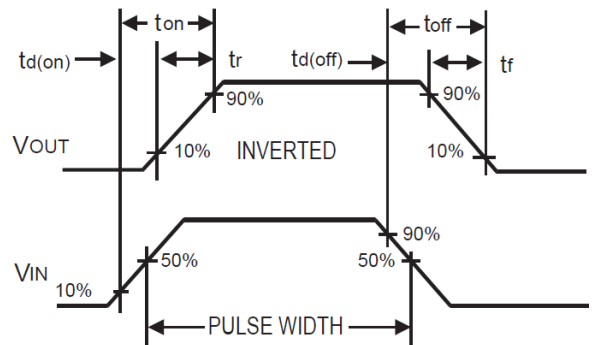


Figure 10. Switching Waveforms

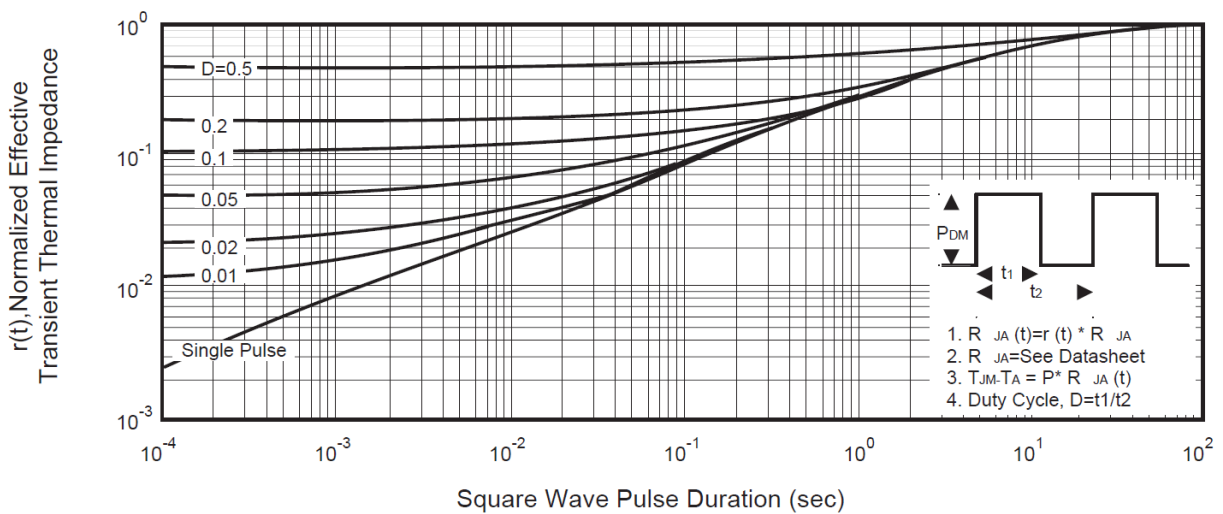
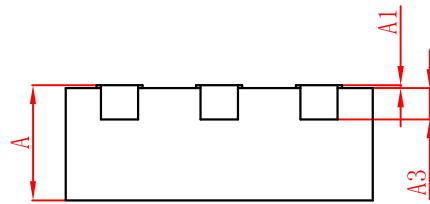
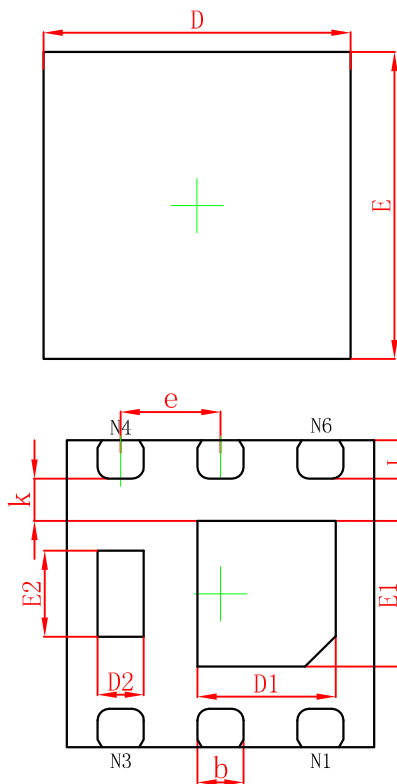
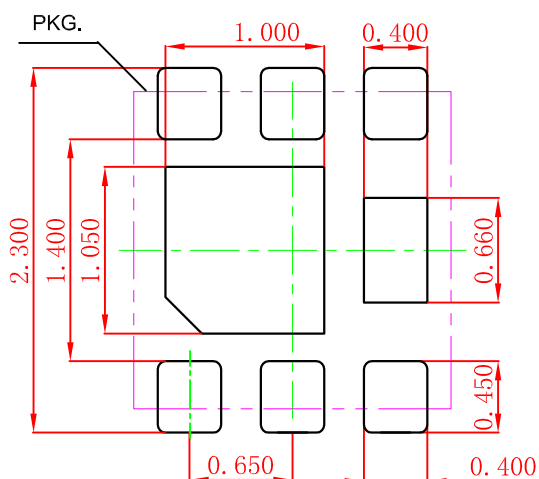


Figure 11. Normalized Thermal Transient Impedance Curve

DFNWB2X2-6L-J Package Outline Dimensions


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.800		0.032
A1	0.000	0.050	0.000	0.002
A3	0.203REF.		0.008REF.	
D	1.924	2.076	0.076	0.082
E	1.924	2.076	0.076	0.082
D1	0.800	1.000	0.031	0.039
E1	0.850	1.050	0.033	0.041
D2	0.200	0.400	0.008	0.016
E2	0.460	0.660	0.018	0.026
k	0.200MIN.		0.008MIN.	
b	0.250	0.350	0.010	0.014
e	0.650TYP.		0.026TYP.	
L	0.174	0.326	0.007	0.013

DFNWB2X2-6L-J Suggested Pad Layout


- Note:
1. Controlling dimension: in millimeters.
 2. General tolerance: ± 0.050 mm.
 3. The pad layout is for reference purposes only.



Attention

- 1, Any and all Winsok power products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your Winsok power representative nearest you before using any Winsok power products described or contained herein in such applications.
- 2, Winsok power assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Winsok power products described or contained herein.
- 3, Specifications of any and all Winsok power products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- 4, Winsok power Semiconductor CO., LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- 5, In the event that any or all Winsok power products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- 6, No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of Winsok power Semiconductor CO., LTD.
- 7, Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. Winsok power believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- 8, Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the Winsok power product that you intend to use.
- 9, this catalog provides information as of Sep. 2014. Specifications and information herein are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [Winsok](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [NTNS3A92PZT5G](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#)
[AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#)
[IPS70R2K0CEAKMA1](#) [BSF024N03LT3 G](#) [PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#)
[EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#)
[DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [IPSA70R950CEAKMA1](#) [IPSA70R2K0CEAKMA1](#) [STU5N65M6](#)
[C3M0021120D](#)