

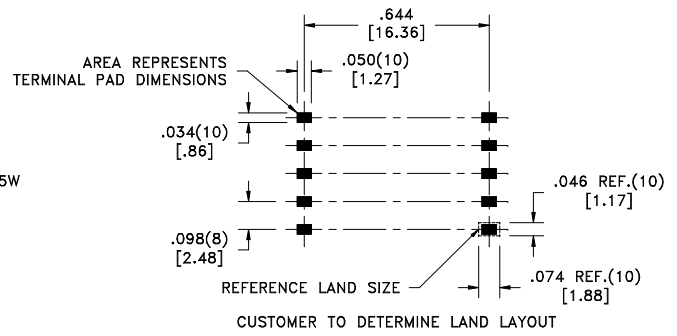



SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE (6B)
	Sn63%, Pb37%	No	No
LF1	Sn96%, Ag4%	Yes	Yes

more than you expect

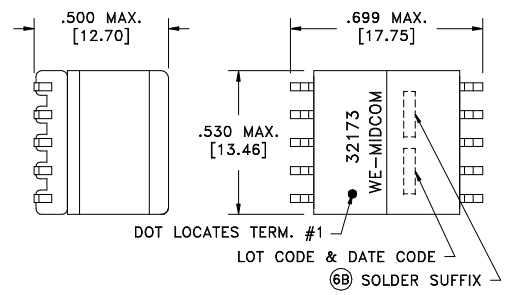

TERM. NO.'s FOR REF. ONLY



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.094 ohms max.
D.C. RESISTANCE	3-4 @20°C	0.460 ohms max.
D.C. RESISTANCE	7-9 tie(7+8, 9+10), @20°C	0.055 ohms max.
INDUCTANCE	3-4 10kHz, 100mVAC, Ls	127.0uH ±10%
LEAKAGE INDUCTANCE	3-4 tie(1+2, 7+8+9+10), 100kHz, 100mVAC, Ls	7.5uH max.
DIELECTRIC	1-10 tie(2+3, 7+8), 1500VAC, 1 second	-
DIELECTRIC	1-3 500VDC, 1 second	-
TURNS RATIO	(3-4):(7-9), tie(7+8, 9+10)	3.424:1, ±2%
TURNS RATIO	(3-4):(2-1)	4.807:1, ±2%

GENERAL SPECIFICATIONS:

Midcom p/n 32173R-LF1 is eiSos p/n: 750032173

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0499 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1°      Decimals: ±.005 [.13] Fractions: ±1/64      Footprint: ±.005 [.13]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>32173R/-LF1</b>
6B	2/12			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750032173	SPECIFICATION SHEET 1 OF 1
6A	6/05	SEE REVISION SHEET FOR REVISION LEVEL				



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Transformers](#) category:*

*Click to view products by [Würth](#) manufacturer:*

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)  
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)  
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)