
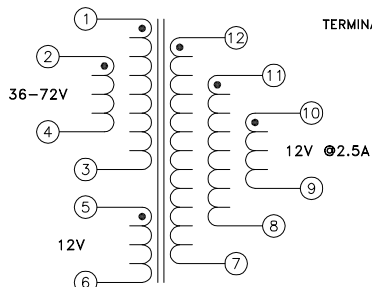



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

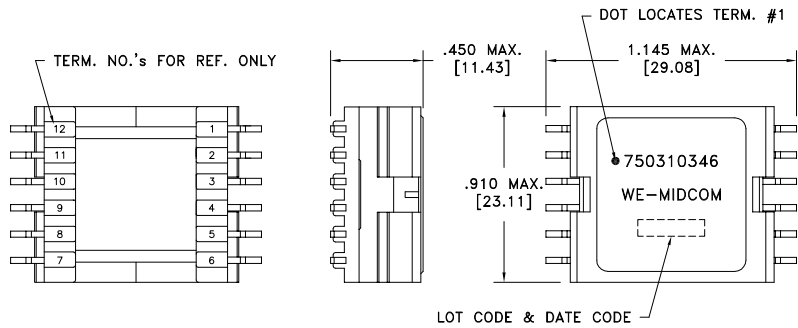

Application of the transformer allows for the following terminals to solder bridge: 1&2, 3&4, 10&11&12, and 7&8&9.

6B

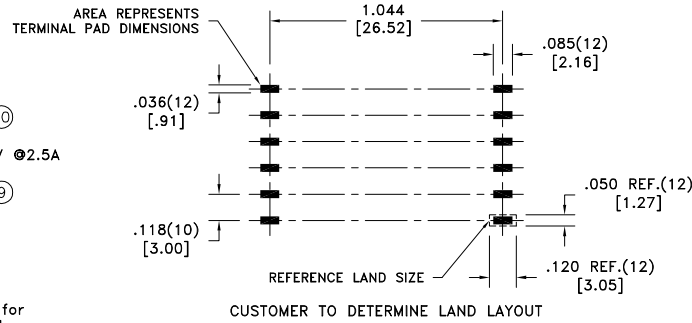


ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 tie(1+2, 3+4), @20°C	0.085 ohms ±20%
D.C. RESISTANCE	7-12 tie(7+8+9, 10+11+12), @20°C	0.0250 ohms ±20%
D.C. RESISTANCE	@20°C	0.245 ohms ±20%
INDUCTANCE	1-3 tie(1+2, 3+4), 250kHz, 700mVAC, 0/2.6ADC, Ls	100uH ±10%
LEAKAGE INDUCTANCE	1-3 tie(1+2, 3+4, 5 thru 12), 250kHz, 100mVAC, Ls	1.0uH max.
DIELECTRIC	PRI-SEC 1875VAC, 1 second	1500VAC, 1 minute
TURNS RATIO	(1-3):(12-7)	3:1, ±1%
TURNS RATIO	(1-3):(11-8)	3:1, ±1%
TURNS RATIO	(1-3):(10-9)	3:1, ±1%
TURNS RATIO	(1-3):(5-6)	3:1, ±1%
TURNS RATIO	(1-3):(2-4)	1:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C.

REV.	DATE	Packaging Specifications
6C	4/15	Method: Tape & Reel PKG-0647 www.we-online.com/midcom
6B	6/12	
6A	2/08	SEE REVISION SHEET FOR



Tolerances unless otherwise specified:
 Angles: ±1° Decimals: ±.005 [.13]
 Fractions: ±1/64 Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750310346

PART NO.
750310346

compliant RoHS

SPECIFICATION SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Transformers](#) category:

Click to view products by [Würth](#) manufacturer:

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)