

# XD124/XD224/XD324/XD2902N DIP14 XL124/XL224/XL324/XL2902 SOP14

## FEATURES


- **2-kV ESD Protection for:**
  - XD224, XL224
  - XD324, XL324
  - XD2902, XL2902
- **Wide Supply Ranges**
  - **Single Supply:** 3 V to 32 V (26 V for XD2902)
  - **Dual Supplies:**  $\pm 1.5$  V to  $\pm 16$  V ( $\pm 13$  V for XL2902)
- **Low Supply-Current Drain Independent of Supply Voltage:** 0.8 mA Typ
- **Common-Mode Input Voltage Range Includes Ground, Allowing Direct Sensing Near Ground**
- **Low Input Bias and Offset Parameters**
  - **Input Offset Voltage:** 3 mV Typ  
A Versions: 2 mV Typ
  - **Input Offset Current:** 2 nA Typ
  - **Input Bias Current:** 20 nA Typ  
A Versions: 15 nA Typ
- **Differential Input Voltage Range Equal to Maximum-Rated Supply Voltage:** 32 V (26 V for XD2902)
- **Open-Loop Differential Voltage Amplification:** 100 V/mV Typ
- **Internal Frequency Compensation**
- **On Products Compliant to MIL-PRF-38535, All Parameters Are Tested Unless Otherwise Noted. On All Other Products, Production Processing Does Not Necessarily Include Testing of All Parameters.**

## DESCRIPTION


These devices consist of four independent high-gain frequency-compensated operational amplifiers that are designed specifically to operate from a single supply over a wide range of voltages. Operation from split supplies also is possible if the difference between the two supplies is 3 V to 32 V (3 V to 26 V for the XD2902 device), and  $V_{CC}$  is at least 1.5 V more positive than the input common-mode voltage. The low supply-current drain is independent of the magnitude of the supply voltage.

Applications include transducer amplifiers, dc amplification blocks, and all the conventional operational-amplifier circuits that now can be more easily implemented in single-supply-voltage systems. For example, the XD124 device can be operated directly from the standard 5-V supply that is used in digital systems and provides the required interface electronics, without requiring additional  $\pm 15$ -V supplies.


## XD124/XD224/XD324/XD2902N XL124/XL224/XL324/XL2902




# XD124/XD224/XD324/XD2902N DIP14 XL124/XL224/XL324/XL2902 SOP14

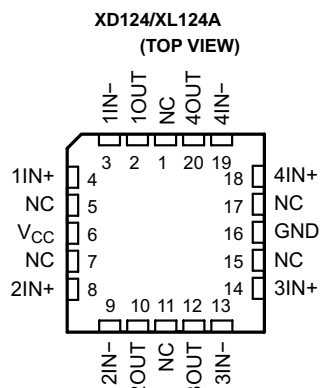

NC – No internal connection

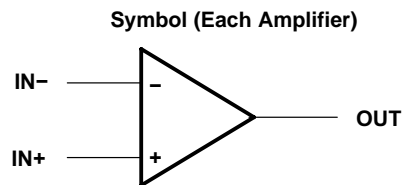

## Schematic (Each Amplifier)

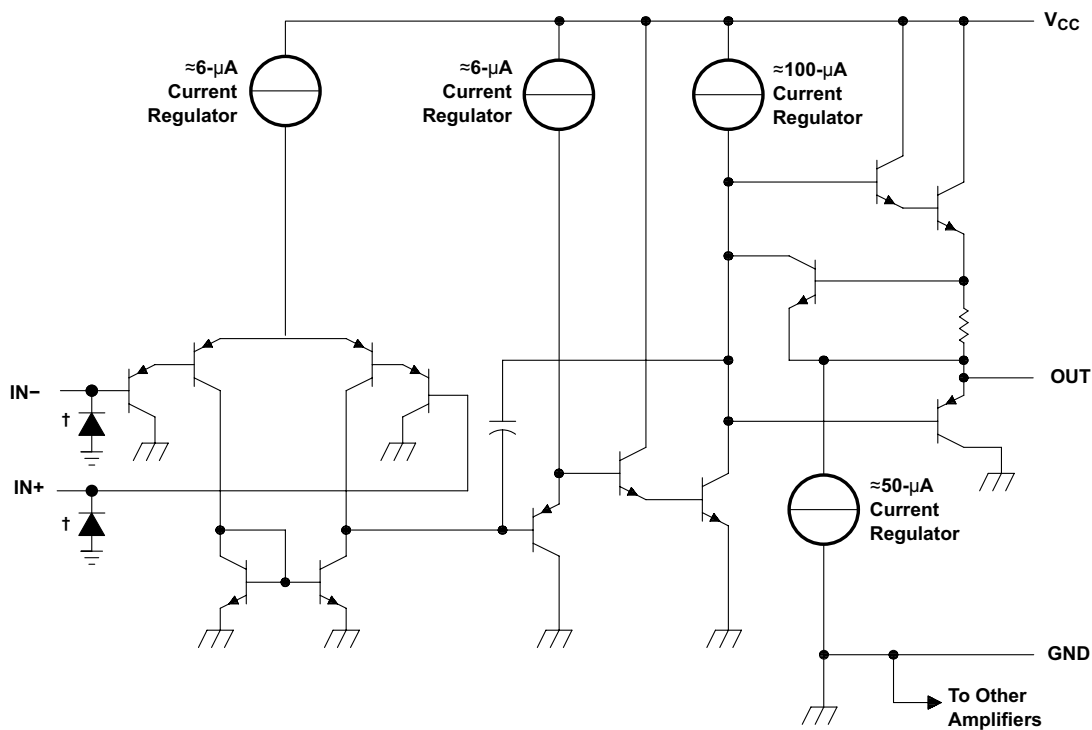

COMPONENT COUNT (total device)	
Epi-FET	1
Transistors	95
Diodes	4
Resistors	11
Capacitors	4

† ESD protection cells - available on XD324 and XL324 only

# XD124/XD224/XD324/XD2902N DIP14

## XL124/XL224/XL324/XL2902 SOP14

### Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

		XD2902	ALL OTHER DEVICES	UNIT
Supply voltage, $V_{CC}$ <sup>(2)</sup>		±13 or 26	±16 or 32	V
Differential input voltage, $V_{ID}$ <sup>(3)</sup>		±26	±32	V
Input voltage, $V_I$ (either input)		−0.3 to 26	−0.3 to 32	V
Duration of output short circuit (one amplifier) to ground at (or below) $T_A = 25^\circ\text{C}$ , $V_{CC} \leq 15\text{ V}$ <sup>(4)</sup>		Unlimited	Unlimited	
Package thermal impedance, $\theta_{JA}$ <sup>(4)(5)</sup>	D package	86	86	°C/W
	DB package	96	96	
	N package	80	80	
	NS package	76	76	
	PW package	113	113	
Package thermal impedance, $\theta_{JC}$ <sup>(6)(7)</sup>	FK package		5.61	°C/W
	J package		15.05	
	W package		14.65	
Operating virtual junction temperature, $T_J$		150	150	°C
Case temperature for 60 seconds	FK package		260	°C
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds	J or W package	300	300	°C
Storage temperature range, $T_{stg}$		−65 to 150	−65 to 150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values (except differential voltages and  $V_{CC}$  specified for the measurement of  $I_{OS}$ ) are with respect to the network GND.
- (3) Differential voltages are at  $IN+$ , with respect to  $IN-$ .
- (4) Short circuits from outputs to  $V_{CC}$  can cause excessive heating and eventual destruction.
- (5) Maximum power dissipation is a function of  $T_{J(max)}$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_{J(max)} - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of  $150^\circ\text{C}$  can affect reliability.
- (6) Maximum power dissipation is a function of  $T_{J(max)}$ ,  $\theta_{JA}$ , and  $T_C$ . The maximum allowable power dissipation at any allowable case temperature is  $P_D = (T_{J(max)} - T_C)/\theta_{JC}$ . Operating at the absolute maximum  $T_J$  of  $150^\circ\text{C}$  can affect reliability.
- (7) The package thermal impedance is calculated in accordance with MIL-STD-883

### ESD Protection

TEST CONDITIONS		TYP	UNIT
Human-Body Model	XD224, XL224, XD324, XL324, XD2902, XL2902,	±2	kV

# XD124/XD224/XD324/XD2902N DIP14

## XL124/XL224/XL324/XL2902 SOP14

### Electrical Characteristics

at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)

PARAMETER			TEST CONDITIONS <sup>(1)</sup>	T <sub>A</sub> <sup>(2)</sup>	XD124, XD224			XD324 XL324			UNIT
					MIN	TYP <sup>(3)</sup>	MAX	MIN	TYP <sup>(3)</sup>	MAX	
V <sub>IO</sub>	Input offset voltage	V <sub>CC</sub> = 5 V to MAX, V <sub>IC</sub> = V <sub>ICRmin</sub> , V <sub>O</sub> = 1.4 V		25°C	3		5	3		7	mV
				Full range	7				9		
I <sub>IO</sub>	Input offset current	V <sub>O</sub> = 1.4 V		25°C	2		30	2		50	nA
				Full range	100				150		
I <sub>IB</sub>	Input bias current	V <sub>O</sub> = 1.4 V		25°C	−20		−150	−20		−250	nA
				Full range	−300				−500		
V <sub>ICR</sub>	Common-mode input voltage range	V <sub>CC</sub> = 5 V to MAX		25°C	0 to V <sub>CC</sub> − 1.5		0 to V <sub>CC</sub> − 1.5		V		
				Full range	0 to V <sub>CC</sub> − 2		0 to V <sub>CC</sub> − 2				
V <sub>OH</sub>	High-level output voltage	R <sub>L</sub> = 2 kΩ		25°C	V <sub>CC</sub> − 1.5		V <sub>CC</sub> − 1.5		V		
		R <sub>L</sub> = 10 kΩ		25°C							
		V <sub>CC</sub> = MAX	R <sub>L</sub> = 2 kΩ	Full range	26			26			
			R <sub>L</sub> ≥ 10 kΩ	Full range	27	28	27 28				
V <sub>OL</sub>	Low-level output voltage	R <sub>L</sub> ≤ 10 kΩ		Full range	5	20	5		20	mV	
A <sub>VD</sub>	Large-signal differential voltage amplification	V <sub>CC</sub> = 15 V, V <sub>O</sub> = 1 V to 11 V, R <sub>L</sub> ≥ 2 kΩ		25°C	50	100	25		100	V/mV	
				Full range	25	15					
CMRR	Common-mode rejection ratio	V <sub>IC</sub> = V <sub>ICRmin</sub>		25°C	70	80	65		80	dB	
k <sub>SVR</sub>	Supply-voltage rejection ratio (ΔV <sub>CC</sub> /ΔV <sub>IO</sub> )			25°C	65	100	65		100	dB	
V <sub>O1</sub> / V <sub>O2</sub>	Crosstalk attenuation	f = 1 kHz to 20 kHz		25°C	120		120		dB		
I <sub>O</sub>	Output current	V <sub>CC</sub> = 15 V, V <sub>ID</sub> = 1 V, V <sub>O</sub> = 0	Source	25°C	−20	−30	−60	−20	−30	−60	mA
				Full range	−10	−10					
		V <sub>CC</sub> = 15 V, V <sub>ID</sub> = −1 V, V <sub>O</sub> = 15 V	Sink	25°C	10	20	10		20		
				Full range	5	5					
		V <sub>ID</sub> = −1 V, V <sub>O</sub> = 200 mV		25°C	12	30	12		30	μA	
I <sub>OS</sub>	Short-circuit output current	V <sub>CC</sub> at 5 V, V <sub>O</sub> = 0, GND at −5 V		25°C	±40	±60	±40		±60	mA	
I <sub>CC</sub>	Supply current (four amplifiers)	V <sub>O</sub> = 2.5 V, No load		Full range	0.7	1.2	0.7		1.2	mA	
		V <sub>CC</sub> = MAX, V <sub>O</sub> = 0.5 V <sub>CC</sub> , No load		Full range	1.4	3	1.4		3		

- (1) All characteristics are measured under open-loop conditions, with zero common-mode input voltage, unless otherwise specified. MAX  $V_{CC}$  for testing purposes is 26 V for XD2902 and 30 V for the others.
- (2) Full range is -55°C to 125°C for LM124, -25°C to 85°C for LM224, and 0°C to 70°C for XD324.
- (3) All typical values are at  $T_A = 25^\circ\text{C}$

**Electrical Characteristics**at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)

PARAMETER		TEST CONDITIONS <sup>(1)</sup>		T <sub>A</sub> <sup>(2)</sup>	XD2902			XL2902			UNIT
					MIN	TYP <sup>(3)</sup>	MAX	MIN	TYP <sup>(3)</sup>	MAX	
V <sub>IO</sub>	Input offset voltage	V <sub>CC</sub> = 5 V to MAX, V <sub>IC</sub> = V <sub>ICR</sub> min, V <sub>O</sub> = 1.4 V	Non-A-suffix devices	25°C	3	7	3	7	mV		
				Full range	10	10					
		A-suffix devices	25°C			1	2				
			Full range			4					
ΔV <sub>IO</sub> /ΔT	Input offset voltage temperature drift	R <sub>S</sub> = 0 Ω		Ful range			7		μV/°C		
I <sub>IO</sub>	Input offset current	V <sub>O</sub> = 1.4 V		25°C	2	50	2	50	nA		
				Full range	300	150					
ΔI <sub>IO</sub> /ΔT	Input offset voltage temperature drift			Ful range			10		pA/°C		
I <sub>IB</sub>	Input bias current	V <sub>O</sub> = 1.4 V		25°C	−20	−250	−20	−250	nA		
				Full range	−500	−500					
V <sub>ICR</sub>	Common-mode input voltage range	V <sub>CC</sub> = 5 V to MAX		25°C	0 to V <sub>CC</sub> − 1.5		0 to V <sub>CC</sub> − 1.5	V			
				Full range	0 to V <sub>CC</sub> − 2	0 to V <sub>CC</sub> − 2					
V <sub>OH</sub>	High-level output voltage	R <sub>L</sub> = 2 kΩ		25°C				V			
		R <sub>L</sub> = 10 kΩ		25°C	V <sub>CC</sub> − 1.5	V <sub>CC</sub> − 1.5					
		V <sub>CC</sub> = MAX	R <sub>L</sub> = 2 kΩ	Full range	22	26					
			R <sub>L</sub> ≥ 10 kΩ	Full range	23	24	27				
V <sub>OL</sub>	Low-level output voltage	R <sub>L</sub> ≤ 10 kΩ		Full range	5	20	5	20	mV		
A <sub>VD</sub>	Large-signal differential voltage amplification	V <sub>CC</sub> = 15 V, V <sub>O</sub> = 1 V to 11 V, R <sub>L</sub> ≥ 2 kΩ		25°C	25	100	25	100	V/mV		
				Full range	15		15				
CMRR	Common-mode rejection ratio	V <sub>IC</sub> = V <sub>ICR</sub> min		25°C	50	80	60	80	dB		
k <sub>SVR</sub>	Supply-voltage rejection ratio (ΔV <sub>CC</sub> /ΔV <sub>IO</sub> )			25°C	50	100	60	100	dB		
V <sub>O1</sub> / V <sub>O2</sub>	Crosstalk attenuation	f = 1 kHz to 20 kHz		25°C	120		120		dB		
I <sub>O</sub>	Output current	V <sub>CC</sub> = 15 V, V <sub>ID</sub> = 1 V, V <sub>O</sub> = 0	Source	25°C	−20	−30	−60	−20	−30	−60	mA
				Full range	−10		−10				
		V <sub>CC</sub> = 15 V, V <sub>ID</sub> = −1 V, V <sub>O</sub> = 15 V	Sink	25°C	10	20	10	20			
				Full range	5		5				
		V <sub>ID</sub> = −1 V, V <sub>O</sub> = 200 mV	25°C	30		12	40	μA			
I <sub>OS</sub>	Short-circuit output current	V <sub>CC</sub> at 5 V, V <sub>O</sub> = 0, GND at −5 V		25°C	±40	±60	±40	±60	mA		
I <sub>CC</sub>	Supply current (four amplifiers)	V <sub>O</sub> = 2.5 V, No load		Full range	0.7	1.2	0.7	1.2	mA		
		V <sub>CC</sub> = MAX, V <sub>O</sub> = 0.5 V <sub>CC</sub> , No load		Full range	1.4	3	1.4	3			

(1) All characteristics are measured under open-loop conditions, with zero common-mode input voltage, unless otherwise specified. MAX  $V_{CC}$  for testing purposes is 26 V for XD2902 and 32 V for XL2902.(2) Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  for XD2902.(3) All typical values are at  $T_A = 25^\circ\text{C}$ .

**Electrical Characteristics**at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)

PARAMETER		TEST CONDITIONS <sup>(1)</sup>		T <sub>A</sub> <sup>(2)</sup>	XD124			XD224			XD324, XL324			UNIT
					MIN	TYP <sup>(3)</sup>	MAX	MIN	TYP <sup>(3)</sup>	MAX	MIN	TYP <sup>(3)</sup>	MAX	
V <sub>IO</sub>	Input offset voltage	V <sub>CC</sub> = 5 V to 30 V, V <sub>IC</sub> = V <sub>ICRmin</sub> , V <sub>O</sub> = 1.4 V		25°C	2			2			2			mV
				Full range	4			4			5			
I <sub>IO</sub>	Input offset current	V <sub>O</sub> = 1.4 V		25°C	10			2			2			nA
				Full range	30			30			75			
I <sub>IB</sub>	Input bias current	V <sub>O</sub> = 1.4 V		25°C	−50			−15			−80			nA
				Full range	−100			−100			−200			
V <sub>ICR</sub>	Common-mode input voltage range	V <sub>CC</sub> = 30 V		25°C	0 to V <sub>CC</sub> − 1.5			0 to V <sub>CC</sub> − 1.5			0 to V <sub>CC</sub> − 1.5			V
				Full range	0 to V <sub>CC</sub> − 2			0 to V <sub>CC</sub> − 2			0 to V <sub>CC</sub> − 2			
V <sub>OH</sub>	High-level output voltage	R <sub>L</sub> = 2 kΩ		25°C	V <sub>CC</sub> − 1.5			V <sub>CC</sub> − 1.5			V <sub>CC</sub> − 1.5			V
		V <sub>CC</sub> = 30 V	R <sub>L</sub> =2kΩ	Full range	26			26			26			
			R <sub>L</sub> ≥10kΩ	Full range	27			27 28			27 28			
V <sub>OL</sub>	Low-level output voltage	R <sub>L</sub> ≤ 10 kΩ		Full range	20			5 20			5 20			mV
A <sub>VD</sub>	Large-signal differential voltage amplification	V <sub>CC</sub> = 15 V, V <sub>O</sub> = 1 V to 11 V, R <sub>L</sub> ≥ 2 kΩ		25°C	50 100			50 100			25 100			V/mV
				Full range	25			25			15			
CMRR	Common-mode rejection ratio	V <sub>IC</sub> = V <sub>ICRmin</sub>		25°C	70			70 80			65 80			dB
k <sub>SVR</sub>	Supply-voltage rejection ratio (ΔV <sub>CC</sub> /ΔV <sub>IO</sub> )			25°C	65			65 100			65 100			dB
V <sub>O1</sub> / V <sub>O2</sub>	Crosstalk attenuation	f = 1 kHz to 20 kHz		25°C	120			120			120			dB
I <sub>O</sub>	Output current	V <sub>CC</sub> = 15 V, V <sub>ID</sub> = 1 V, V <sub>O</sub> = 0	Source	25°C	−20			−20 −30 −60			−20 −30 −60			mA
				Full range	−10			−10			−10			
		V <sub>CC</sub> = 15 V, V <sub>ID</sub> = −1 V, V <sub>O</sub> = 15 V	Sink	25°C	10			10 20			1 20			
				Full range	5			5			5			
		V <sub>ID</sub> = −1 V, V <sub>O</sub> = 200 mV		25°C	12			12 30			12 30			μA
I <sub>OS</sub>	Short-circuit output current	V <sub>CC</sub> at 5 V, GND at −5 V, V <sub>O</sub> = 0		25°C	±40 ±60			±40 ±60			±40 ±60			mA
I <sub>CC</sub>	Supply current (four amplifiers)	V <sub>O</sub> = 2.5 V, No load		Full range	0.7 1.2			0.7 1.2			0.7 1.2			mA
		V <sub>CC</sub> = 30 V, V <sub>O</sub> = 15 V, No load		Full range	1.4 3.			1.4 3			1.4 3			

(1) All characteristics are measured under open-loop conditions, with zero common-mode input voltage, unless otherwise specified.

(2) Full range is -55°C to 125°C for XD124A, -25°C to 85°C for XD224, and 0°C to 70°C for XD324.

(3) All typical values are at  $T_A = 25^\circ\text{C}$ .

# XD124/XD224/XD324/XD2902N DIP14 XL124/XL224/XL324/XL2902 SOP14

## Operating Conditions

$V_{CC} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$

PARAMETER		TEST CONDITIONS	TYP	UNIT
SR	Slew rate at unity gain	$R_L = 1\text{ M}\Omega$ , $C_L = 30\text{ pF}$ , $V_I = \pm 10\text{ V}$ (see Figure 1)	0.5	$\text{V}/\mu\text{s}$
$B_1$	Unity-gain bandwidth	$R_L = 1\text{ M}\Omega$ , $C_L = 20\text{ pF}$ (see Figure 1)	1.2	MHz
$V_n$	Equivalent input noise voltage	$R_S = 100\text{ }\Omega$ , $V_I = 0\text{ V}$ , $f = 1\text{ kHz}$ (see Figure 2)	35	$\text{nV}/\sqrt{\text{Hz}}$

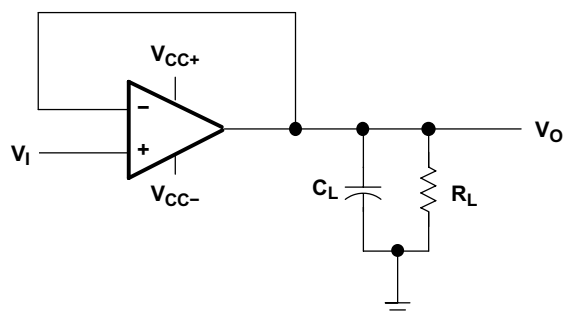


Figure 1. Unity-Gain Amplifier

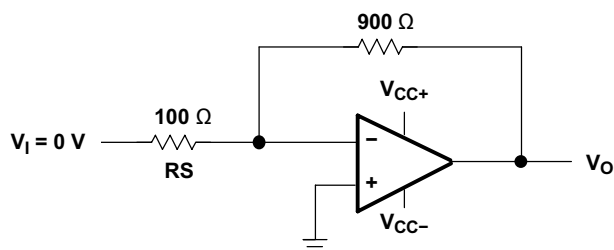


Figure 2. Noise-Test Circuit

以上信息仅供参考. 如需帮助联系客服人员。谢谢 XINLUDA

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Operational Amplifiers - Op Amps](#) category:*

*Click to view products by [XINLUDA](#) manufacturer:*

Other Similar products are found below :

[OPA2991IDSGR](#) [OPA607IDCKT](#) [007614D](#) [633773R](#) [635798C](#) [635801A](#) [702115D](#) [709228FB](#) [741528D](#) [NCV33072ADR2G](#)  
[SC2902DTBR2G](#) [SC2903DR2G](#) [SC2903VDR2G](#) [LM258AYDT](#) [LM358SNG](#) [430227FB](#) [430228DB](#) [460932C](#) [AZV831KTR-G1](#) [409256CB](#)  
[430232AB](#) [LM2904DR2GH](#) [LM358YDT](#) [LT1678IS8](#) [042225DB](#) [058184EB](#) [070530X](#) [SC224DR2G](#) [SC239DR2G](#) [SC2902DG](#)  
[SCYA5230DR2G](#) [714228XB](#) [714846BB](#) [873836HB](#) [MIC918YC5-TR](#) [TS912BIYDT](#) [NCS2004MUTAG](#) [NCV33202DMR2G](#)  
[M38510/13101BPA](#) [NTE925](#) [SC2904DR2G](#) [SC358DR2G](#) [LM358EDR2G](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#) [HA1630D02MMEL-E](#)  
[NJM358CG-TE2](#) [HA1630S01LPEL-E](#) [LM324AWPT](#) [HA1630Q06TELL-E](#)