

JTA Series



- 4:1 Input Range
- -40 °C to +100 °C Operating Temperature
- Single & Dual Outputs
- Overvoltage & Overcurrent Protection
- UL Safety Approvals
- Remote On/Off
- 3 Year Warranty

Specification

Input

Input Voltage Range	<ul style="list-style-type: none"> • 24 V (9-36 VDC) • 48 V (18-75 VDC)
Input Current	<ul style="list-style-type: none"> • JTA10: 1.65 A max at 9 VDC input • JTA15: 2.20 A max at 9 VDC input • JTA20: 2.90 A max at 9 VDC input
Input Filter	<ul style="list-style-type: none"> • Pi Network
Input Surge	<ul style="list-style-type: none"> • 24 V models: 50 VDC for 100ms • 48 V models: 100 VDC for 100 ms
Input Reflected Ripple Current	<ul style="list-style-type: none"> • 24 V models, with a 100 μF capacitor: JTA10: 20mA pk-pk, JTA15: 35mA pk-pk, JTA20: 60mA pk-pk, • 48 V models, with a 22 μF capacitor: JTA10: 30 mA pk-pk, JTA15: 20 mA pk-pk, JTA20: 30 mA pk-pk
Input Reverse Voltage Protection	<ul style="list-style-type: none"> • None

Output

Output Voltage	<ul style="list-style-type: none"> • See table
Output Voltage Trim	<ul style="list-style-type: none"> • $\pm 10\%$ (15 & 20 W models only)
Voltage Balance	<ul style="list-style-type: none"> • $\pm 1\%$ max dual models, 100% load
Minimum Load	<ul style="list-style-type: none"> • No minimum load required for single output models, 10% required for dual output models
Line Regulation	<ul style="list-style-type: none"> • $\pm 1\%$ max
Load Regulation	<ul style="list-style-type: none"> • Single output models: $\pm 1\%$ max • Dual output models: $\pm 2\%$ max for a 10-100% load change
Setpoint Accuracy	<ul style="list-style-type: none"> • $\pm 2\%$
Ripple & Noise	<ul style="list-style-type: none"> • Single output models: 50 mV pk-pk • Dual output models: 75 mV pk-pk typical at 20 MHz bandwidth
Transient Response	<ul style="list-style-type: none"> • 4% max deviation, recovery to within 1% in <500 μs for a 25% load change
Temperature Coefficient	<ul style="list-style-type: none"> • 0.02%/°C
Overvoltage Protection	<ul style="list-style-type: none"> • See table
Overcurrent Protection	<ul style="list-style-type: none"> • 120-190% • JTA10: Constant current, auto recovery • JTA15/20: Trip & restart (hiccup mode)
Short Circuit Protection	<ul style="list-style-type: none"> • Continuous with auto recovery
Remote On/Off	<ul style="list-style-type: none"> • On = Logic High or Open • Off = Logic Low or <1.8 V (15 & 20 W models only)
Maximum Capacitive Load	<ul style="list-style-type: none"> • Single outputs: 1000 μF, Dual outputs: 650 μF

General

Efficiency	<ul style="list-style-type: none"> • See table
Isolation Voltage	<ul style="list-style-type: none"> • 1500 VDC Input to Output
Isolation Resistance	<ul style="list-style-type: none"> • $10^9 \Omega$
Switching Frequency	<ul style="list-style-type: none"> • 300 kHz typical
Power Density	<ul style="list-style-type: none"> • JTA10: 11.4 W/in³ • JTA15: 10.4 W/in³ • JTA20: 13.9 W/in³
MTBF	<ul style="list-style-type: none"> • 1.0 MHrs to MIL-HDBK-217F at 25°C, GB

Environmental

Operating Temperature	<ul style="list-style-type: none"> • -40 °C to +100 °C, derate from 100% load at 70 °C (60 °C for JTA20) to no load at 100 °C
Case Temperature	<ul style="list-style-type: none"> • +100 °C max
Cooling	<ul style="list-style-type: none"> • Convection-cooled
Operating Humidity	<ul style="list-style-type: none"> • 5-95% RH, non-condensing
Storage Temperature	<ul style="list-style-type: none"> • -55 °C to +105 °C

EMC & Safety

Emissions	<ul style="list-style-type: none"> • EN55022, level A conducted (below -25 °C) level B conducted (-25 °C to +100 °C) (see note 1) • EN55022, level A radiated
ESD Immunity	<ul style="list-style-type: none"> • EN61000-4-2, level 2 Perf Criteria A
Radiated Immunity	<ul style="list-style-type: none"> • EN61000-4-3 3 Vrms, Perf Criteria A
Conducted Immunity	<ul style="list-style-type: none"> • EN61000-4-6 3 V/m, Perf Criteria A
Safety Approvals	<ul style="list-style-type: none"> • UL60950-1


Models and Ratings

Input Voltage	Maximum Power	Overvoltage Protection	Output V1		Output V2		Efficiency ⁽²⁾	Model Number
			Voltage	Current	Voltage	Current		
9-36 VDC	6.6 W	3.9 V	3.3 V	2.00 A			77%	JTA1024S3V3
	10.0 W	6.8 V	5.0 V	2.00 A			79%	JTA1024S05
	10.0 W	15.0 V	12.0 V	0.83 A			81%	JTA1024S12
	10.0 W	18.0 V	15.0 V	0.67 A			81%	JTA1024S15
	10.0 W	6.8 V	+5.0 V	1.00 A	-5.0 V	1.00 A	80%	JTA1024D01
	10.0 W	15.0 V	+12.0 V	0.42 A	-12.0 V	0.42 A	80%	JTA1024D02
	10.0 W	18.0 V	+15.0 V	0.33 A	-15.0 V	0.33 A	80%	JTA1024D03
18-75 VDC	6.6 W	3.9 V	3.3 V	2.00 A			78%	JTA1048S3V3
	10.0 W	6.8 V	5.0 V	2.00 A			80%	JTA1048S05
	10.0 W	15.0 V	12.0 V	0.83 A			82%	JTA1048S12
	10.0 W	18.0 V	15.0 V	0.67 A			82%	JTA1048S15
	10.0 W	6.8 V	+5.0 V	1.00 A	-5.0 V	1.00 A	81%	JTA1048D01
	10.0 W	15.0 V	+12.0 V	0.42 A	-12.0 V	0.42 A	83%	JTA1048D02
	10.0 W	18.0 V	+15.0 V	0.33 A	-15.0 V	0.33 A	83%	JTA1048D03

Notes

- For EN55022 Level B performance below -25 °C, a 100 µF (24 VDC input), 22 µF (48 VDC input) electrolytic capacitor is required across the input of the converter.
- Efficiency is measured at nominal input, full load and 25 °C

Mechanical Details

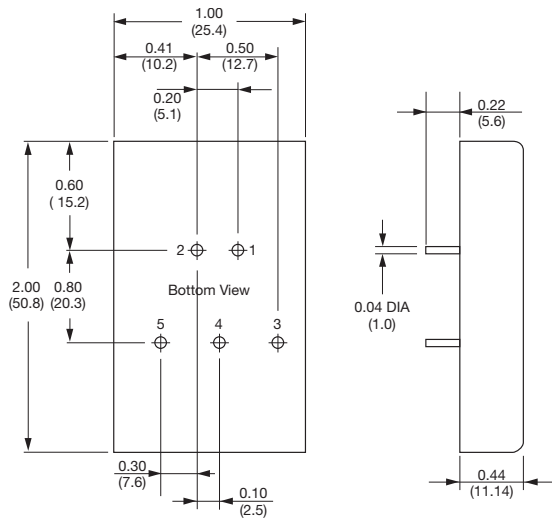


PIN CONNECTIONS		
Pin	Single Output	Dual Output
1	+Input	+Input
2	-Input	-Input
3	+Output	+Output
4	No pin	Common
5	-Output	-Output

Notes

- All dimensions are in inches (mm)
- Weight: 0.06 lb (28 g) approx.
- Pin diameter tolerance: ±0.002 (±0.052)
- Pin pitch tolerance: ±0.01 (±0.25)
- Case tolerance: ±0.04 (±1.0)
- Packaging Style: Copper case with non-conducting base

Application Notes

Derating Curve

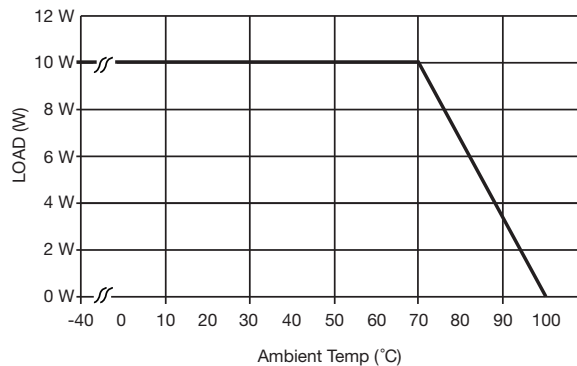


Models and Ratings

Input Voltage	Maximum Power	Overvoltage Protection	Output V1		Output V2		Efficiency ⁽²⁾	Model Number
			Voltage	Current	Voltage	Current		
9-36 VDC	10 W	3.9 V	3.3 V	3.000 A			76%	JTA1524S3V3
	15 W	6.8 V	5.0 V	3.000 A			80%	JTA1524S05
	15 W	15.0 V	12.0 V	1.250 A			82%	JTA1524S12
	15 W	18.0 V	15.0 V	1.000 A			82%	JTA1524S15
	15 W	6.8 V	+5.0 V	1.500 A	-5.0 V	1.500 A	80%	JTA1524D01
	15 W	15.0 V	+12.0 V	0.625 A	-12.0 V	0.625 A	82%	JTA1524D02
	15 W	18.0 V	+15.0 V	0.500 A	-15.0 V	0.500 A	82%	JTA1524D03
18-75 VDC	10 W	3.9 V	3.3 V	3.000 A			76%	JTA1548S3V3
	15 W	6.8 V	5.0 V	3.000 A			80%	JTA1548S05
	15 W	15.0 V	12.0 V	1.250 A			82%	JTA1548S12
	15 W	18.0 V	15.0 V	1.000 A			82%	JTA1548S15
	15 W	6.8 V	+5.0 V	1.500 A	-5.0 V	1.500 A	80%	JTA1548D01
	15 W	15.0 V	+12.0 V	0.625 A	-12.0 V	0.625 A	82%	JTA1548D02
	15 W	18.0 V	+15.0 V	0.500 A	-15.0 V	0.500 A	82%	JTA1548D03

Notes

- For EN55022 Level B performance below -25 °C, a 220 µF (24 VDC input), 47 µF (48 VDC input) electrolytic capacitor is required across the input of the converter.
- Efficiency is measured at nominal input, full load and 25 °C

Mechanical Details

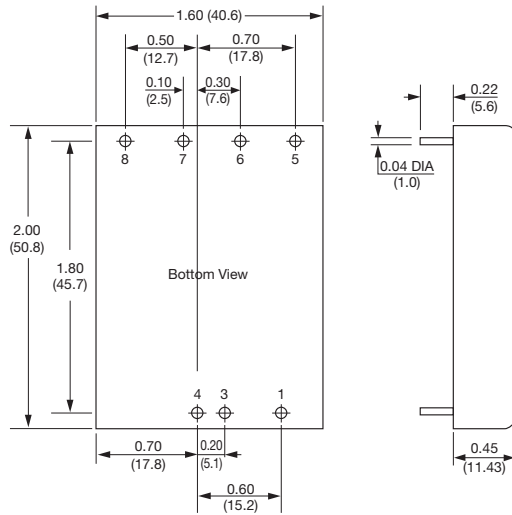


PIN CONNECTIONS		
Pin	Single Output	Dual Output
1	On/Off control	On/Off control
3	-Vin	-Vin
4	+Vin	+Vin
5	Trim	Trim
6	-Vout	-Vout
7	+Vout	Common
8	No pin	+Vout

Notes

- All dimensions are in inches (mm)
- Weight: 0.11 lb (50 g) approx.
- Pin diameter tolerance: ±0.001 (±0.025)
- Pin pitch tolerance: ±0.01 (±0.25)
- Case tolerance: ±0.04 (±1.0)
- Packaging Style: Copper case with non-conducting base

Application Notes

Derating Curve

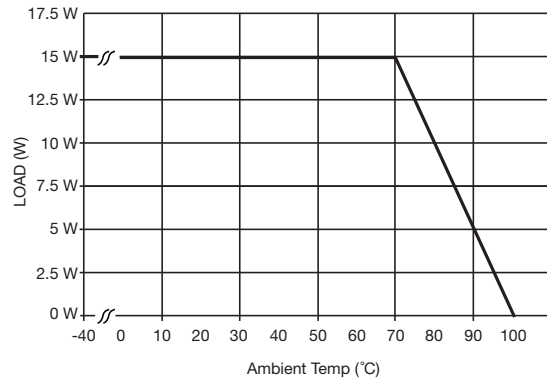

Output Trim

Output Voltage	OUTPUT TRIM	
	R Trim Down (kΩ)	R Trim Up (kΩ)
3.3 V	(6.180 - (12.10 x ΔVo))/ΔVo	(3.484 - (7.511 x ΔVo))/ΔVo
5.0 V	(5.788 - (10.57 x ΔVo))/ΔVo	(5.788 - (8.250 x ΔVo))/ΔVo
12.0 V	(86.496 - (60.10 x ΔVo))/ΔVo	(19.763 - (14.366 x ΔVo))/ΔVo
15.0 V	(150.000 - (87.00 x ΔVo))/ΔVo	(25.585 - (14.516 x ΔVo))/ΔVo
±5.0 V	(68.296 - (48.10 x ΔVo))/ΔVo	(20.657 - (19.500 x ΔVo))/ΔVo
±12.0 V	(430.000 - (120.00 x ΔVo))/ΔVo	(42.141 - (13.793 x ΔVo))/ΔVo
±15.0 V	(743.000 - (177.00 x ΔVo))/ΔVo	(56.644 - (17.647 x ΔVo))/ΔVo

Note:


- ΔVo is the change in the trimmed output voltage from the nominal output voltage.

Example: JTA1524S05 trimmed to 5.3 V.
 For dual output models, Vo should be multiplied by 2.

$$\Delta V_o = 5.0 - 5.3 = 0.3 \text{ VDC}$$

The equation is $(5.788 - (8.25 \times \Delta V_o)) / \Delta V_o$

The value of resistor = $(5.788 - (8.25 \times 0.3)) / 0.3 = 11.04 \text{ k}\Omega$
 Connect the resistor between TRIM pin and -Vo pin.




Models and Ratings

Input Voltage	Maximum Power	Overvoltage Protection	Output V1		Output V2		Efficiency ⁽²⁾	Model Number
			Voltage	Current	Voltage	Current		
9-36 VDC	13.2 W	3.9 V	3.3 V	4.00 A			78%	JTA2024S3V3
	20.0 W	6.8 V	5.0 V	4.00 A			81%	JTA2024S05
	20.0 W	15.0 V	12.0 V	1.67 A			83%	JTA2024S12
	20.0 W	18.0 V	15.0 V	1.33 A			83%	JTA2024S15
	20.0 W	6.8 V	+5.0 V	2.00 A	-5.0 V	2.00 A	83%	JTA2024D01
	20.0 W	15.0 V	+12.0 V	0.83 A	-12.0 V	0.83 A	83%	JTA2024D02
	20.0 W	18.0 V	+15.0 V	0.67 A	-15.0 V	0.67 A	83%	JTA2024D03
18-75 VDC	13.2 W	3.9 V	3.3 V	4.00 A			78%	JTA2048S3V3
	20.0 W	6.8 V	5.0 V	4.00 A			82%	JTA2048S05
	20.0 W	15.0 V	12.0 V	1.67 A			84%	JTA2048S12
	20.0 W	18.0 V	15.0 V	1.33 A			84%	JTA2048S15
	20.0 W	6.8 V	+5.0 V	2.00 A	-5.0 V	2.00 A	84%	JTA2048D01
	20.0 W	15.0 V	+12.0 V	0.83 A	-12.0 V	0.83 A	84%	JTA2048D02
	20.0 W	18.0 V	+15.0 V	0.67 A	-15.0 V	0.67 A	84%	JTA2048D03

Notes

- For EN55022 Level B performance below -25 °C, a 220 µF (24 VDC input), 47 µF (48 VDC input) electrolytic capacitor is required across the input of the converter.
- Efficiency is measured at nominal input, full load and 25 °C

Mechanical Details

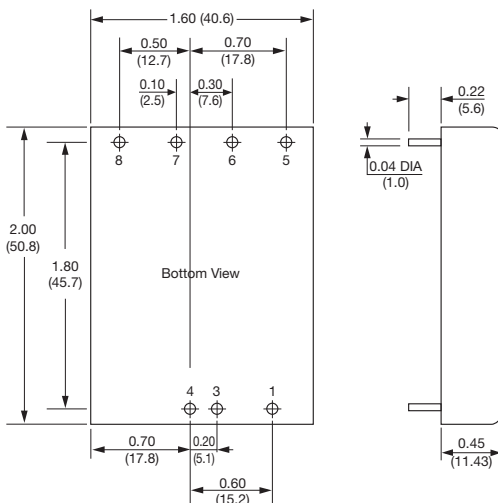


PIN CONNECTIONS		
Pin	Single Output	Dual Output
1	On/Off control	On/Off control
3	-Vin	-Vin
4	+Vin	+Vin
5	Trim	Trim
6	-Vout	-Vout
7	+Vout	Common
8	No pin	+Vout

Notes

- All dimensions are in inches (mm)
- Weight: 0.11 lb (50 g) approx.
- Pin diameter tolerance: ±0.001 (±0.025)
- Pin pitch tolerance: ±0.01 (±0.25)
- Case tolerance: ±0.04 (±1.0)
- Packaging Style: Copper case with non-conducting base

Application Notes

Derating Curve

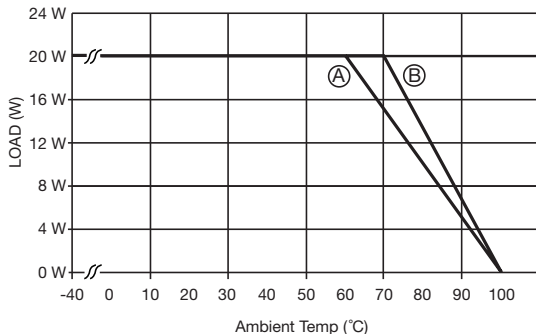

Curve A: Convection cooling
100% load at +60 °C to 0% load at +100 °C

Curve B: 150 LFM airflow
100% load at +70 °C to 0% load at +100 °C

Output Trim

Output voltage	OUTPUT TRIM	
	R Trim Down (kΩ)	R Trim Up (kΩ)
3.3 V	$(6.180 - (12.10 \times \Delta Vo)) / \Delta Vo$	$(3.484 - (7.511 \times \Delta Vo)) / \Delta Vo$
5.0 V	$(5.788 - (10.57 \times \Delta Vo)) / \Delta Vo$	$(5.788 - (8.250 \times \Delta Vo)) / \Delta Vo$
12.0 V	$(86.496 - (60.10 \times \Delta Vo)) / \Delta Vo$	$(19.763 - (14.366 \times \Delta Vo)) / \Delta Vo$
15.0 V	$(150.000 - (87.00 \times \Delta Vo)) / \Delta Vo$	$(25.585 - (14.516 \times \Delta Vo)) / \Delta Vo$
±5.0 V	$(68.296 - (48.10 \times \Delta Vo)) / \Delta Vo$	$(20.657 - (19.500 \times \Delta Vo)) / \Delta Vo$
±12.0 V	$(430.000 - (120.00 \times \Delta Vo)) / \Delta Vo$	$(42.141 - (13.793 \times \Delta Vo)) / \Delta Vo$
±15.0 V	$(743.000 - (177.00 \times \Delta Vo)) / \Delta Vo$	$(56.644 - (17.647 \times \Delta Vo)) / \Delta Vo$

Note:

- ΔVo is the change in the trimmed output voltage from the nominal output voltage.


Example: JTA2024S05 trimmed to 5.3 V. For dual output models, Vo should be multiplied by 2.

$$\Delta Vo = 5.0 - 5.3 = 0.3 \text{ VDC}$$

The equation is $(5.788 - (8.25 \times \Delta Vo)) / \Delta Vo$

The value of resistor = $(5.788 - (8.25 \times 0.3)) / 0.3 = 11.04 \text{ K}\Omega$

Connect the resistor between TRIM pin and -Vo pin.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [XP Power](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)