

### 产品特点

- 高频率温度稳定度
- 低相噪
- SMD 封装 (7.0×5.0mm)

### 应用领域

- 基站
- 仪器仪表
- 合成器
- SDH/SONET
- 医疗电子




### NV0507E 系列

参数	参数值			单位	条件	
	最小值	典型值	最大值			
工作电压	-	3.3	-	V	V <sub>CC</sub> ±5%	
工作电流	-	-	25	mA	-40°C ~ +85°C	
频率范围	10~ 50			MHz		
常规频率	10, 20, 40, 50			MHz		
初始频率精度	-	-	±15	ppm	出厂时校准 +25°C	
方波	高电平	2.4	-	V	方波输出, 负载=15pf	
	低电平	-	-	0.4	V	方波输出, 负载=15pf
	占空比	45	-	55	%	(V <sub>OH</sub> - V <sub>OL</sub> )/2
	上升下降沿	-	-	6	ns	方波输出, 负载=15pf
	负载	-	-	15	pf	
削顶正弦波	输出电平	0.8	-	V <sub>p-p</sub>		
	负载	10KΩ//10pF				
电源特性	-	-	±0.1	ppm	V <sub>CC</sub> ±5%	
负载特性	-	-	±0.2		负载±10%	
老化/第一年	-	-	±1.0			
相位噪声 @50MHz	-	-	-78	dBc/Hz	Offset 10Hz	
	-	-	-112		Offset 100Hz	
	-	-	-140		Offset 1kHz	
	-	-	-150		Offset 10kHz	
	-	-	-155		Offset 100kHz	
电压控制范围	0~3.3			V		
频率牵引范围	±50	-	-	ppm		
斜率	正斜率					
线性度	-	-	10	%		
环境条件						
工作温度范围	-40°C ~ +85°C					
存储温度范围	-55°C ~ +125°C					

备注：最小值~最大值为可提供的指标范围

### 封装图

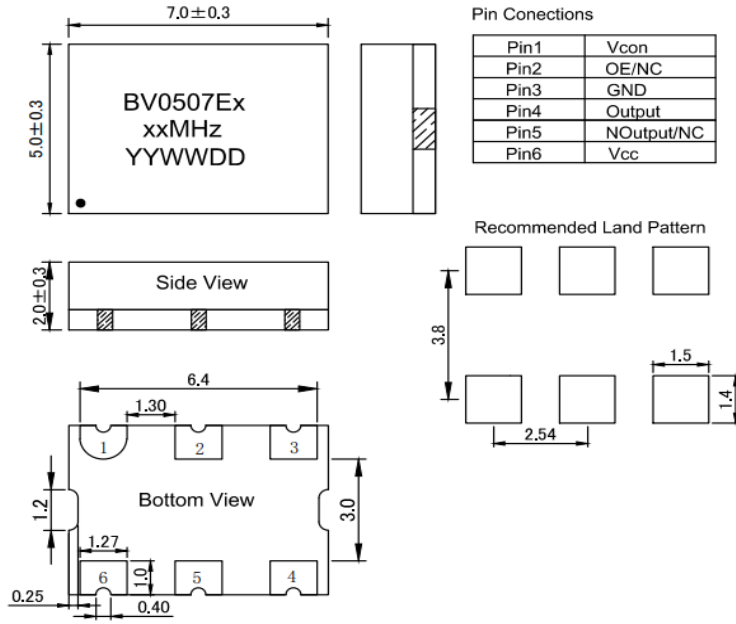

### 最大额定值


参数	符号	额定值
工作电压	Vcc	-0.5V / 6V
压控电压	Vcon	0V / 3V
ESD, HBM/CDM/MM		4KV/ 2KV/ 200V

### 可靠性

参数	标准
温度应力测试	IEC60068, GJB360B
机械应力测试	IEC60068, GJB360B
EMC测试	IEC61000, JESD22
可焊性测试	EIA/JESD22-B102-C
接触焊盘	金镍
RoHS	RoHS Directive 2011/65/EU Annex II Recasting 2002/95/EC

### 选型指南

**NV 0507E X X X XXX X XXXX XX.XX**

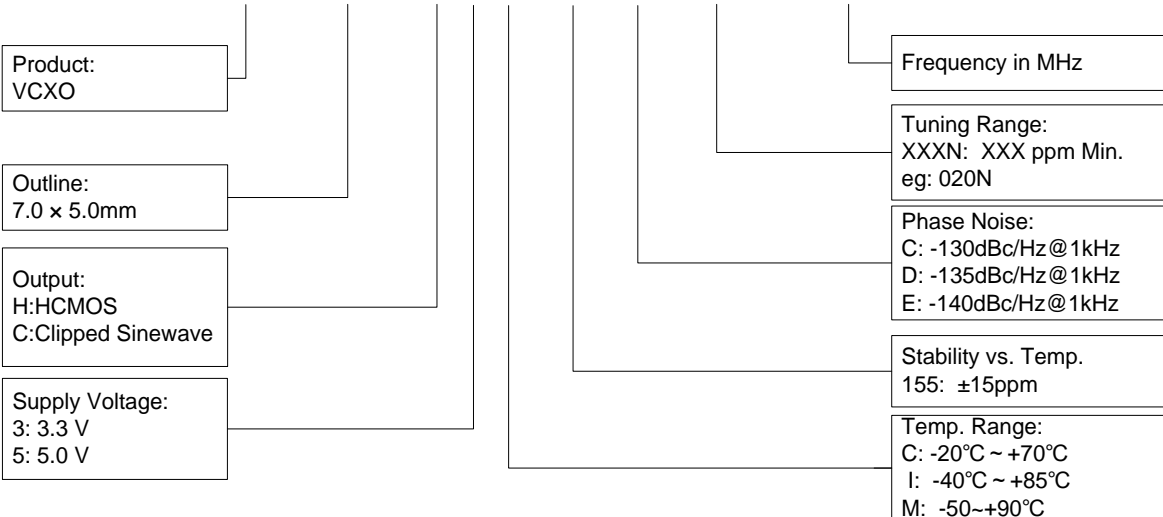

例如: NV0507EH31155050E10

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [VCXO Oscillators](#) category:*

*Click to view products by [XTALTQ](#) manufacturer:*

Other Similar products are found below :

[3808AI-DF-33NG-80.0000](#) [SIT3808AI-CF-33EM-50.000000X](#) [FRSONT019](#) [SiT3701AC-43-33C-10.00000X](#) [315LB3I1250T](#) [CVPD-922X-100.000](#) [FY3HCJM45.1584-BULK](#) [SiT3807AC-C2-33EB-12.288000Y](#) [NBVSPA015LN1TAG](#) [NBVSPA015LNHTAG](#) [NBVSPA019LNHTAG](#) [NBVSPA024LN1TAG](#) [SX3V24.576B20100F30TNN](#) [SX3V16.384B2070F30TNN](#) [SX3V25.000B20100F30TNN](#) [NV0507DH3I155E030N100](#) [SX3V12.288B20070F30TNNS](#) [SX5V16.384B20100F30TNNS](#) [SX7V20.000B20100F30TNNS](#) [SX3V2.048B20070F30TNN](#) [SX7V10.000B20100F30TNNS](#) [SX7V25.000B20100F30TNNS](#) [SX7V49.152B20100F30TNNS](#) [SX3V49.152B20100F30TNNS](#) [SX7V45.1584B20100F30TNNS](#) [SX3V10.000B20070F30TNNS](#) [SX3V12.288B20070F30TNN](#) [SX5V10.000B20100F30TNNS](#) [SX7V16.384B20100F30TNNS](#) [SX5V12.288B20100F30TNNS](#) [SX7V19.440B20100F30TNNS](#) [SX5V49.152B20100F30TNNS](#) [SX3V45.1584B20100F30TNNS](#) [SX5V50.000B20100F30TNNS](#) [SX5V24.576B20100F30TNNS](#) [SX7V27.000B20100F30TNNS](#) [SX7V32.768B20100F30TNNS](#) [SX3V27.000B20100F30TNNS](#) [SX5V40.000B20100F30TNNS](#) [SX3V32.768B20100F30TNNS](#) [SX3V40.000B20100F30TNNS](#) [SX7V12.288B20100F30TNNS](#) [SX3V24.000B20085F30TNNS](#) [SX3V20.000B20085F30TNNS](#) [SX5V25.000B20100F30TNNS](#) [SX3V10.000B20070F30TNN](#) [SX3V16.384B20070F30TNNS](#) [SX3V19.440B20085F30TNNS](#) [SX5V20.000B20100F30TNNS](#) [SX3V24.576B20100F30TNNS](#)