

Multilayer Balun

For 2.4GHz W-LAN & Bluetooth

HHM Series 1.6x0.8mm [EIA 0603] TYPE



Ω.


b


**<b>ØTDK** 

#### HHM17139B2

# SHAPES AND DIMENSIONS


[Top View]





[Bottom View]

d



| L       | W       | Т    | а       | b       | С       | d       | е       |
|---------|---------|------|---------|---------|---------|---------|---------|
| 1.60    | 0.80    | 0.50 | 0.10    | 0.30    | 0.25    | 0.55    | 0.15    |
| +/-0.10 | +/-0.10 | Max  | +/-0.10 | +/-0.10 | +/-0.10 | +/-0.10 | +/-0.10 |

**Terminal functions** 

| (1) | Unbalanced Port         |  |  |  |  |
|-----|-------------------------|--|--|--|--|
| (2) | DC feed + RF GND or GND |  |  |  |  |
| (3) | Balanced Port           |  |  |  |  |

| (4) | Balanced Port |
|-----|---------------|
| (5) | GND           |
| (6) | N.C.          |

# TEMPERATURE RANGE

| <b>Operating temperature</b> | Storage temperature |
|------------------------------|---------------------|
| –40 to +85 °C                | –40 to +85 °C       |

### HHM17139B2

# ELECTRICAL CHARACTERISTICS

(Measurement)

| Parameter                | Frequency (MHz) |    | TDK Spec |              |       |      |
|--------------------------|-----------------|----|----------|--------------|-------|------|
| Farameter                |                 |    | Min.     | Тур.         | Max.  |      |
| Unbalanced Port          |                 |    |          | 50 (Nominal) |       |      |
| Characteristic Impedance |                 |    |          |              |       | iai) |
| Balanced Port            |                 |    |          | EQ (Nominal) |       |      |
| Characteristic Impedance |                 |    |          | 50 (Nominal) |       | iai) |
| Return Loss              | 2400            | to | 2600     | 10.0         | 23.8  |      |
| at Unbalanced Port (dB)  | 2400            | 10 | 2000     | 10.0         | 23.0  | -    |
| Phase Balance (deg.)     | 2400            | to | 2600     | 170          | 178.4 | 190  |
| Amplitude Balance (dB)   | 2400            | to | 2600     | -1.0         | 0.53  | 1.0  |
| Insertion Loss (dB)      | 2400            | to | 2600     | -            | 0.42  | 0.7  |
| Power Handling (W)       |                 |    |          | -            | -     | 1.5  |

Ta = +25+/-5°C

**公TDK** 

#### HHM17139B2


# FREQUENCY CHARACTERISTICS


#### HHM17139B2(UNBALANCE 50ohm/BALANCE 50ohm)


Return Loss 0 -5 -10 -15 Return Loss[dB] -20 -25 -30 -35 -40 -45 2000 2200 2400 2600 2800 3000 Frequency[MHz]

Amplitude Balance 2400.0 MHz -0.32 dB 2400.0 MHz -32.27 dB 2500.0 MHz -32.66 dB 2 2500.0 MHz -0.42 dB 2600.0 MHz 2600.0 MHz e[dB] 1 -23.77 dB -0.53 dB Amplitude Balanc 0 -1 -2 2000 2200 2400 2600 2800 3000 Frequency[MHz]






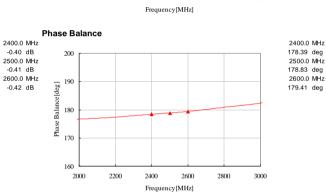

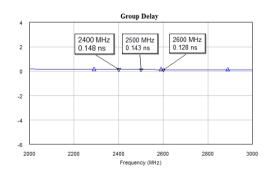

#### HHM17139B2

## RECOMMENDED LAND PATTERN

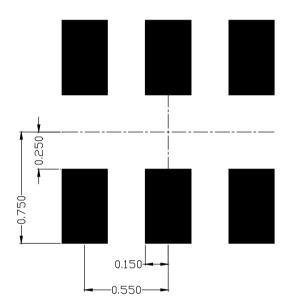


## ENVIRONMENT INFORMATION

RoHS Statement RoHS Compliance

#### HHM17139B2

# RECOMMENDED REFLOW PROFILE

Pb free solder

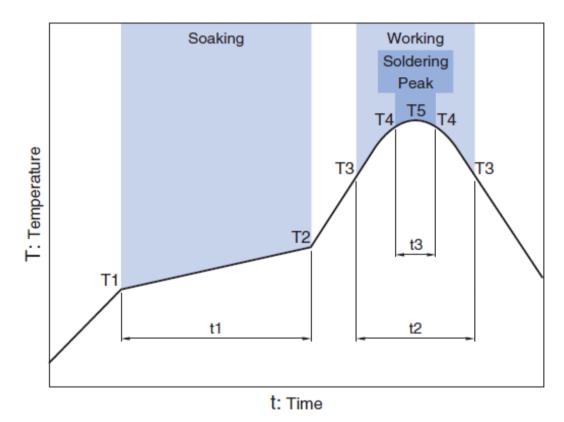

|       | Soaking |              | V     | Working Soldering |              | Working      |            | ering | Peak |
|-------|---------|--------------|-------|-------------------|--------------|--------------|------------|-------|------|
| Te    | mp.     | Time         | Temp. | Time              | Temp.        | Time         | Temp.      |       |      |
| T1    | T2      | t1           | Т3    | t2                | T4           | t3           | T5         |       |      |
| 150°C | 180°C   | 60 to 120sec | 230°C | more than 30sec   | 247 to 253°C | within 10sec | 260°C Max. |       |      |

## REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

## SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

## 

The products listed on this specification sheet are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet.

- 1. Aerospace/Aviation equipment
- 2. Transportation equipment (cars, electric trains, ships, etc.)
- 3. Medical equipment
- 4. Power-generation control equipment
- 5. Atomic energy-related equipment
- 6. Seabed equipment
- 7. Transportation control equipment
- 8. Public information-processing equipment
- 9. Military equipment
- 10. Electric heating apparatus, burning equipment
- 11. Disaster prevention/crime prevention equipment
- 12. Safety equipment
- 13. Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.

#### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by TDK manufacturer:

Other Similar products are found below :

MAPDCC0004 PD0409J5050S2HF 880157 HHS-109-PIN DC1417J5005AHF DC4859J5005AHF AFS14A30-2185.00-T3 AFS14A35-1591.50-T3 DS-323-PIN DSS-313-PIN B39321R801H210 B39321R821H210 B39921B4317P810 1A0220-3 2089-6207-00 JP510S LFB212G45SG8C341 LFB322G45SN1A504 LFL182G45TC3B746 SF2159E 30057 1P510S CER0813B 3A325 40287 41180 ATB3225-75032NCT B69842N5807A150 BD0810N50100AHF BD2326L50200AHF BD2425J50200AHF HMC189AMS8TR C5060J5003AHF JHS-114-PIN JP503AS DC0710J5005AHF DC2327J5005AHF DC3338J5005AHF 43020 LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S 10013-20 SF2081E SF2194E SF2238E CDBLB455KCAX39-B0 RF1353C PD0922J5050D2HF