



FEATURES


- Complementary to MMBT5401
- Ideal for Medium Power Amplification and Switching

Marking: G1

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	180	V
V_{CEO}	Collector-Emitter Voltage	160	V
V_{EBO}	Emitter-Base Voltage	6	V
I_{C}	Collector Current	600	mA
P_{C}	Collector Power Dissipation	300	mW
$R_{\theta\text{JA}}$	Thermal Resistance From Junction To Ambient	416	$^\circ\text{C}/\text{W}$
$T_{\text{J}}, T_{\text{stg}}$	Operation Junction and Storage Temperature Range	-55~+150	$^\circ\text{C}$

SOT-23



1. BASE
2. EMITTER
3. COLLECTOR

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise specified)









Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(\text{BR})\text{CBO}}$	$I_{\text{C}}=100\mu\text{A}, I_{\text{E}}=0$	180			V
Collector-emitter breakdown voltage	$V_{(\text{BR})\text{CEO}}^*$	$I_{\text{C}}=1\text{mA}, I_{\text{B}}=0$	160			V
Emitter-base breakdown voltage	$V_{(\text{BR})\text{EBO}}$	$I_{\text{E}}=10\mu\text{A}, I_{\text{C}}=0$	6			V
Collector cut-off current	I_{CBO}	$V_{\text{CB}}=120\text{V}, I_{\text{E}}=0$			50	nA
Emitter cut-off current	I_{EBO}	$V_{\text{EB}}=4\text{V}, I_{\text{C}}=0$			50	nA
DC current gain	$h_{\text{FE}(1)}^*$	$V_{\text{CE}}=5\text{V}, I_{\text{C}}=1\text{mA}$	80			
	$h_{\text{FE}(2)}^*$	$V_{\text{CE}}=5\text{V}, I_{\text{C}}=10\text{mA}$	100		300	
	$h_{\text{FE}(3)}^*$	$V_{\text{CE}}=5\text{V}, I_{\text{C}}=50\text{mA}$	50			
Collector-emitter saturation voltage	$V_{\text{CE}(\text{sat})1}^*$	$I_{\text{C}}=10\text{mA}, I_{\text{B}}=1\text{mA}$			0.15	V
	$V_{\text{CE}(\text{sat})2}^*$	$I_{\text{C}}=50\text{mA}, I_{\text{B}}=5\text{mA}$			0.2	V
Base-emitter saturation voltage	$V_{\text{BE}(\text{sat})1}^*$	$I_{\text{C}}=10\text{mA}, I_{\text{B}}=1\text{mA}$			1	V
	$V_{\text{BE}(\text{sat})2}^*$	$I_{\text{C}}=50\text{mA}, I_{\text{B}}=5\text{mA}$			1	V
Transition frequency	f_{T}	$V_{\text{CE}}=10\text{V}, I_{\text{C}}=10\text{mA}, f=100\text{MHz}$	100		300	MHz
Collector output capacitance	C_{ob}	$V_{\text{CB}}=10\text{V}, I_{\text{E}}=0, f=1\text{MHz}$			6	pF

*Pulse test: pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2.0\%$.CLASSIFICATION OF $h_{\text{FE}(1)}$

RANK	L	H
RANGE	100-200	200-300






Typical Characteristics

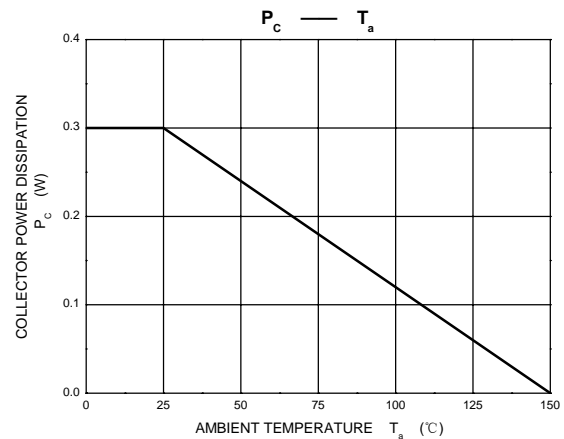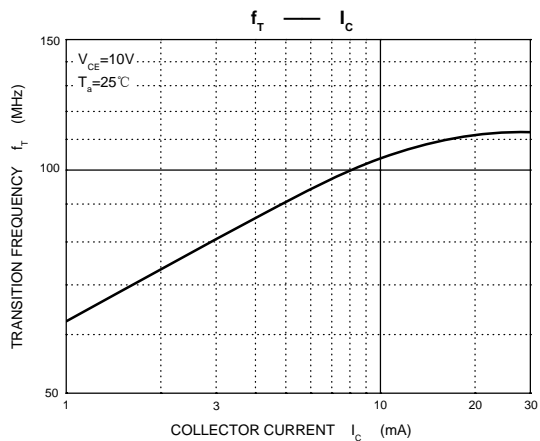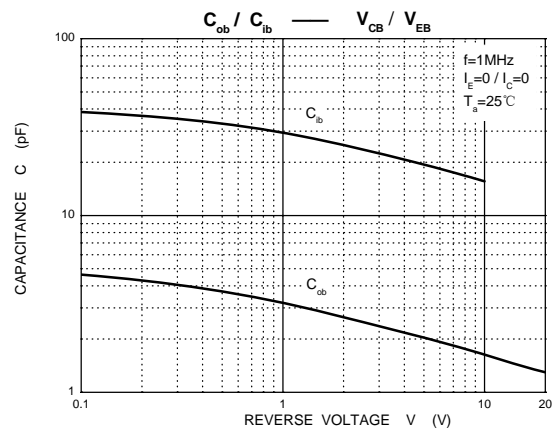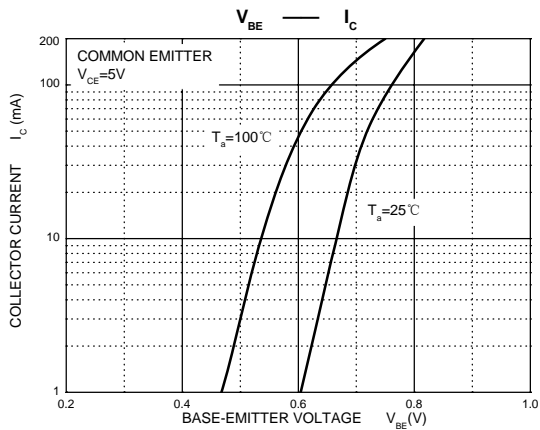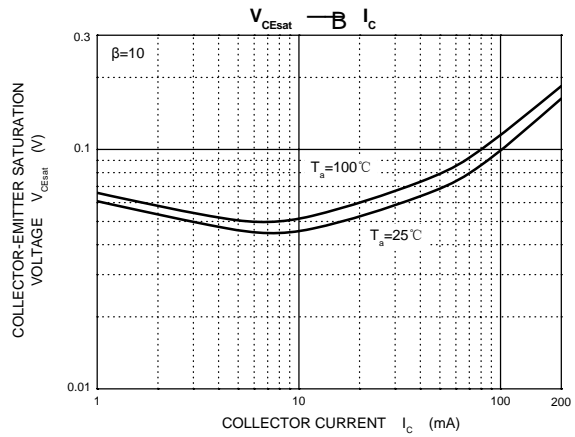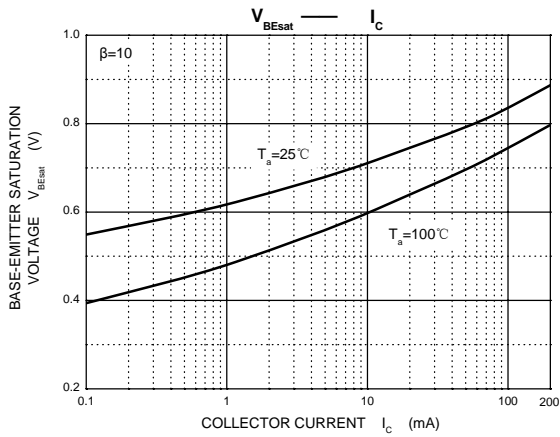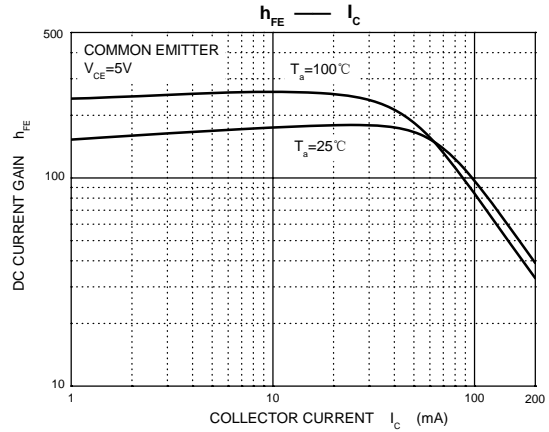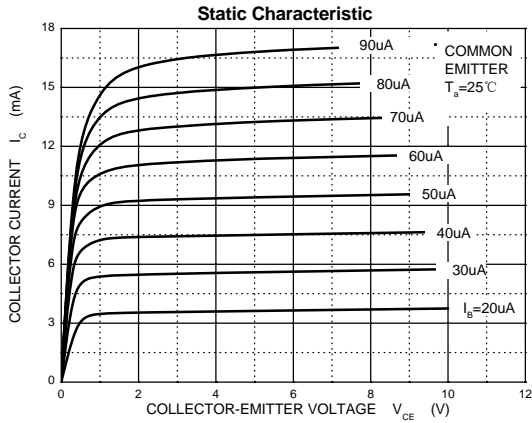




SOT-23 Package Outline Dimensions

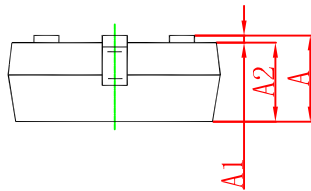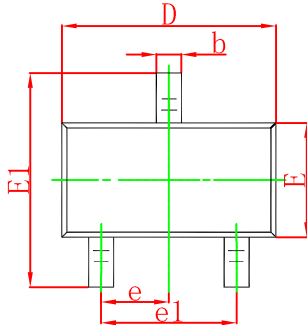

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout

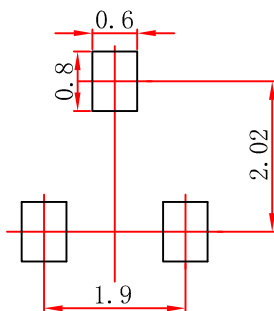

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05mm.
3. The pad layout is for reference purposes only.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [XZT manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#)