

DATA SHEET

WIRELESS COMPONENTS

Low Pass Filter
LPF1005LL50R2400A

2.4-2.5 GHz
1005 Series



FEATURES

- Compact size design
- RoHS compliant

APPLICATIONS

- WLAN,802.11b/g/n
- Bluetooth
- ISM Band

ORDERING INFORMATION

All part numbers are identified by the series, packing type, material, size, antenna type, working frequency and packing quantity.

PART NUMBER

LPF 1005 LL 50 R 2400A
 (1) (2) (3) (4) (5) (6)

(1) PRODUCT

LPF = Low Pass Filter

(2) SIZE

1005 = 1.0 × 0.5

(3) MATERIALS

Material Code LL

(4) TYPE

50 = Type 50

(5) PACKING STYLE

R = Tape and Reel

(6) WORKING FREQUENCY

2400 = 2.4 GHz

PHYCOMP CTC

CFL411171650245TK

I2NC

411171650245

SPECIFICATION

Table 1

DESCRIPTION	VALUE
Pass Band	2400 - 2500 MHz
Impedance	50Ω
Insertion Loss	0.5dB (Max) at 25°C
VSWR	2.0 (Max)
Attenuation	25dB Min@ 4800 ~ 5000MHz 20dB Min@ 7200 ~ 7500MHz
Operating Temperature	-40 ~ 85 °C

DIMENSIONS

Table 2 Machinical Dimension

	DIMENSION
L (mm)	1.00 ± 0.10
W (mm)	0.50 ± 0.10
T (mm)	0.35 ± 0.10
P1 (mm)	0.30 ± 0.15
P2 (mm)	0.30 ± 0.15
P3 (mm)	0.30 ± 0.15
P4 (mm)	0.30 ± 0.15
D1 (mm)	0.15 ± 0.10
D2 (mm)	0.35 ± 0.15

OUTLINES



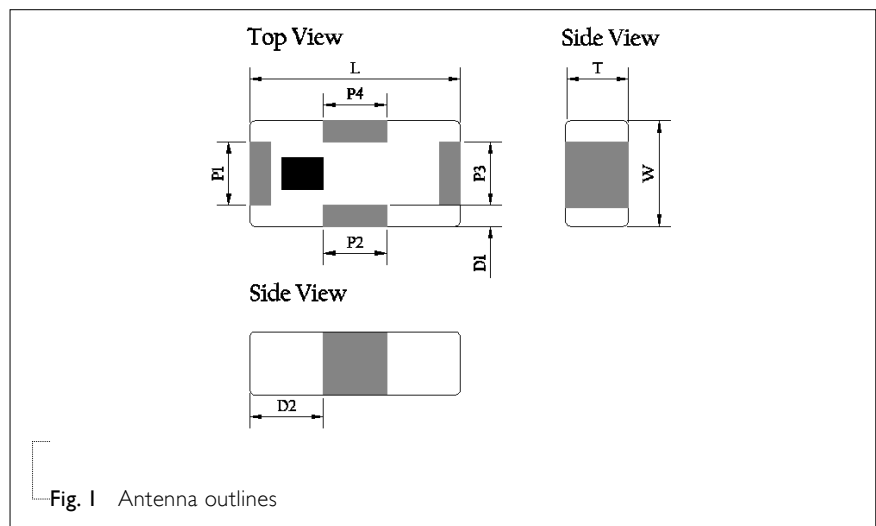


Table 3 Termination configuration

TERMINAL NAME	FUNCTION
P1	Input
P2	GND
P3	Output
P4	GND

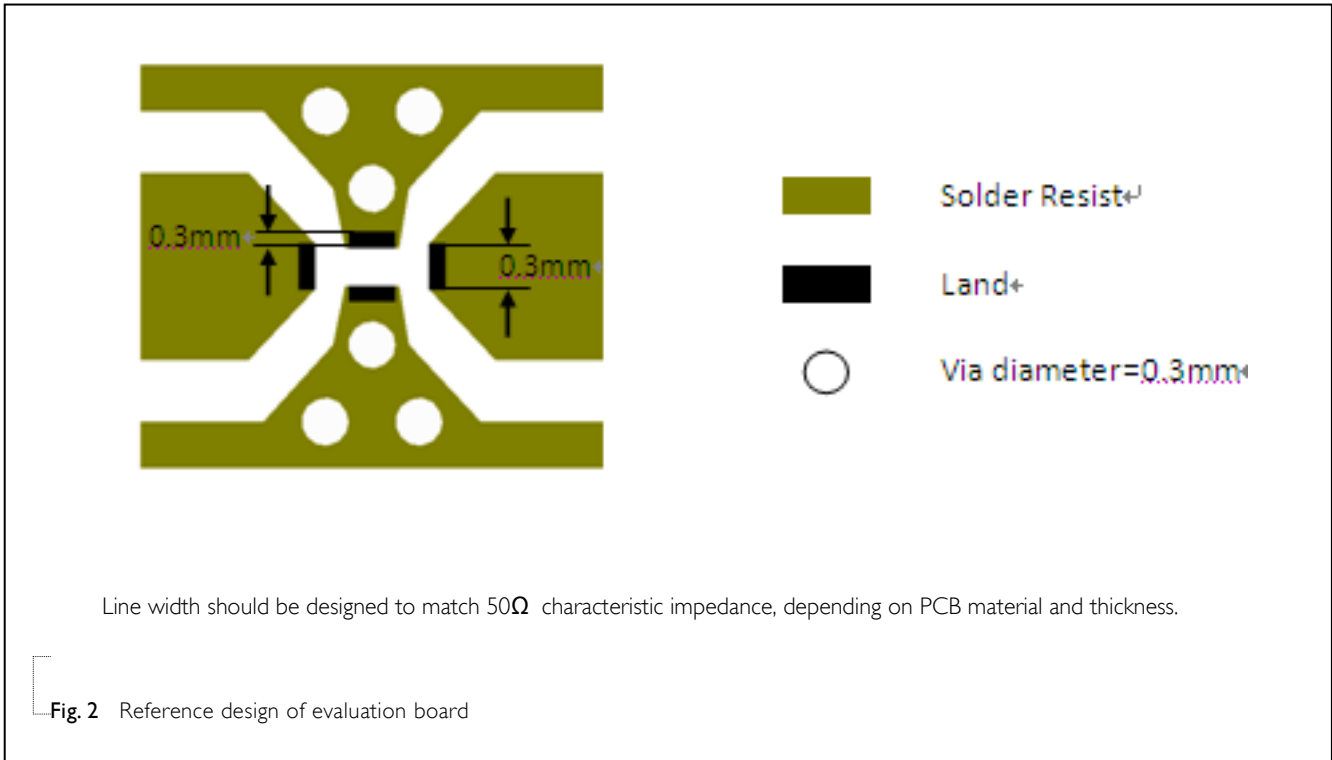

ELECTRICAL PERFORMANCES

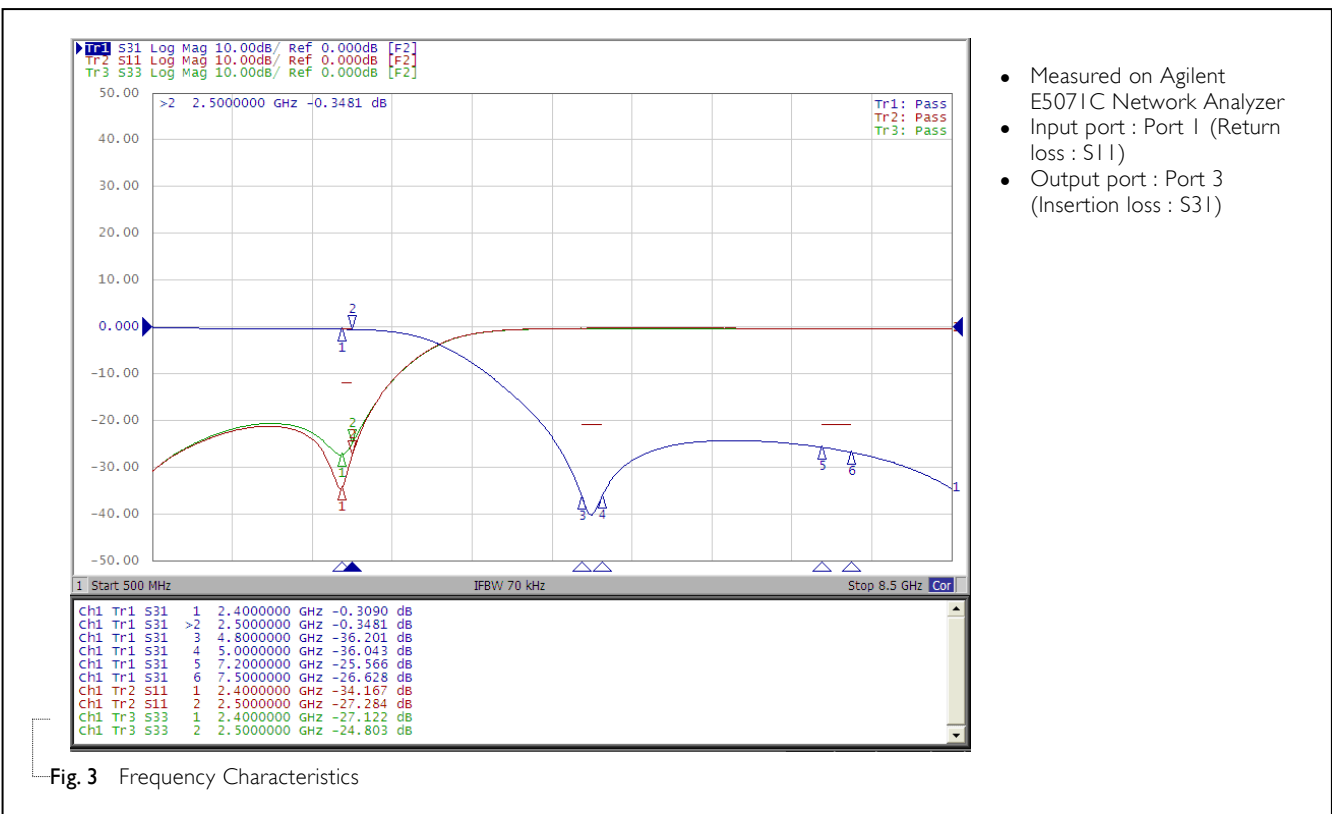

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 0	Jul.7 , 2016	-	- New data sheet for Low Pass Filter, 2.4 GHz application, 1005 series

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning category](#):

Click to view products by [Yageo manufacturer](#):

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [JP510S](#) [LFB322G45SN1A504](#)
[SF2159E](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [JHS-115-PIN](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#)
[LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#) [RF1353C](#) [051157-0000](#)
[PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [2020-6622-20](#) [TP-103-PIN](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#)
[2450DP39K5400E](#) [BD1722J50200AHF](#) [DSS-113-PIN](#) [MACP-008125-CK07F0](#) [DS-329-PIN](#) [DS-313-PIN](#) [M38510/10304BCA](#) [TP-104-PIN](#)
[856019](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#) [CHS-134-PIN](#) [CHE1260-QAG](#) [11305-10](#) [5962-9091202MXA](#) [3A412S](#)