


Door mount

HET200VC series

Dimension drawing

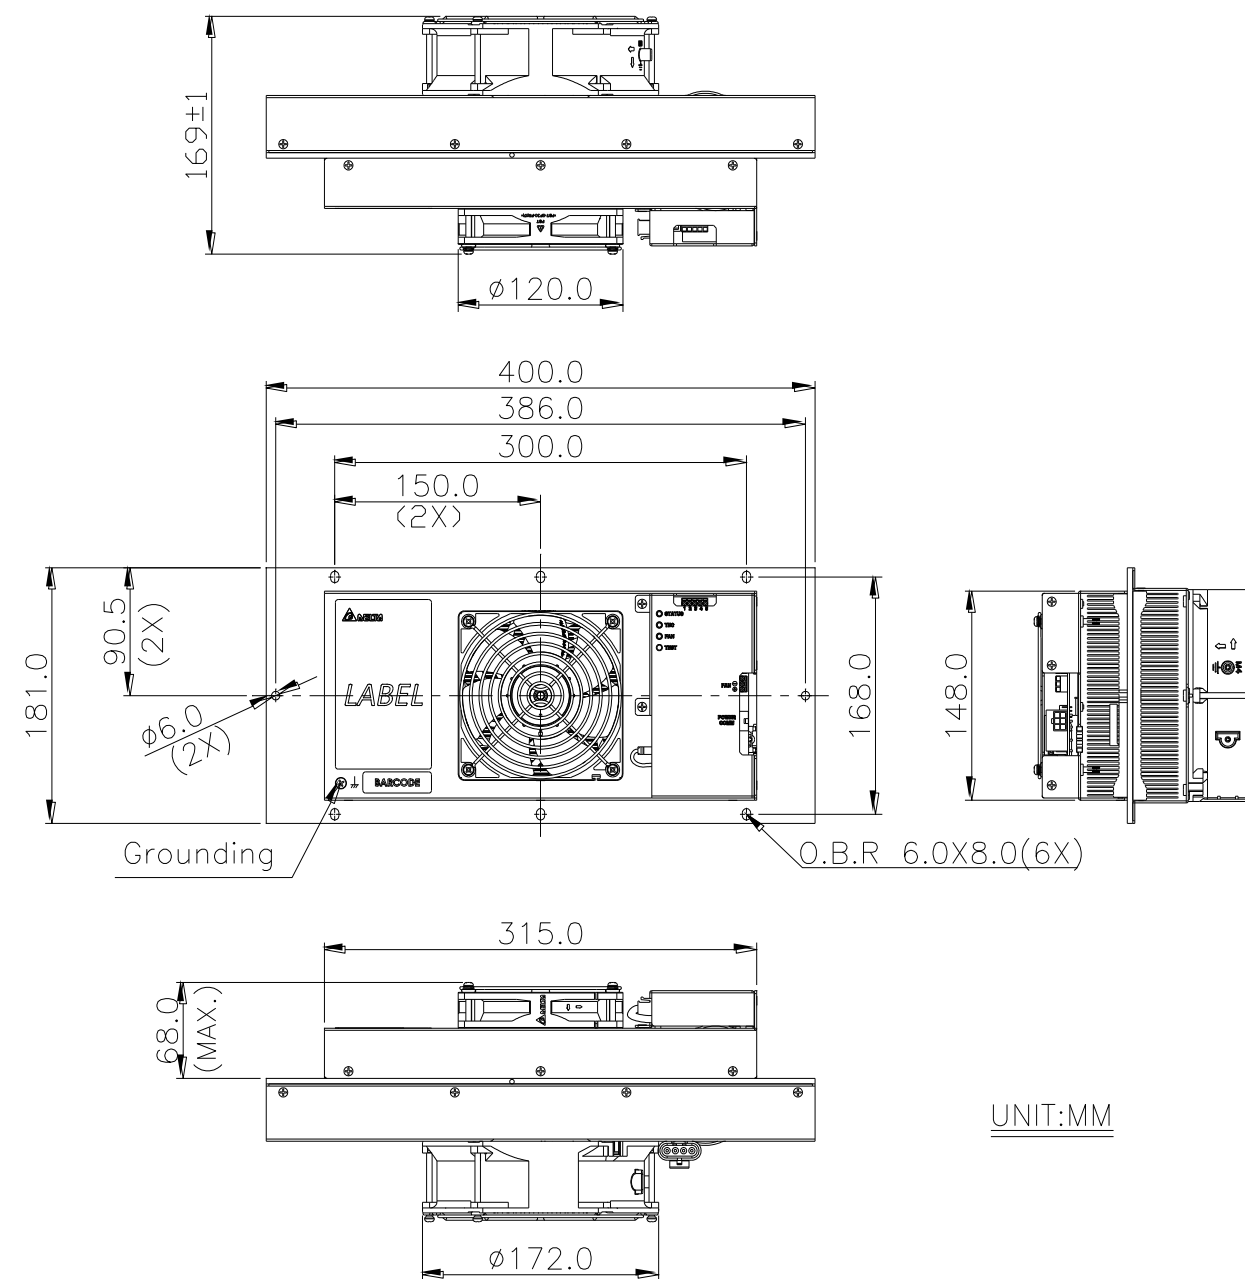

Features

- ◆ IP55 waterproof at external side
- ◆ FAN / TEC / Control fail alarm
- ◆ Clear LED status indicator
- ◆ Standalone temperature control
- ◆ High efficiency and reliable fan modules

Design

- ◆ High efficiency of cooling & Heating
- ◆ Thermal electric cooling module
- ◆ Rated voltage at 24V
- ◆ Built-in controller

Main feature	Unit	Model Number
		HET200VC
Outline dimension	mm	400 H x 181 W x 169 D
Weight	Kg	6.0 ± 0.5
Cooling capacity ($\Delta T = 0^{\circ}C$)	W	200
Heating capacity @-40° C	W	225
Rated voltage	VDC	24 (TYP.)
Operating voltage range	VDC	20-28
Actuality Current	A	12A(TYP.)
Power Consumption	W	288
Operating temperature	°C	-40~55
Internal airflow rate	CFM	85 (TYP.)
External airflow rate		115 (TYP.)
Acoustic noise at 1M : (Sound pressure)	dB-A	61.0 dB-A(Typ.)
		65.0(Max.)

* Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Racks & Rack Cabinet Accessories](#) category:

Click to view products by [Delta](#) manufacturer:

Other Similar products are found below :

[CR-1727](#) [M00-PLN](#) [F2420](#) [F2424](#) [8310-1032-SS](#) [9104](#) [PLFF2000](#) [PLFF6000](#) [GP216](#) [PTFA60000LG](#) [H-9163-B](#) [AC220-84-1](#) [HEH050BA](#)
[1427C3](#) [BAS-5104](#) [N-700-2](#) [190-002](#) [HTL10](#) [HTS10](#) [PC-118](#) [PC-780L](#) [PC-79](#) [PC-800](#) [SC4-28](#) [F3024](#) [AKWAMT](#) [PLFF1000](#) [GRPB12PG](#)
[CG3-340S/12](#) [2CWDP36](#) [2CWDP48](#) [2SSHINGE](#) [CP-001BK](#) [CPL19431LG1](#) [R570-004-107](#) [M6123-4007-SS](#) [TS170](#) [531300535](#) [BRX-](#)
[12290](#) [C4BD3077SBK1](#) [UPS 7-17-14 PLAIN](#) [LP40](#) [5261304-07](#) [CCA26-44-01](#) [706-102](#) [CG3-160G](#) [7112C-PLN ALUM](#) [CM10](#) [TS81](#) [7142](#)