


## 78L05

### ■ Three-Terminal Positive Voltage Regulator

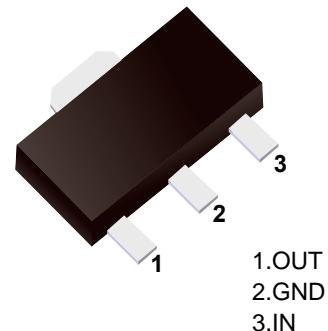

#### ■ Features

- Maximum Output current  $I_o$ : 0.1A
- Output Voltage  $V_o$ : 5V
- Continuous Total Dissipation  $P_D$ : 0.5W ( $T_a = 25^\circ C$ )

#### ■ Simplified outline(SOT-89)


#### ■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Rating	Unit
Input Voltage	$V_I$	30	V
Operating Junction Temperature Range	$T_{OPR}$	-55 ~ +125	°C
Storage Temperature Range	$T_{STG}$	-55 ~ +150	°C

#### ■ Electrical Characteristics ( $V_I=10V$ , $I_o=40mA$ , $C_I=0.33\mu F$ , $C_O=0.1\mu F$ , unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	$V_o$	$T_J = 25^\circ C$	4.8	5.0	5.2	V
		$T_J = 0 \sim 125^\circ C$ , $7V \leq V_I \leq 20V$ , $I_o=1mA \sim 40mA$	4.75	5.0	5.25	V
		$T_J = 0 \sim 125^\circ C$ , $I_o=1mA \sim 70mA$	4.75	5.0	5.25	V
Load Regulation	$\Delta V_o$	$T_J = 25^\circ C$ , $I_o=1mA \sim 100mA$		15	60	mV
		$T_J = 25^\circ C$ , $I_o=1mA \sim 40mA$		8	30	mV
Line Regulation	$\Delta V_o$	$7V \leq V_I \leq 20V$		32	150	mV
		$T_J = 25^\circ C$ , $8V \leq V_I \leq 20V$		26	100	mV
Quiescent Current	$I_Q$	$T_J = 25^\circ C$	3.8	6	mA	
Quiescent current Change	$\Delta I_Q$	$T_J = 0 \sim 125^\circ C$ , $8V \leq V_I \leq 20V$		1.5		mA
		$T_J = 0 \sim 125^\circ C$ , $1mA \leq I_o \leq 40mA$		0.1		mA
Output Noise Voltage	$V_N$	$T_J = 25^\circ C$ , $10Hz \leq f \leq 100KHz$		42		$\mu V$
Ripple Rejection	$RR$	$T_J = 0 \sim 125^\circ C$ , $8V \leq V_I \leq 20V$ , $f = 120Hz$	41	49		dB
Dropout Voltage	$V_D$	$T_J = 25^\circ C$		1.7		V







#### ■ Typical Application

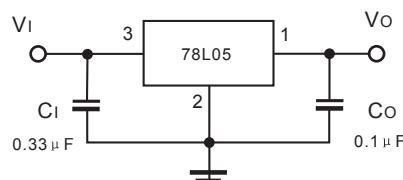


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

# 78L05

## ■ Typical Characteristics

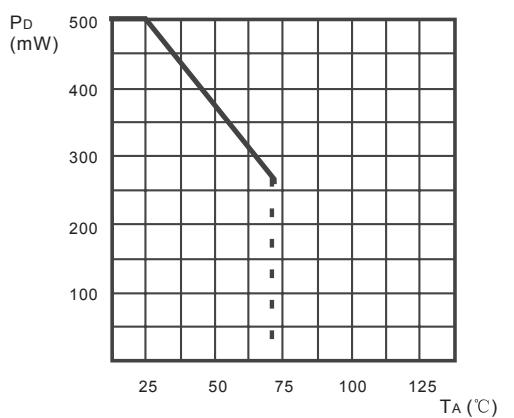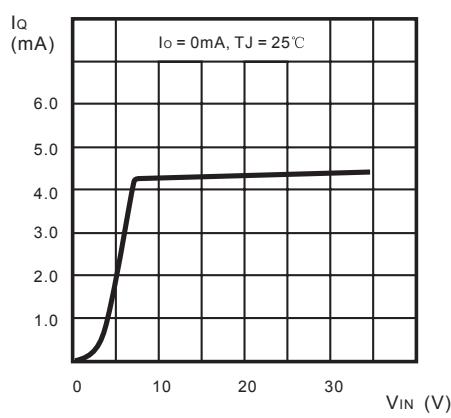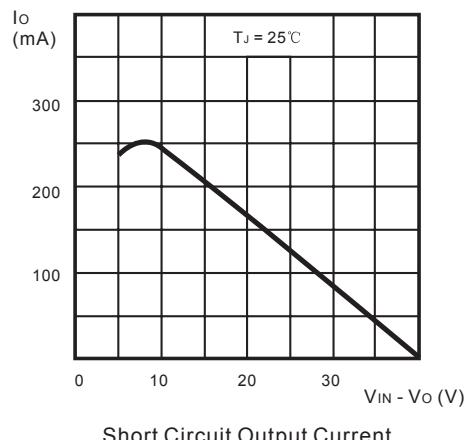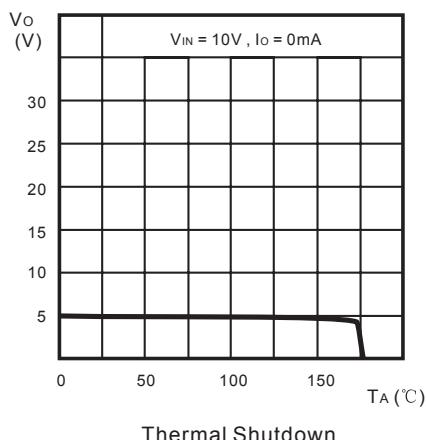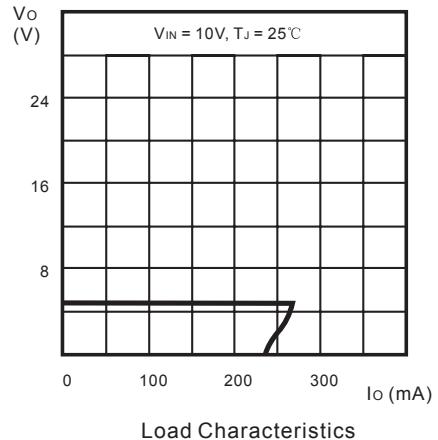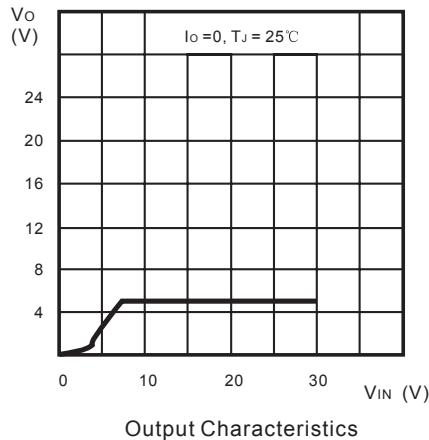

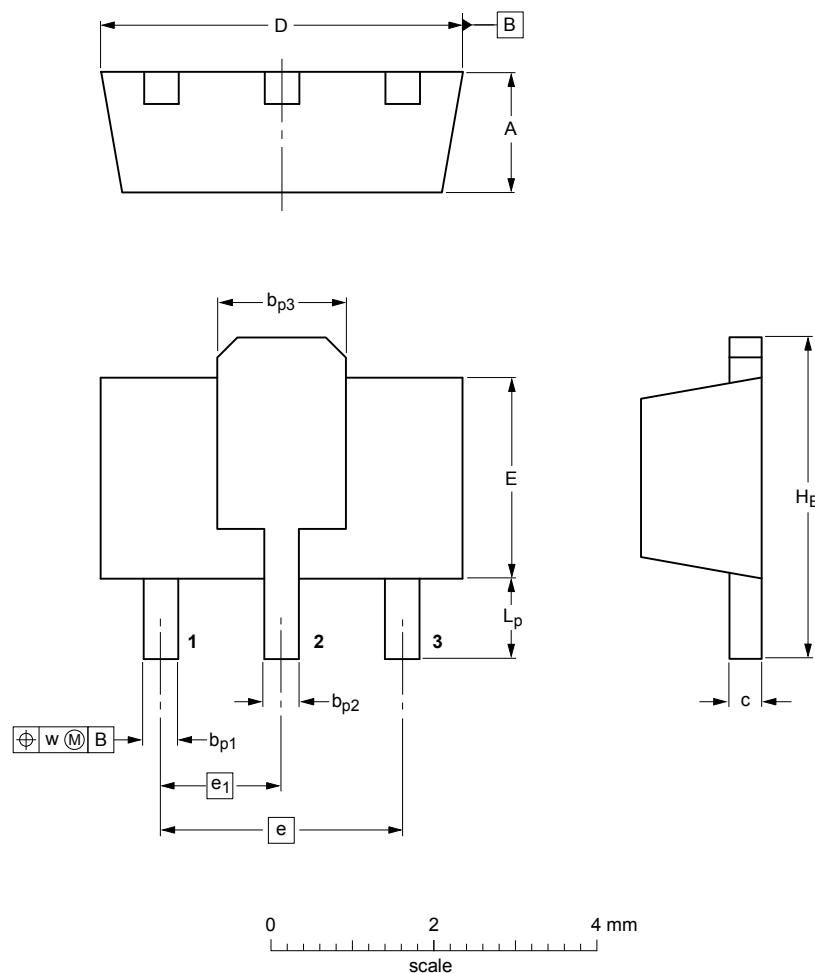**■ SOT-89**

**DIMENSIONS (mm are the original dimensions)**

UNIT	A	$b_{p1}$	$b_{p2}$	$b_{p3}$	c	D	E	e	$e_1$	$H_E$	$L_p$	w
mm	1.6 1.4	0.48 0.35	0.53 0.40	1.8 1.4	0.44 0.23	4.6 4.4	2.6 2.4	3.0	1.5	4.25 3.75	1.2 0.8	0.13

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Linear Voltage Regulators](#) category:***

***Click to view products by [YFSEMI](#) manufacturer:***

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [636416C](#) [714954EB](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L78M15CV-DG](#) [L79M05T-E](#) [TLS202A1MBVHTSA1](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [MP2018GZD-5-Z](#) [MP2018GZD-33-Z](#) [MIC5281-3.3YMM](#) [MC78L06BP-AP](#) [TA48LS05F\(TE85L,F\)](#) [TA78L12F\(TE12L,F\)](#) [TC47BR5003ECT](#) [TCR2LN12,LF\(S\)](#) [TCR2LN28,LF\(S\)](#) [TCR2LN30,LF\(S\)](#) [TCR3DF295,LM\(CT](#) [TCR3DF40,LM\(CT](#) [BA178M20CP-E2](#) [L78M12ABDT](#) [LM7812SX/NOPB](#) [LR645N3-G-P003](#) [LR645N3-G-P013](#) [ZXTR2005P5-13](#) [SCD7812BTG](#) [TCR3DF335,LM\(CT](#) [ZXTR2012K-13](#) [TLE42994E V33](#) [ZXTR2008K-13](#) [ZXTR2005K-13](#) [L88R05DL-E](#) [ADP3300ARTZ-2.7RL7](#) [LM120K-15/883](#) [IFX54441LDVXUMA1](#) [LM317D2T-TR](#)