

8A三象限双向可控硅 BTA08F-600/800

● **产品特征:**

NPNP 五层结构的硅双向器件;
P型对通扩散隔离;
台面玻璃纯化工艺;
背而多层金属电极;
工作结温高; 换向能力强;
高电压变化率dV/dt;
大电流变化率dI/dt;
符合Rohs规范.....



● **应用:**

加热控制器; 调光/调速控制器; 洗衣机; 搅拌机; 果汁机; 面包机; 吸尘器
等家用电器等等...



● **主要参数:**

符号	参数	数值	单位
$I_{T(RMS)}$	通态有效值电流	8	A
V_{DRM}/V_{RRM}	断态重复峰值电压	600/800	V
V_{TM}	导通压降	1.55	V

● **极限参数 ($T_{CASE}=25^{\circ}C$) :**

符号	参数	条件	数值	单位
V_{DRM}/V_{RRM}	断态重复峰值电压	$T_j=25^{\circ}C$	600/800	V
$I_{T(RMS)}$	通态均方根电流	TO-220F($T_c \leq 100^{\circ}C$), Fig, 1, 2	8	A
I_{TSM}	通态不重复浪涌电流	全正弦波, $T_j(\text{init})=25^{\circ}C, t_p=20\text{ms}; \text{Fig} 3, 5$	80	A
I^2t	I^2t 值	正弦波脉冲, $t_p=10\text{ms}$	36	A ² S
dI_T/dt	通态电流临界上升率	$I_G=2 \cdot I_{GT}, t_r \leq 10\text{ns},$ $F=120\text{Hz}, T_j=125^{\circ}C$	I - II - III 50	A/us
I_{GM}	门极峰值电流	$t_p=20\mu\text{s}, T_j=125^{\circ}C$	4	A
$P_{G(AV)}$	门极平均功率	$T_j=125^{\circ}C$	1	W
T_{STG}	存储温度		-40~+150	°C
T_j	工作结温		-40~+125	


●产品电性能

符号	参数	测试条件		数值			单位
				TW	SW	CW	
I_{GT}	门极触发电流	$V_D=12V, R_L=30\Omega, T_j=25^\circ C, \text{Fig.6}$	I - II - III	≤ 5	≤ 10	≤ 35	mA
V_{GT}	门极触发电压		I - II - III	≤ 1.3			V
V_{GD}	门极不触发电压	$V_D=V_{DRM}, T_j=125^\circ C, R_L=3.3K\Omega$		≥ 0.2			V
I_H	维持电流	$I_T=100mA, \text{Fig. 6}$		≤ 10	≤ 15	≤ 35	mA
I_L	擎住电流	$I_G=1.2I_{GT}, \text{Fig. 6}$	I - III	≤ 10	≤ 25	≤ 50	mA
			II	≤ 15	≤ 30	≤ 60	mA
dV_D/dt	断态电压临界上升率	$V_D=67\%V_{DRM}, \text{门极开路}, T_j=125^\circ C$		≥ 20	≥ 40	≥ 400	V/us
V_{TM}	通态压降	$I_{TM}=11A, t_p=380us, \text{Fig.4}$		≤ 1.55			V
I_{DRM} / I_{RRM}	断态重复峰值电流	$V_D=V_{DRM}/V_{RRM}, T_j=25^\circ C$		≤ 5	≤ 5	≤ 5	uA
		$V_D=V_{DRM}/V_{RRM}, T_j=125^\circ C$		≤ 1	≤ 1	≤ 1	mA

●热阻参数:

符号	参数	数值	单位
$R_{th(j-c)}$	结到管壳的热阻 (AC)	TO-220F(Ins)	2.5 $^\circ C/W$
$R_{th(j-a)}$	结到环境的热阻	TO-220F(Ins)	60 $^\circ C/W$

●产品标识:

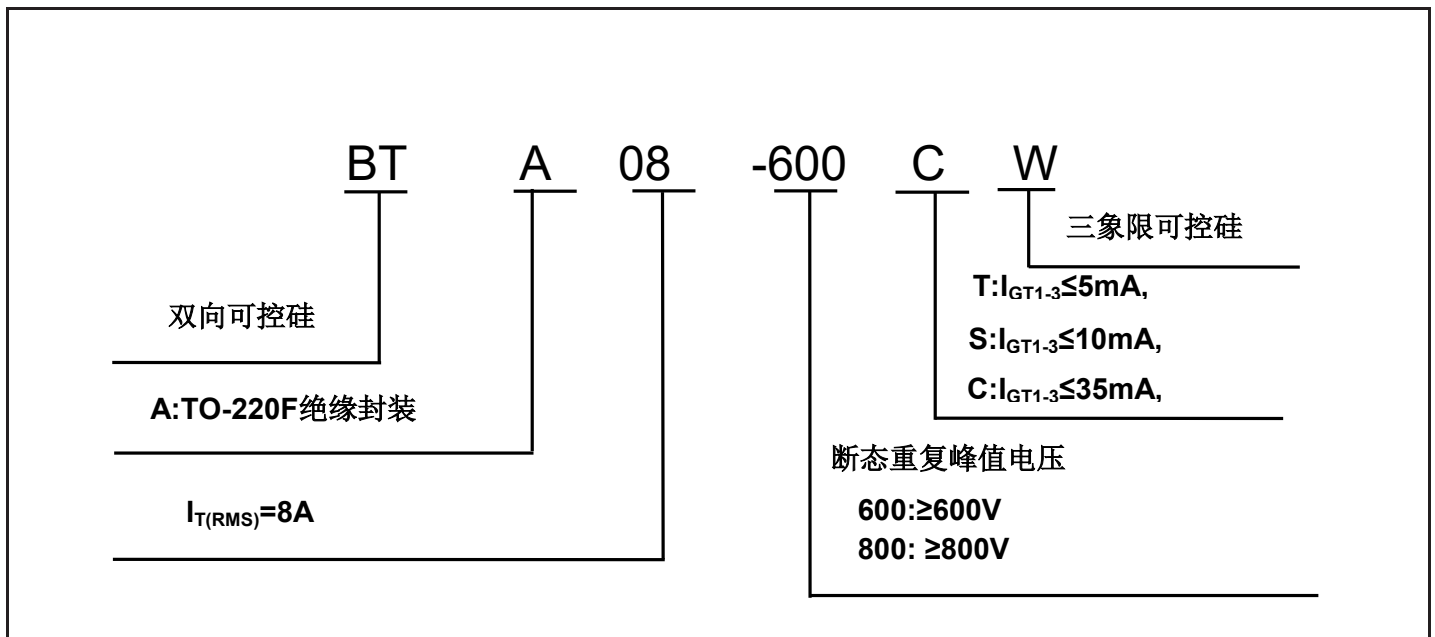

●参数特性曲线图:

FIG.1 最大功耗与均方根电流关系曲线图

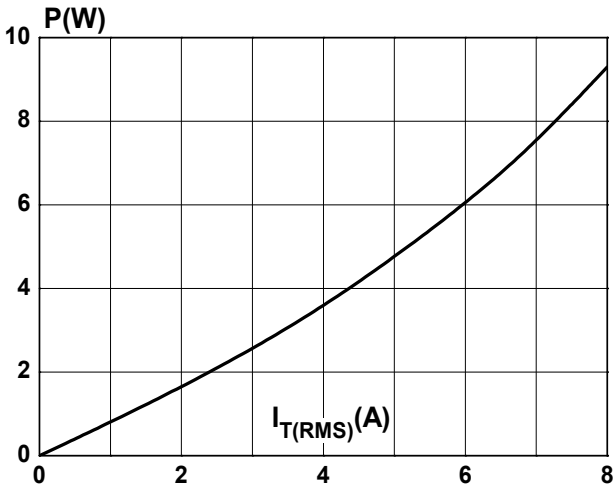


FIG.2:均方根电流与壳温关系曲线图

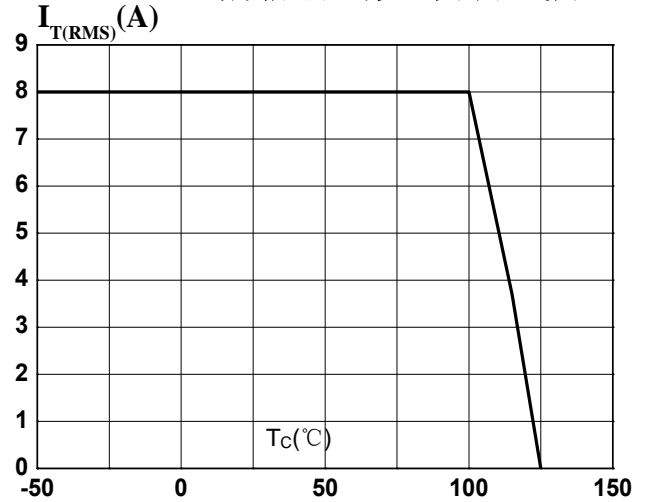


FIG.3: 峰值浪涌电流与周期数量关系图

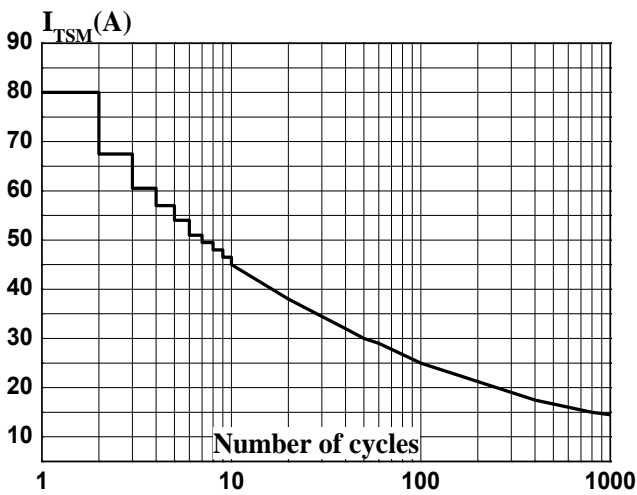


FIG.4: 输出特性图 (最大值图)

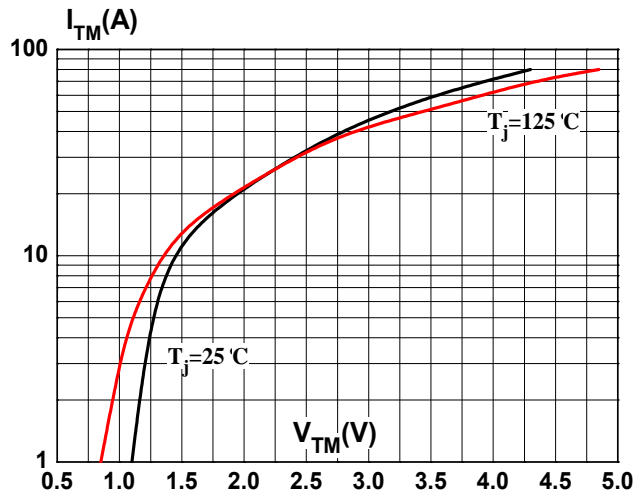


FIG.5: 非重复峰值浪涌电流与正弦波脉宽关系曲线



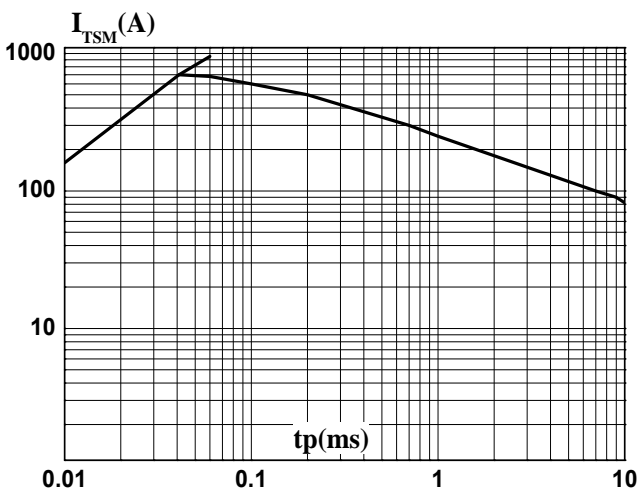


FIG.6: 门极触发电流、维持电流、擎住电流与结温关系曲线图

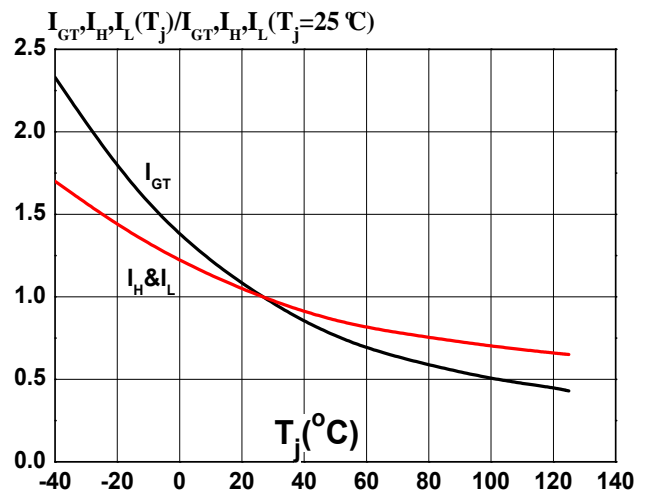

●封装外形:

TO-220F(Ins)

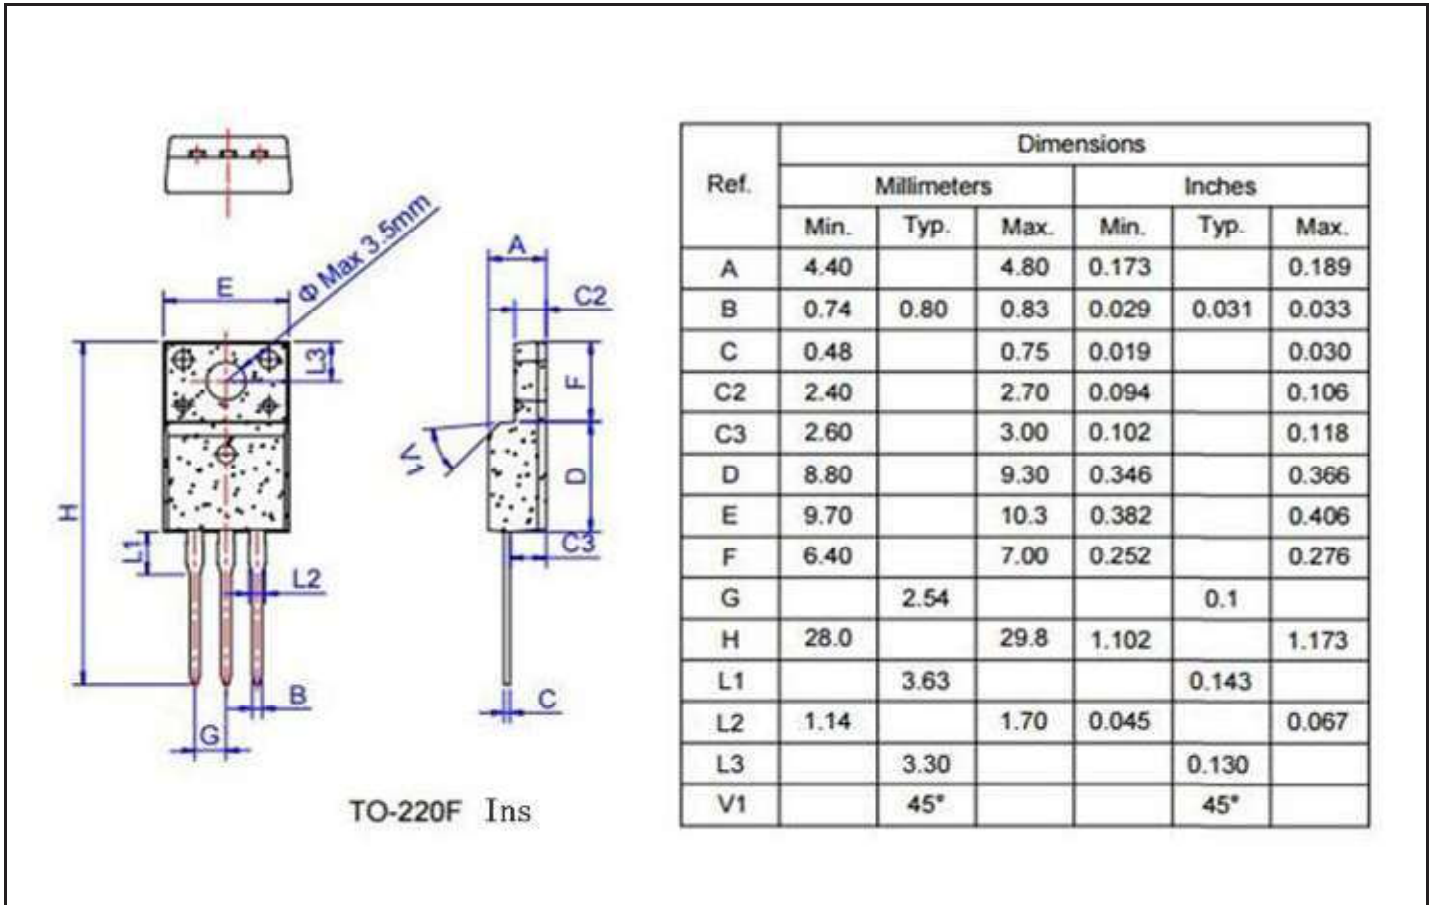

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Triacs](#) category:

Click to view products by [YFW Electronics](#) manufacturer:

Other Similar products are found below :

[BT137-600-0Q](#) [OT415Q](#) [2N6075A](#) [NTE5688](#) [BTA2008W-800D,135](#) [D31410](#) [ACS102-5T1](#) [ACS102-5TA](#) [MAC97A4G](#) [Z0107MAG](#)
[Z0107MARL1G](#) [Z0109MARLRPG](#) [MAC97A8-TA](#) [BT131W-800](#) [BT138S-800E](#) [BT137S-800E](#) [BT136S-600D](#) [BTA08-600TWRG](#)
[X0405MF-252](#) [MAC97A8-23-3L](#) [MCR100-8-23-3L](#) [BTA24-800B](#) [BT151-600R](#) [BT131](#) [BTA41-1200B](#) [MCR16](#) [MCR100-8](#) [MCR16](#)
[BT131-800D](#) [BT134-800E](#) [BT138-800E](#) [MCR100-8](#) [BTA12-800BWRG\(UMW\)](#) [BTA24-600BWRG\(UMW\)](#) [BTA24-800BWRG\(UMW\)](#)
[BTA12-600BWRG\(UMW\)](#) [BTA16-600CRG\(UMW\)](#) [BTA12-600CRG\(UMW\)](#) [BS61089B-8](#) [BT134W-600E](#) [BT134-600E](#) [JR0405S3](#)
[BCR12PM](#) [MAC97A6](#) [BTA24-800CRG\(UMW\)](#) [BTA16-600BRG\(UMW\)](#) [BTA16-800BWRG\(UMW\)](#) [Z0109-NN](#) [BTA41](#) [MCR100-8U](#)