

Current Regulative Diode
Surface Mount - 15-80mA

Description

CRD is diode which supplies constant current to an electric circuit, even when power supply voltage fluctuations or load impedance fluctuations occur. CRD is used for current stabilization and current limiting.

Features

- ◆ Silicon technology
- ◆ Low power loss
- ◆ high efficiency
- ◆ Eliminate voltage overshoot
- ◆ Epoxy resin package
- ◆ Will not fatigue
- ◆ RoHS Compliant

Echanical Characteristics

- ◆ Package: SOD-123FL
- ◆ Lead Finish: Matte Tin
- ◆ Case Material: Epoxy Molding Compound.
- ◆ UL Flammability Classification Rating 94V-0
- ◆ Moisture Sensitivity: Level 1 per J-STD-020

Absolute Maximum Ratings


Parameter	Symbol	Value	Units
Operating Temperature Range	T _J	-55 to 150	°C
Storage Temperature Range	T _{STG}	-55 to 150	°C

Marking Information



CRDxxx = Marking Code

Pin Configuration




Electrical Characteristics (TA=25°C unless otherwise noted)


Part Number	Marking Code	Pinch-Off Current $I_P @ V=20V$		Active Voltage V_K	Max. Voltage Loading $V_B \text{ max}$	Max. Power Loading P_D
		min	max	$V_K @ 0.8I_{Pmin}$	$V_B @ 1.1I_{Pmax}$	max
		[mA]	[mA]	Max [V]	[V]	[w]
CRD015D	015D	12	18	3.2	190	1.2
CRD020D	020D	16	24	3.5	190	1.2
CRD025D	025D	22.5	27.5	4.0	190	1.2
CRD030D	030D	27	33	4.8	190	1.2
CRD040D	040D	36	44	6.0	190	1.2
CRD060D	060D	54	66	7.0	190	1.2
CRD080D	080D	72	88	8.0	190	1.2

Package Outline

SOD-123FL

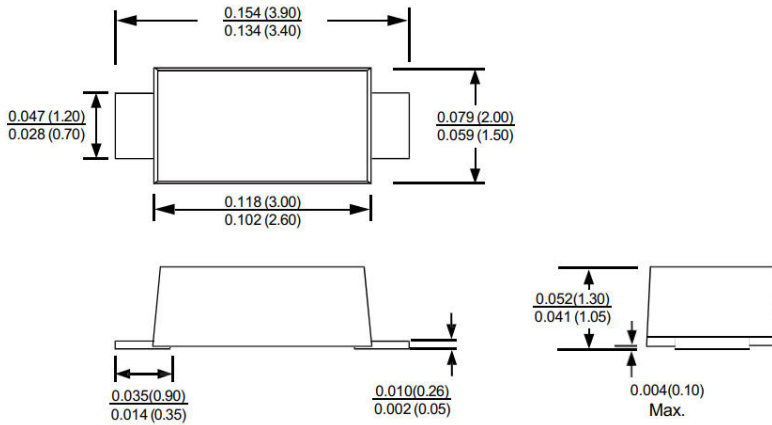

Mounting Pad Layout



Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
SOD-123FL	Tape/Reel,13"reel	10000	EIA-481-1
	Tape/Reel,7"reel	3000	EIA-481-1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [YFW Electronics manufacturer:](#)

Other Similar products are found below :

[MMBD3004S-13-F](#) [1N3611](#) [NTE156A](#) [NTE6244](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [1N4449](#) [1N456A](#) [1N914BTR](#)
[D291S45T](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#)
[IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [SMMSD4148T3G](#) [BYW95B/A52A](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [BAV70HDW-7](#)
[BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [1SS388-TP](#) [BAV99TQ-13-F](#) [BAV99HDW-13](#) [1N4004](#)
[MMDB30-E28X](#) [LS4148](#) [IDV15E65D2](#) [W0503RH200S0L](#) [W0503SH200S0L](#) [M0268SJ200NLF](#) [M0268RJ200NLF](#) [S3MBF](#) [US1J](#)
[DAN217U-TP](#) [SHV-06JNS-Q](#) [IDW30C65D1](#) [IDW80C65D1](#) [VS-HFA30TA60CSR-M3](#) [M1MA152WAT1](#)