


Plastic-Encapsulate Transistors

Applications

Linear and switching industrial application

Features

Complementary to MJD32C

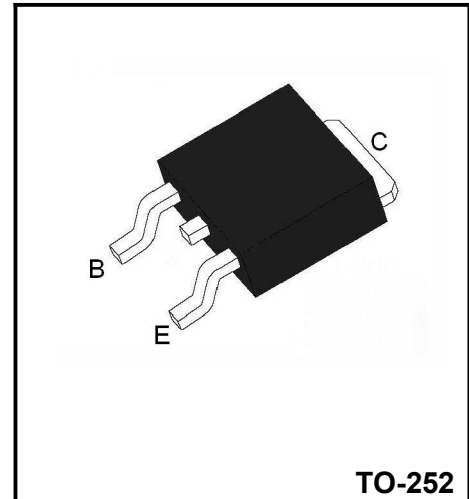

Absolute Maximum Rating (Ta=25°C)

Parameter		Symbol	Value	Unit
Collector-Base Voltage		BV_{CBO}	100	V
Collector-Emitter Voltage		BV_{CEO}	100	V
Emitter-Base Voltage		BV_{EBO}	5	V
Collector Current(DC)		I_C	3	A
Collector peak current		I_{CM}	5	A
Collector Dissipation	Ta =25 °C	P_C	2	W
	Tc =25 °C		40	
Junction Temperature		T_j	150	°C
Storage Temperature		T_{stg}	-65~150	°C

Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C = 30mA, I_B = 0$	100			V
Collector cut-off current	I_{CEO}	$V_{CE} = 60V, I_E = 0$			0.3	mA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5V, I_E = 0$			1	mA
Collector cut-off current	I_{CES}	$V_{CE} = 100V, V_{BE} = 0$			0.2	mA
DC current gain*	h_{FE}	$V_{CE} = 4V, I_C = 1A$	25		50	
		$V_{CE} = 4V, I_C = 3A$	10			
Collector-emitter saturation voltage*	$V_{CE(sat)}$	$I_C = 3A, I_B = 375mA$			1.2	V
Base-Emitter ON Voltage*	$V_{BE(on)}$	$V_{CE} = 4V, I_C = 3A$			1.8	V
Current Gain Bandwidth Product*	f_T	$V_{CE} = 10V, I_C = 500mA$	3.0			MHz

* Pulse Test : PW ≤ 300μs, Duty cycle ≤ 2%

Electrical Characteristics

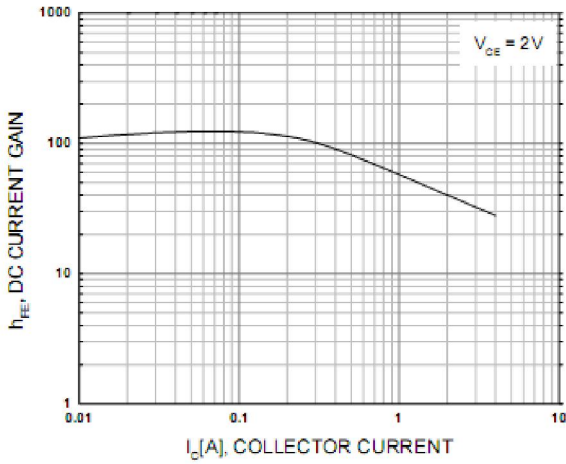
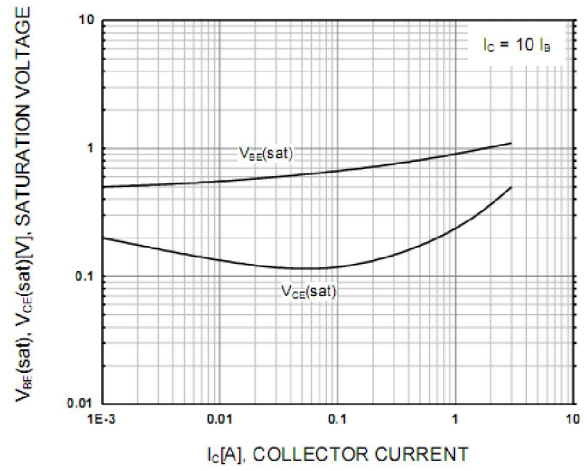


Figure 1. DC current Gain



**Figure 2. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage**

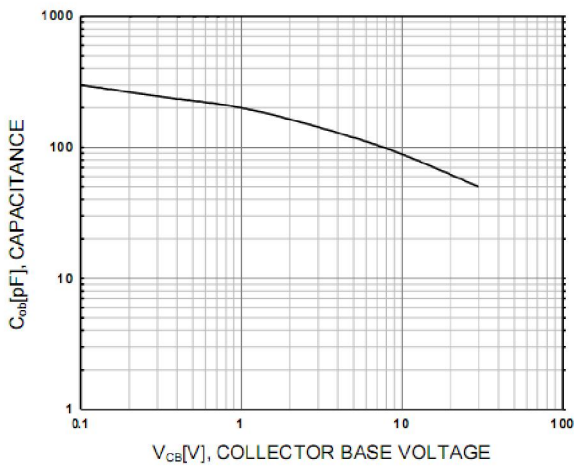


Figure 3. Collector Capacitance

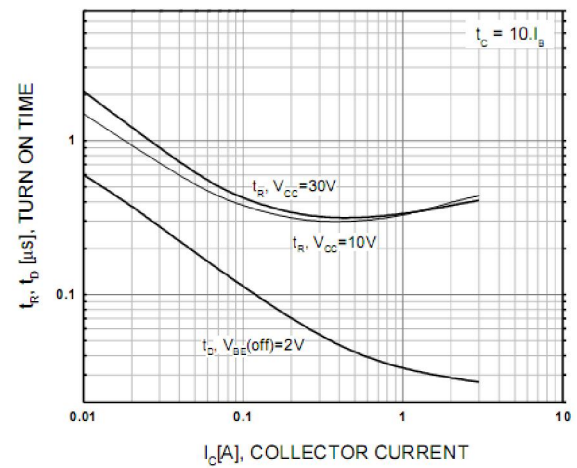


Figure 4. Turn On Time

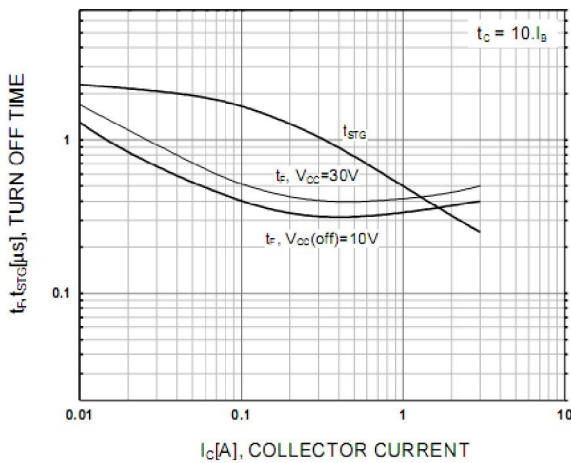


Figure 5. Turn Off Time


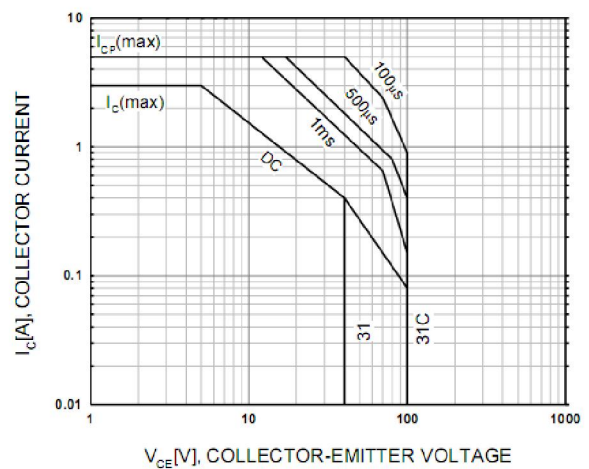


Figure 6. Safe Operating

Package Outline

TO-252

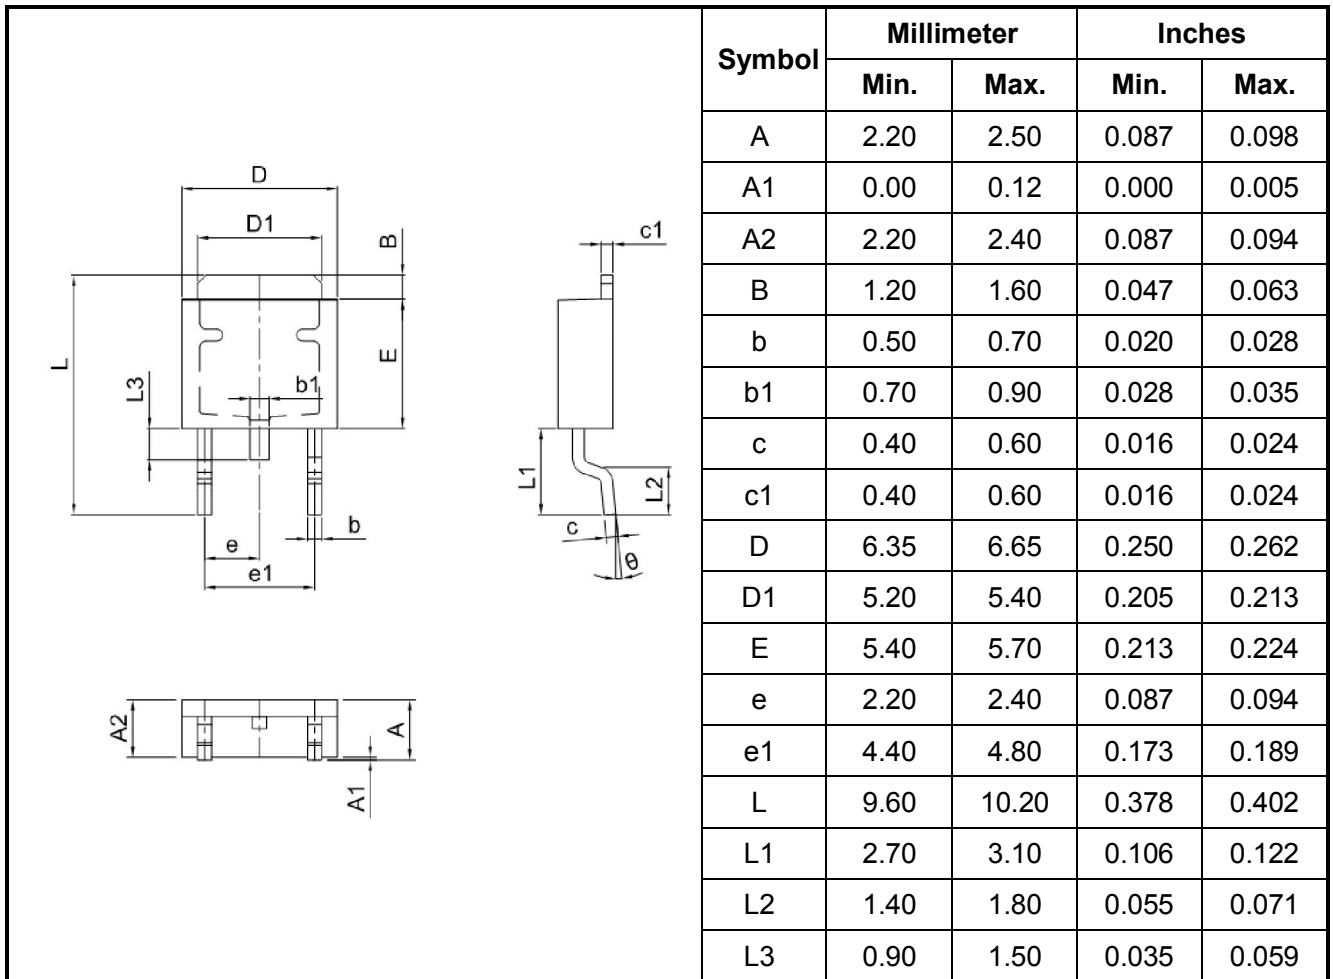

Product Specification Classification

Part Number	Package	Marking	Pack
MJD31C	TO-252	YFW MJD31C XXXXX	2500PCS/Tape

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [YFW Electronics manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)