



■ NPN / PNP Silicon Epitaxial Planar Transistors



1. Emitter 2. Base 3. Collector  
4. Emitter 5. Base 6. Collector

■ Simplified outline(SOT-363)

■ Q1 Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Collector Base Voltage	$V_{CBO}$	60	V
Collector Emitter Voltage	$V_{CEO}$	40	V
Emitter Base Voltage	$V_{EBO}$	6	V
Collector Current	$I_C$	200	mA

■ Q2 Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Collector Base Voltage	$-V_{CBO}$	40	V
Collector Emitter Voltage	$-V_{CEO}$	40	V
Emitter Base Voltage	$-V_{EBO}$	6	V
Collector Current	$-I_C$	200	mA

■ Q1Q2 Maximum Ratings ( $T_a = 25^\circ\text{C}$ )


Parameter	Symbol	Value	Unit
Total Power Dissipation	$P_{tot}$	200	mW
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 55 to + 150	$^\circ\text{C}$

**■ Q1 Electrical Characteristics at  $T_a = 25^\circ\text{C}$** 







Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at $V_{CE} = 1\text{ V}$ , $I_C = 0.1\text{ mA}$ at $V_{CE} = 1\text{ V}$ , $I_C = 1\text{ mA}$ at $V_{CE} = 1\text{ V}$ , $I_C = 10\text{ mA}$ at $V_{CE} = 1\text{ V}$ , $I_C = 50\text{ mA}$ at $V_{CE} = 1\text{ V}$ , $I_C = 100\text{ mA}$	$h_{FE}$ $h_{FE}$ $h_{FE}$ $h_{FE}$ $h_{FE}$	40 70 100 60 30	- - 300 - -	- - - - -
Collector Base Cutoff Current at $V_{CB} = 30\text{ V}$	$I_{CBO}$	-	50	nA
Emitter Base Cutoff Current at $V_{EB} = 6\text{ V}$	$I_{EBO}$	-	50	nA
Collector Base Breakdown Voltage at $I_C = 10\text{ }\mu\text{A}$	$V_{(BR)CBO}$	60	-	V
Collector Emitter Breakdown Voltage at $I_C = 1\text{ mA}$	$V_{(BR)CEO}$	40	-	V
Emitter Base Breakdown Voltage at $I_E = 10\text{ }\mu\text{A}$	$V_{(BR)EBO}$	6	-	V
Collector Emitter Saturation Voltage at $I_C = 10\text{ mA}$ , $I_B = 1\text{ mA}$ at $I_C = 50\text{ mA}$ , $I_B = 5\text{ mA}$	$V_{CE(sat)}$ $V_{CE(sat)}$	- -	0.2 0.3	V V
Base Emitter Saturation Voltage at $I_C = 10\text{ mA}$ , $I_B = 1\text{ mA}$ at $I_C = 50\text{ mA}$ , $I_B = 5\text{ mA}$	$V_{BE(sat)}$ $V_{BE(sat)}$	0.65 -	0.85 0.95	V V
Current Gain Bandwidth Product at $V_{CE} = 20\text{ V}$ , $I_C = 10\text{ mA}$ , $f = 100\text{ MHz}$	$f_T$	300	-	MHz
Collector Output Capacitance at $V_{CB} = 5\text{ V}$ , $I_E = 0$ , $f = 1\text{ MHz}$	$C_{ob}$	-	4	pF
Delay Time at $V_{CC} = 3\text{ V}$ , $V_{BE} = 0.5\text{ V}$ , $I_C = 10\text{ mA}$ , $I_{B1} = 1\text{ mA}$	$t_d$	-	35	ns
Rise Time at $V_{CC} = 3\text{ V}$ , $V_{BE} = 0.5\text{ V}$ , $I_C = 10\text{ mA}$ , $I_{B1} = 1\text{ mA}$	$t_r$	-	35	ns
Storage Time at $V_{CC} = 3\text{ V}$ , $I_C = 10\text{ mA}$ , $I_{B1} = -I_{B2} = 1\text{ mA}$	$t_s$	-	200	ns
Fall Time at $V_{CC} = 3\text{ V}$ , $I_C = 10\text{ mA}$ , $I_{B1} = -I_{B2} = 1\text{ mA}$	$t_f$	-	50	ns

■ Q2 Electrical Characteristics at  $T_a = 25^\circ\text{C}$


Parameter	Symbol	Min.	Max.	Unit
DC Current Gain				
at $-V_{CE} = 1\text{ V}$ , $-I_C = 0.1\text{ mA}$	$h_{FE}$	60	-	-
at $-V_{CE} = 1\text{ V}$ , $-I_C = 1\text{ mA}$	$h_{FE}$	80	-	-
at $-V_{CE} = 1\text{ V}$ , $-I_C = 10\text{ mA}$	$h_{FE}$	100	300	-
at $-V_{CE} = 1\text{ V}$ , $-I_C = 50\text{ mA}$	$h_{FE}$	60	-	-
at $-V_{CE} = 1\text{ V}$ , $-I_C = 100\text{ mA}$	$h_{FE}$	30	-	-
Collector Base Cutoff Current at $-V_{CB} = 30\text{ V}$	$-I_{CBO}$	-	50	nA
Emitter Base Cutoff Current at $-V_{EB} = 6\text{ V}$	$-I_{EBO}$	-	50	nA
Collector Base Breakdown Voltage at $-I_C = 10\text{ }\mu\text{A}$	$-V_{(BR)CBO}$	40	-	V
Collector Emitter Breakdown Voltage at $-I_C = 1\text{ mA}$	$-V_{(BR)CEO}$	40	-	V
Emitter Base Breakdown Voltage at $-I_E = 10\text{ }\mu\text{A}$	$-V_{(BR)EBO}$	6	-	V
Collector Emitter Saturation Voltage at $-I_C = 10\text{ mA}$ , $-I_B = 1\text{ mA}$	$-V_{CE(sat)}$	-	0.25	V
at $-I_C = 50\text{ mA}$ , $-I_B = 5\text{ mA}$	$-V_{CE(sat)}$	-	0.4	V
Base Emitter Saturation Voltage at $-I_C = 10\text{ mA}$ , $-I_B = 1\text{ mA}$	$-V_{BE(sat)}$	0.65	0.85	V
at $-I_C = 50\text{ mA}$ , $-I_B = 5\text{ mA}$	$-V_{BE(sat)}$	-	0.95	V
Current Gain Bandwidth Product at $-V_{CE} = 20\text{ V}$ , $-I_C = 10\text{ mA}$ , $f = 100\text{ MHz}$	$f_T$	250	-	MHz
Output Capacitance at $-V_{CB} = 5\text{ V}$ , $I_E = 0$ , $f = 1\text{ MHz}$	$C_{obo}$	-	4.5	pF
Delay Time at $-V_{CC} = 3\text{ V}$ , $-V_{BE} = 0.5\text{ V}$ , $-I_C = 10\text{ mA}$ , $-I_{B1} = 1\text{ mA}$	$t_d$	-	35	ns
Rise Time at $-V_{CC} = 3\text{ V}$ , $-V_{BE} = 0.5\text{ V}$ , $-I_C = 10\text{ mA}$ , $-I_{B1} = 1\text{ mA}$	$t_r$	-	35	ns
Storage Time at $-V_{CC} = 3\text{ V}$ , $-I_C = 10\text{ mA}$ , $-I_{B1} = I_{B2} = 1\text{ mA}$	$t_s$	-	225	ns
Fall Time at $-V_{CC} = 3\text{ V}$ , $-I_C = 10\text{ mA}$ , $-I_{B1} = I_{B2} = 1\text{ mA}$	$t_f$	-	75	ns

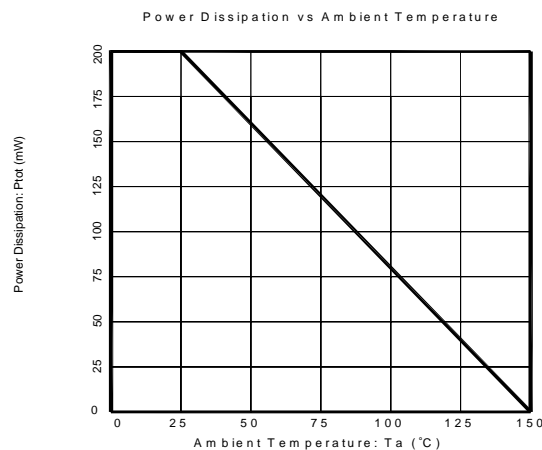


**Q1(NPN transistor)**

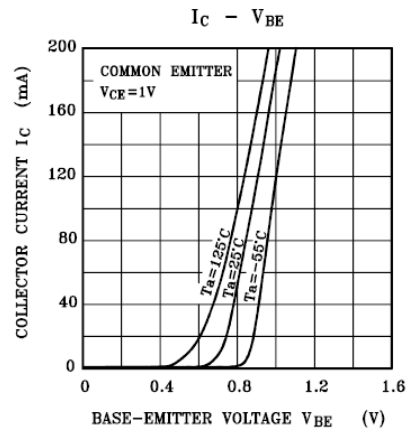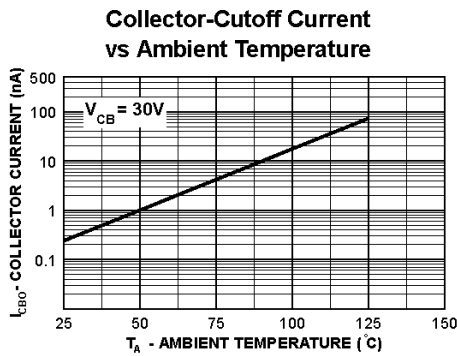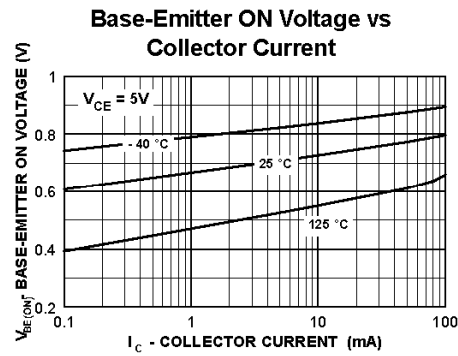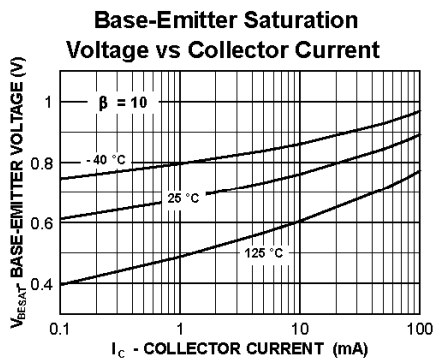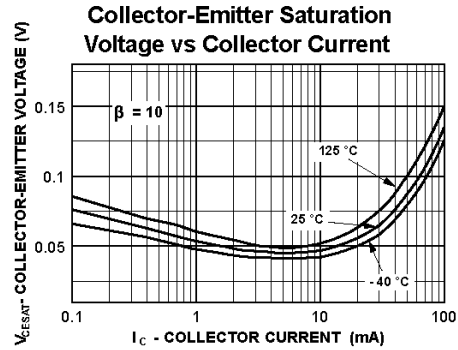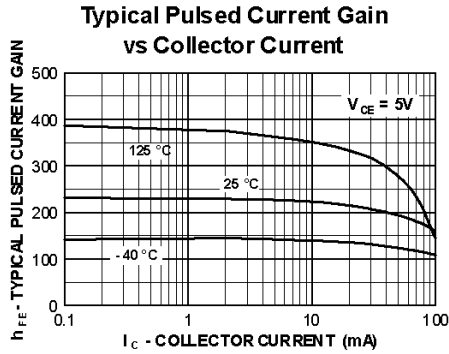


**Q2(PNP transistor)**

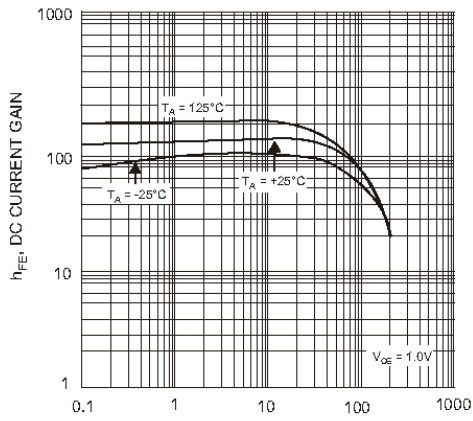

Typical DC Current Gain vs Collector Current

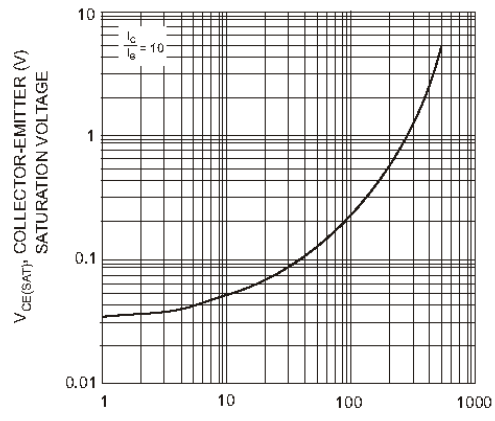



Typical Collector-Emitter Saturation Voltage vs. Collector Current

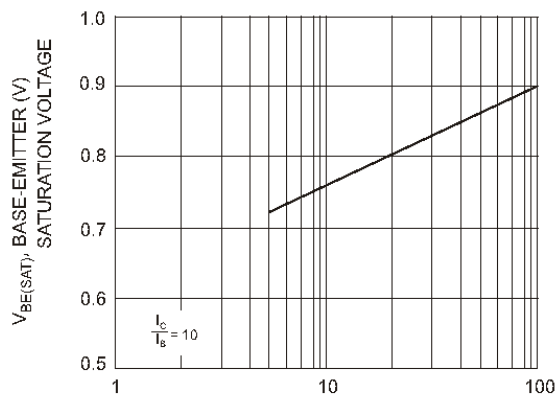

Typical Base-Emitter Saturation Voltage vs. Collector Current

Package Outline

SOT-363

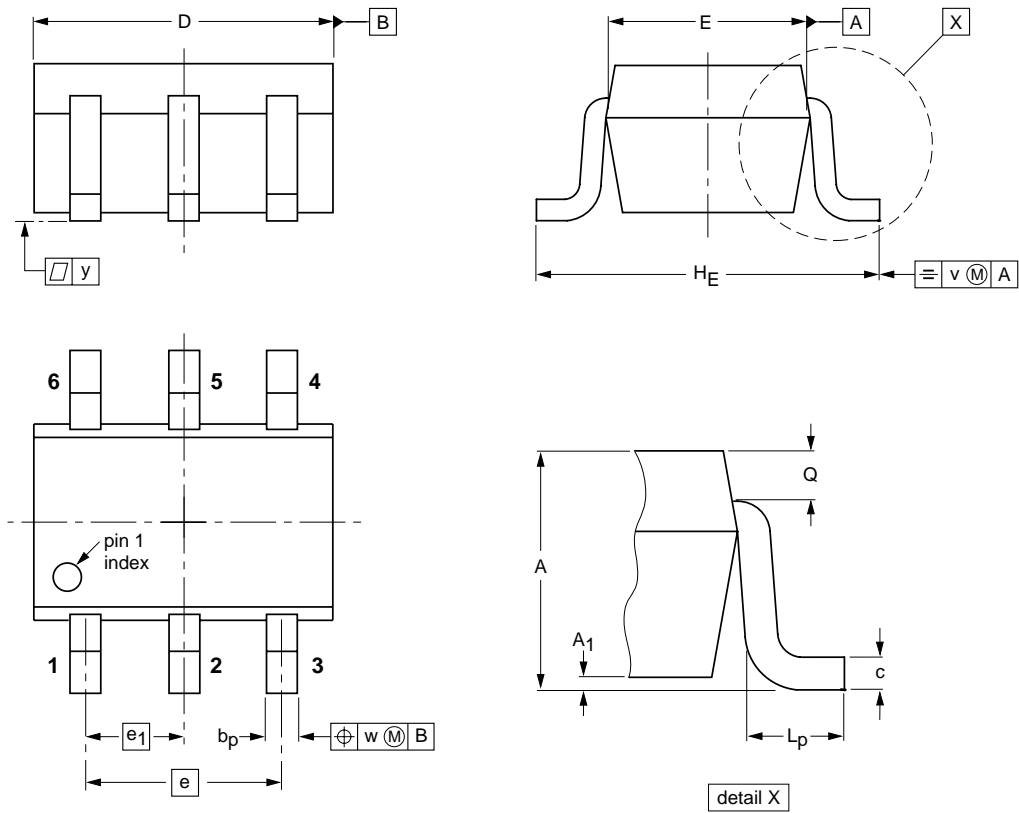

DIMENSIONS (mm are the original dimensions)

UNIT	A	A <sub>1</sub> max	b <sub>p</sub>	c	D	E	e	e <sub>1</sub>	H <sub>E</sub>	L <sub>p</sub>	Q	v	w	y
mm	1.1 0.8	0.1	0.30 0.20	0.25 0.10	2.2 1.8	1.35 1.15	1.3	0.65	2.2 2.0	0.45 0.15	0.25 0.15	0.2	0.2	0.1

Summary of Packing Options

Package	Package Description	Packing Quantity	Industry Standard
SOT-363	Tape/Reel, 7" reel	3000	EIA-481-1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [YFW Electronics manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)  
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [SP000011176](#) [2N2907A](#) [2N3904-](#)  
[NS](#) [2N5769](#) [2SC2412KT146S](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#)  
[CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [30A02MH-TL-E](#) [NTE13](#) [NTE26](#)  
[NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#) [JANTX2N2920L](#) [JANSR2N2222AUB](#) [CMLT3946EG TR](#) [2SA1371D-AE](#)