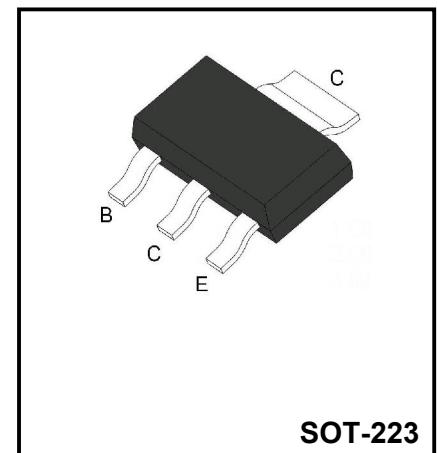


**NPN Plastic-Encapsulate Transistors**
**Application**

- ◆ Power management
  - DC/DC converters
  - Supply line switching
  - Battery charger
  - Linear voltage regulation (LDO).
- ◆ Peripheral drivers
  - Driver in low supply voltage applications, e.g. lamps, LEDs
  - Inductive load driver, e.g. relays, buzzers, motors.


**SOT-223**
**Feature**

- ◆ Low collector-emitter saturation voltage
- ◆ High collector current capability:  $I_C$  and  $I_{CM}$
- ◆ High collector current gain ( $h_{FE}$ ) at high  $I_C$
- ◆ Higher efficiency leading to less heat generation
- ◆ Complement to PBSS4350Z

**Marking: PB4350**
**Absolute Maximum Rating ( $T_C=25^\circ\text{C}$  unless otherwise noted)**

Parameter	Symbol	Value	Unit
Collector-Base Voltage	$BV_{CBO}$	60	V
Collector-Emitter Voltage	$BV_{CEO}$	50	V
Emitter-Base Voltage	$BV_{EBO}$	6	V
Collector Current(DC)	$I_C$	3	A
Peak collector current Current	$I_{CM}$	5	A
Collector Power Dissipation	$P_C$	1.35	W
Junction Temperature	$T_J$	150	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-55~150	$^\circ\text{C}$

**Thermal Characteristics**

Parameter	Symbol	Conditions	Value	Unit
Resistance from junction to ambient in air	$R_{\theta JA}$	in free air; notes 1	92	$^\circ\text{C}/\text{W}$
		in free air; notes 2	62.5	$^\circ\text{C}/\text{W}$

**Notes**

- 1.Device mounted on a printed-circuit board; single sided copper; tinplated; mounting pad for collector 1cm<sup>2</sup>
- 2.Device mounted on a printed-circuit board; single sided copper; tinplated; mounting pad for collector 6cm<sup>2</sup>

**Electrical Characteristics (T<sub>c</sub>=25°C unless otherwise noted)**

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Collector-base breakdown voltage	BV <sub>CBO</sub>	I <sub>C</sub> = 100μA, I <sub>E</sub> = 0	60			V
Collector-emitter breakdown voltage	BV <sub>CEO</sub>	I <sub>C</sub> = 1mA, I <sub>B</sub> = 0	50			V
Emitter-base breakdown voltage	BV <sub>EBO</sub>	I <sub>E</sub> = 100μA, I <sub>C</sub> = 0	6			V
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> = 50V, I <sub>B</sub> = 0			100	nA
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> = 5V, I <sub>C</sub> = 0			100	nA
DC current gain*	h <sub>FE</sub>	V <sub>CE</sub> = 2V, I <sub>C</sub> = 500mA V <sub>CE</sub> = 2V, I <sub>C</sub> = 1A V <sub>CE</sub> = 2V, I <sub>C</sub> = 2A	200 200 100			
Collector-emitter saturation voltage*	V <sub>CE(sat)</sub>	I <sub>C</sub> = 500mA, I <sub>B</sub> = 50mA			-90	mV
		I <sub>C</sub> = 1A, I <sub>B</sub> = 50mA			-170	mV
		I <sub>C</sub> = 2A, I <sub>B</sub> = 200mA			-290	mV
Equivalent on-resistance*	R <sub>CEsat</sub>	I <sub>C</sub> = 2A, I <sub>B</sub> = 200mA			145	mΩ
Base-emitter saturation voltage*	V <sub>BE(sat)</sub>	I <sub>C</sub> = -2A, I <sub>B</sub> = -200mA			-1.2	V
*Base-emitter tunn-on voltage*	V <sub>BE(on)</sub>	V <sub>CE</sub> = 2V, I <sub>C</sub> = 1A			-1.1	V
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = 5V, I <sub>C</sub> = 100mA	100			MHz
Collector capacitance	C <sub>C</sub>	V <sub>CB</sub> = 10V, I <sub>E</sub> =I <sub>e</sub> =0,f=1MHz			30	pF

Note:

\* Pulse test: PW≤300μs, duty cycle≤2% Pulse

Typical Characteristics

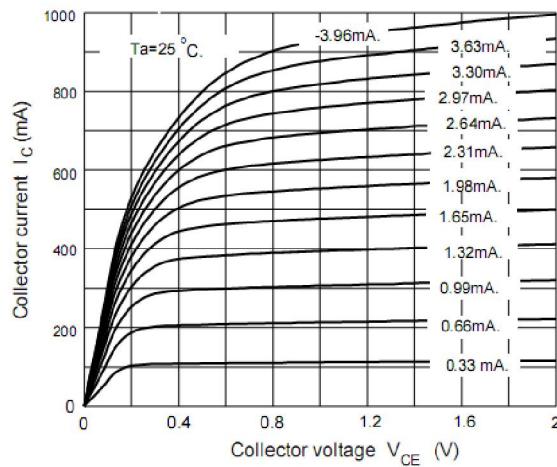


Figure 1. Static Characteristic

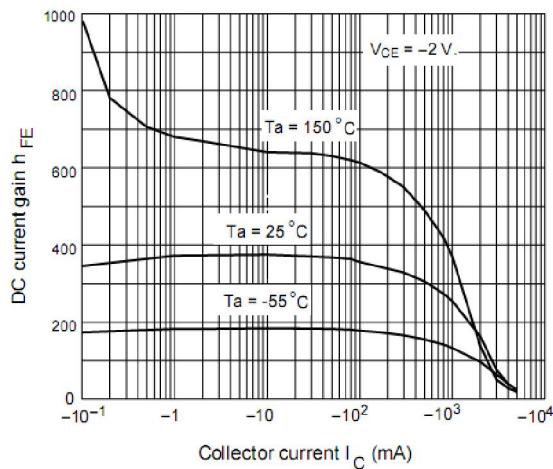


Figure 2. DC current Gain

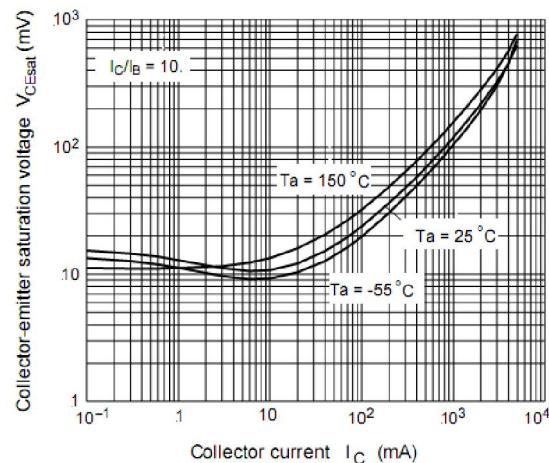


Figure 3. Collector-Emitter Saturation Voltage

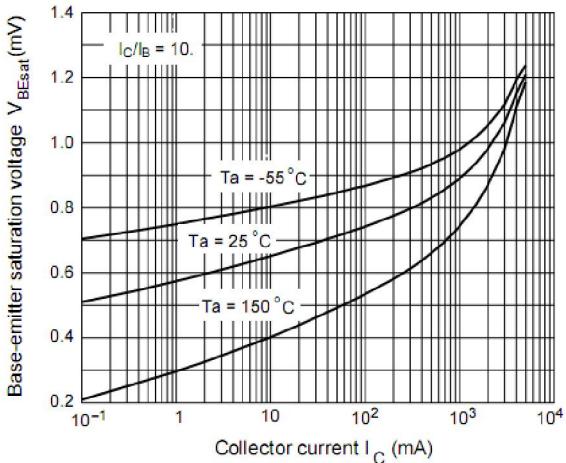


Figure 4. Base-Emitter Saturation Voltage

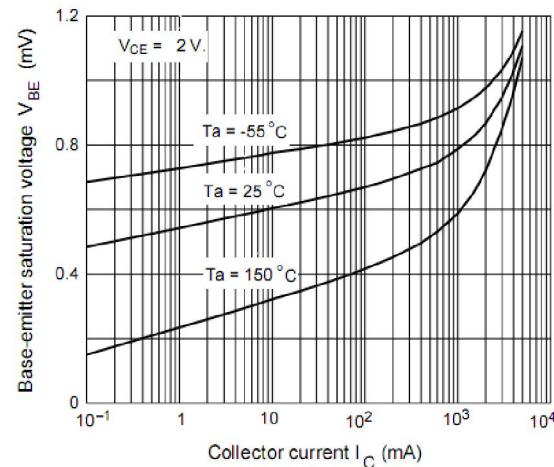


Figure 5. Base-Emitter on Voltage


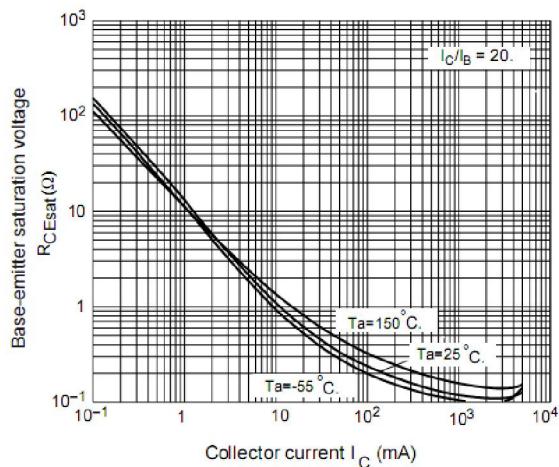


Figure 6. Equivalent on-resistance

Package Outline

SOT-223

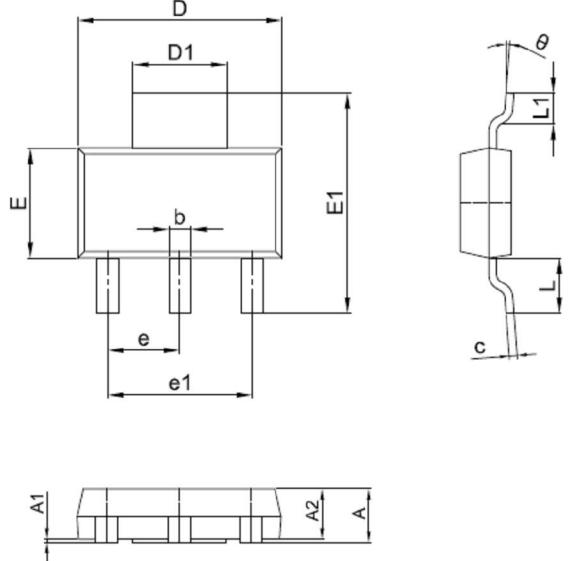

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.50	1.80	0.059	0.071
A1	0.00	0.10	0.000	0.004
A2	1.50	1.70	0.059	0.067
b	0.65	0.75	0.026	0.030
c	0.20	0.30	0.008	0.012
D	6.40	6.60	0.252	0.260
D1	2.90	3.10	0.114	0.122
E	3.30	3.70	0.130	0.146
E1	6.85	7.15	0.270	0.281
e	2.20	2.40	0.087	0.094
e1	4.40	4.80	0.173	0.189
L	1.65	1.85	0.065	0.073
L1	0.90	1.15	0.035	0.045

#### Summary of Packing Options

Package	Package Description	Packing Quantity	Industry Standard
SOT-223	Tape/Reel,7"reel	2500	EIA-481-1

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by YFW Electronics manufacturer:***

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#)