# T1/E1 Isolation Modules

SMD Dual Channel T1/E1 Transformer





**Product Features:** 


- T1/E1/CEPT/ISDN-PR
- UL/EN60950 Recognized
- DEMKO Recognized
- 100% Electrical Testing
- 1500Vrms Hi-Pot
- Patented Open Frame Construction

| Part Number   | Circuit | Temp.<br>Range |            | io (± 2%)<br>SEC | Package<br>Height (max) | PRI OCL<br>(typ) | Primary<br>Pins |
|---------------|---------|----------------|------------|------------------|-------------------------|------------------|-----------------|
| TG08-1205N1LF | A       | 0 to 70°C      | 1CT:2CT    | 1CT:2CT          | 0.2" (5.08)             | 1.2mH            | 1-3 & 6-8       |
| TG24-1205N1LF | A       | 0 to 70°C      | 1CT:1.36CT | 1CT:1.36CT       | 0.2" (5.08)             | 1.2mH            | 16-14 & 6-8     |
| TG26-1205N1LF | Α       | 0 to 70°C      | 1CT:2CT    | 1CT:2CT          | 0.2" (5.08)             | 1.2mH            | 16-14 & 6-8     |
| TG27-1205N1LF | A       | 0 to 70°C      | 1CT:2CT    | 1CT:1.36CT       | 0.2" (5.08)             | 1.2mH            | 16-14 & 6-8     |
| TG38-1205N1LF | Α       | 0 to 70°C      | 1CT:1.15CT | 1CT:1.15CT       | 0.2" (5.08)             | 1.2mH            | 1-3 & 6-8       |
| TG42-1205N1LF | Α       | 0 to 70°C      | 1CT:1.41CT | 1CT:1.41CT       | 0.2" (5.08)             | 1.2mH            | 16-14 & 6-8     |
| TG48-1205N1LF | В       | 0 to 70°C      | 1CT:2CT    | 1:1              | 0.2" (5.08)             | 1.2mH            | 1-3 & 6-8       |
| TG63-1205N1LF | С       | 0 to 70°C      | 1:1.15CT   | 1CT:2CT          | 0.2" (5.08)             | 1.2mH            | 16-14 & 6-8     |
| TG64-1205N1LF | С       | 0 to 70°C      | 1:1:1.26   | 1CT:2CT          | 0.2" (5.08)             | 1.2mH            | 16-14 & 6-8     |
| TG73-1205N5LF | А       | 0 to 70°C      | 1CT:2.3CT  | 1CT:1CT          | 0.250" (6.35)           | 1.2mH            | 16-14 & 6-8     |
| TG74-1205N1LF | А       | 0 to 70°C      | 1CT:1CT    | 1CT:2CT          | 0.2" (5.08)             | 1.2mH            | 16-14 & 6-8     |
| TG80-1205N5LF | А       | 0 to 70°C      | 1CT:2.45CT | 1CT:2.45CT       | 0.250" (6.35)           | 1.2mH            | 16-14 & 6-8     |
| TG08-1505N5LF | А       | -40 to +85°C   | 1CT:2CT    | 1CT:2CT          | 0.250" (6.35)           | 1.5mH            | 1-3 & 6-8       |
| TG23-1505N5LF | D       | -40 to +85°C   | 1:2.42CT   | 1:2.42CT         | 0.250" (6.35)           | 1.5mH            | 1-3 & 6-8       |
| TG24-1505N5LF | А       | -40 to +85°C   | 1CT:1.36CT | 1CT:1.36CT       | 0.250" (6.35)           | 1.5mH            | 16-14 & 6-8     |
| TG26-1505N5LF | А       | -40 to +85°C   | 1CT:2CT    | 1CT:2CT          | 0.250" (6.35)           | 1.5mH            | 16-14 & 6-8     |
| TG27-1505N5LF | Α       | -40 to +85°C   | 1CT:2CT    | 1CT:1.36CT       | 0.250" (6.35)           | 1.5mH            | 16-14 & 6-8     |
| TG38-1505N5LF | А       | -40 to +85°C   | 1CT:1.15CT | 1CT:1.15CT       | 0.250" (6.35)           | 1.5mH            | 1-3 & 6-8       |
| TG42-1505N5LF | Α       | -40 to +85°C   | 1CT:1.41CT | 1CT:1.41CT       | 0.250" (6.35)           | 1.5mH            | 16-14 & 6-8     |
| TG48-1505N5LF | В       | -40 to +85°C   | 1CT:2CT    | 1:1              | 0.250" (6.35)           | 1.5mH            | 1-3 & 6-8       |
| TG63-1505N5LF | С       | -40 to +85°C   | 1:1.15CT   | 1CT:2CT          | 0.250" (6.35)           | 1.5mH            | 16-14 & 6-8     |
| TG64-1505N5LF | С       | -45 to +85°C   | 1:1:1.26   | 1CT:2CT          | 0.250" (6.35)           | 1.5mH            | 16-14 & 6-8     |
| TG73-1505N5LF | А       | -40 to +85°C   | 1CT:2.3CT  | 1CT:1CT          | 0.250" (6.35)           | 1.5mH            | 16-14 & 6-8     |
| TG74-1505N5LF | А       | -40 to +85°C   | 1CT:1CT    | 1CT:2CT          | 0.250" (6.35)           | 1.5mH            | 1-3 & 6-8       |
| TG80-1505N5LF | Α       | -40 to +85°C   | 1CT:2.45CT | 1CT:2.45CT       | 0.250" (6.35)           | 1.5mH            | 16-14 & 6-8     |
| TG91-1505N5LF | А       | -40 to +85°C   | 1CT:2.4CT  | 1CT:1CT          | 0.250" (6.35)           | 1.5mH            | 1-3 & 6-8       |


For additional information contact your local representative, or HALO's support staff at (650) 903-3800 or info@haloelectronics.com

### HALO Dual Channel T1/E1 Transformer







#### Circuit C




Circuit B



#### Circuit D



#### Mechanical

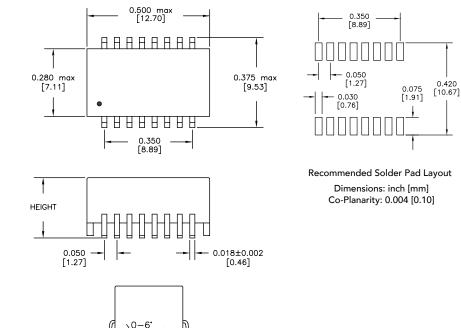

0.010 typ [0.25]

Patented Construction US Patent Numbers: 5,656,985 6,297,721 B1 6,297,720 B1 6,320,489 B1 6,344,785 B1 6,662.431 B1

> ELECTRONICS, INC. 2880 Lakeside Drive #116 Santa Clara, CA 95054 (650) 903-3800 www.haloelectronics.com

0.015/0.025 [0.38/0.64]

HALO<sup>®</sup> Electronics is a leading supplier of high quality communication magnetics including signal transformers, filters, CMR chokes, PoE power transformers, DC/DC converters, and integrated Ethernet connectors. HALO's leading edge technology solutions are manufactured in ISO9001 and ISO14001 factories offering high quality products at a competitive price.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Transformers Audio & Signal category:

Click to view products by Hakko manufacturer:

Other Similar products are found below :

CX2041NLT MGPWT-00449-P PL2615NL H1302FNLT H5012FNL H5077NLT H5084FNLT E4001NLT BX1194WNL HX2260FNL HX5014FNL PA2437NL EX2024FNL T1049NL PE-65848FNLT PE-68023NL PH0905NL H1174FNL H1302FNL H5015FNL H5062FNLT CX2047LNL MGPWT-00266-P MGPWT-00278-P MGPWT-00431-P BX1194WNLT HX5019FNL HX5084NL TX1263NLT 4-1879391-0 PA0173NLT PA1284NLT T1142NL T60403-Y4021-X115 HX6101FNL HX1148NL HX5020FNLT HX5014FNLT T1124NL B8846NL TX1267NLT TX1341NL H0013FNL H1270FNLT H2009FNL H5008FNLT H7008FNLT H5004NLT H5084FNL H7008FNL