



BC846 TRANSISTOR (NPN)
BC847
BC848
Equivalent Circuit:

SOT-23

1.BASE
2.EMITTER
3.COLLECTOR
FEATURES:

- ※ Ideally suited for automatic insertion
- ※ For switching and AF amplifier applications

MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	VCBO	BC846 80	V
		BC847 50	
		BC848 30	
Collector-Emitter Voltage	VCEO	BC846 65	V
		BC847 45	
		BC848 30	
Emitter-Base Voltage	VEBO	6	V
Collector Current	IC	0.1	A
Collector Power Dissipation	PC	200	mW
Thermal Resistance From Junction To Ambient	RθJA	625	°C/W
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-55~+150	°C


DEVICE MARKING:
BC846A=1A; BC846B=1B
BC847A=1E; BC847B=1F; BC847C=1G
BC848A=1J; BC848B=1K; BC848C=1L

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Collector-base breakdown voltage BC846 BC847 BC848	V(BR)CBO	IC= 10μA, IE=0	80 50 30			V
Collector-emitter breakdown voltage BC846 BC847 BC848	V(BR)CEO	IC= 10mA, IB=0	65 45 30			V
Emitter-base breakdown voltage	V(BR)EBO	IE=10μA, IC=0	6			V
Collector cut-off current BC846 BC847 BC848	ICBO	VCB=70 V , IE=0 VCB=50 V , IE=0 VCB=30 V , IE=0			0.01	μA
Emitter cut-off current	IEBO	VEB= 5V , IC=0			0.1	μA
DC current gain BC846A; 847A; 848A BC846B; 847B; 848B BC847C; BC848C	hFE	VCE=5V, IC= 2mA	110 200 420		220 450 800	
Collector-emitter saturation voltage	VCE(sat)	IC=100 mA, IB= 5mA			0.5	V
Base-emitter saturation voltage	VBE(sat)	IC=100 mA, IB= 5mA			1.1	V
Transition frequency	fT	VCE=5V, IC= 10mA f=100MHz	100			MHz
Collector Current Capacitance	Cob	VCE=10V, f=1MHz			4.5	pF

CLASSIFICATION OF hFE

Rank	L	H	J
Range	120-200	200-350	300-400

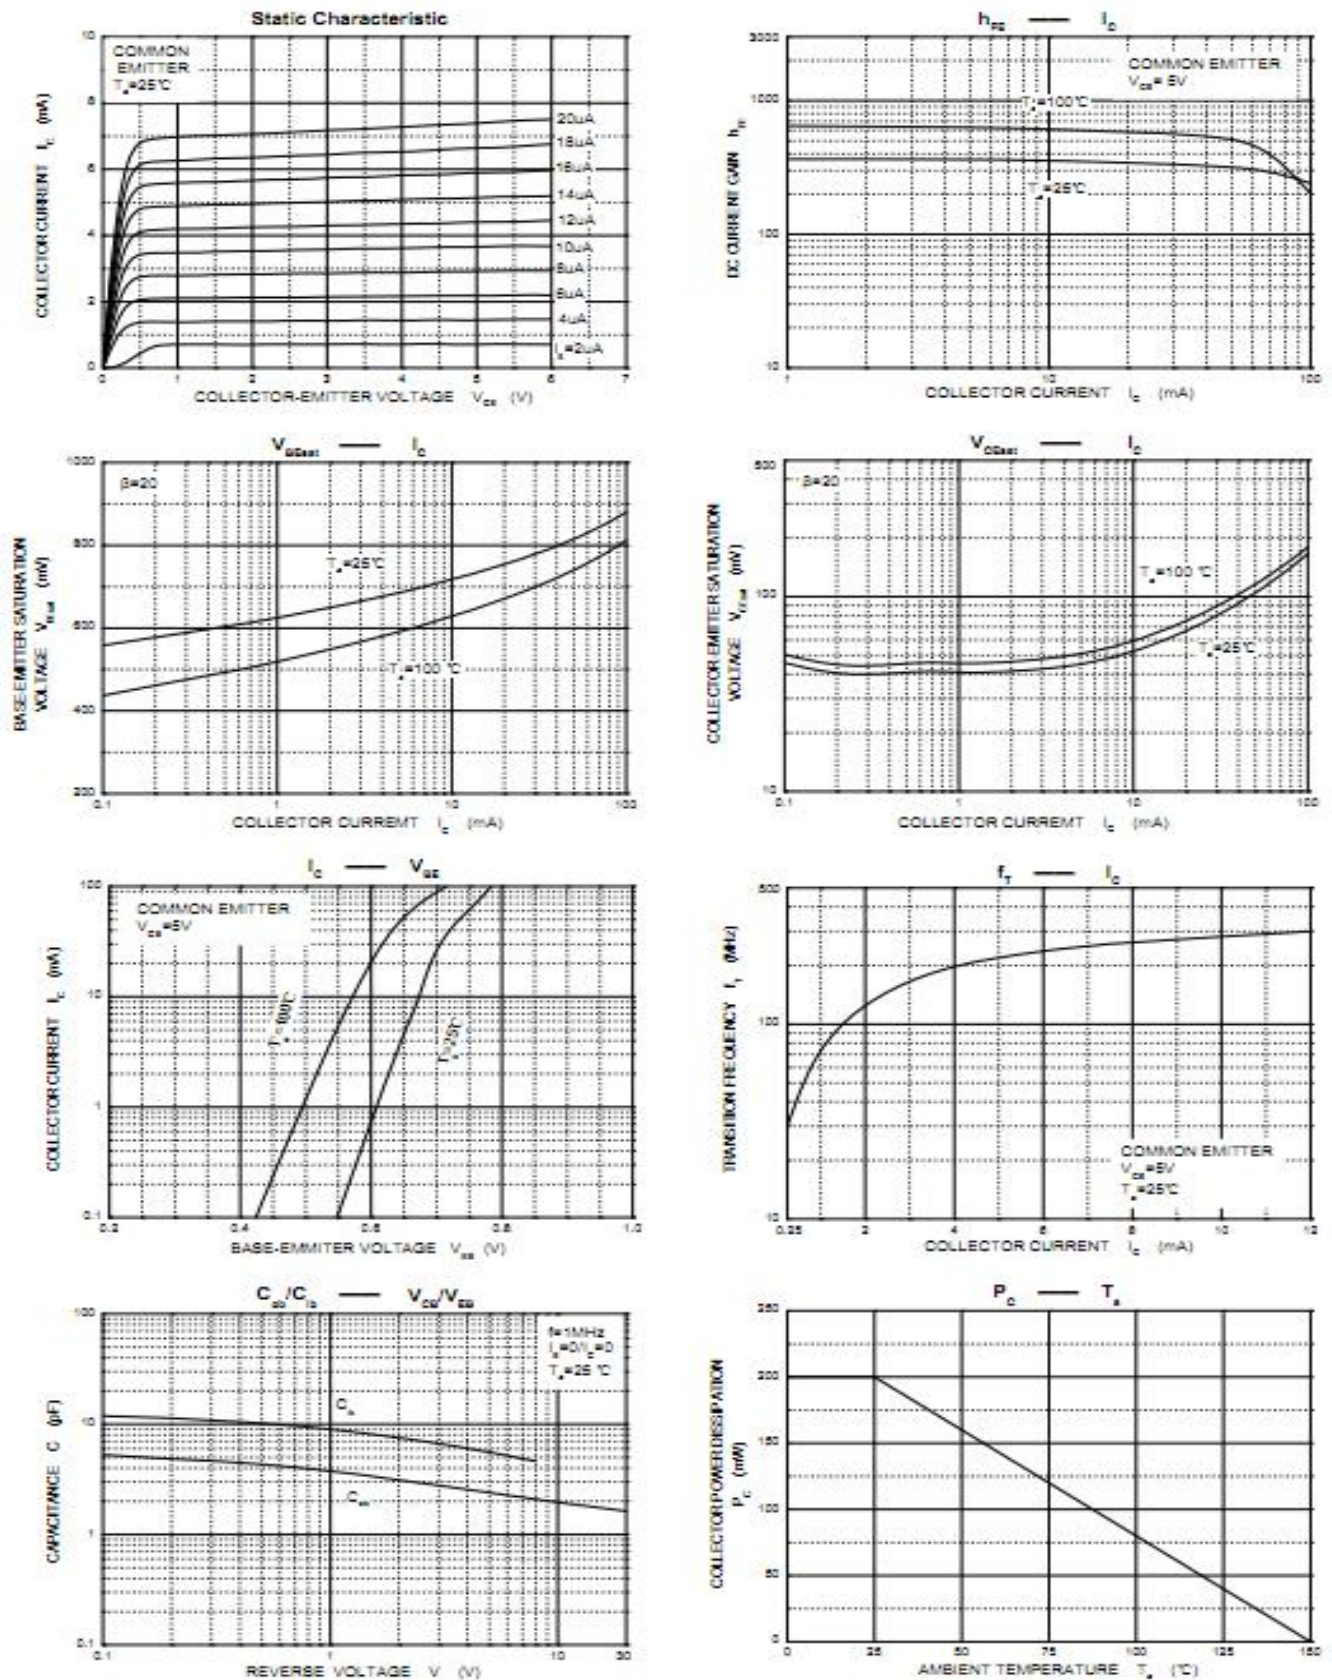TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Yongyutai Electronics manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [SP000011176](#) [2N2907A](#) [2N3904-](#)
[NS](#) [2N5769](#) [2SC2412KT146S](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#)
[CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [30A02MH-TL-E](#) [NTE13](#) [NTE26](#)
[NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#) [JANTX2N2920L](#) [JANSR2N2222AUB](#) [CMLT3946EG TR](#) [2SA1371D-AE](#)