


BCP54/55/56

Features

- For AF driver and output stages
- High collector current
- Low collector-emitter saturation voltage
- Complementary types: BCP51/BCP52/BCP53 (PNP)

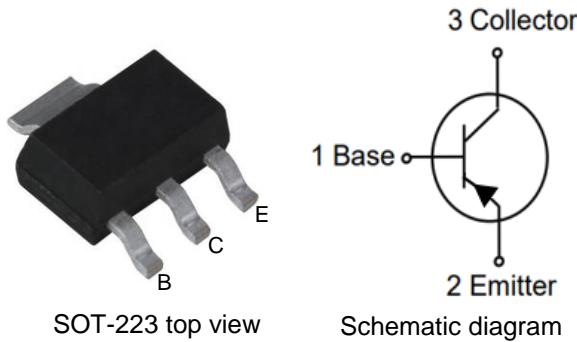

Maximum Ratings(Ta=25°C unless otherwise noted)

Symbol	Parameter	BCP54	BCP55	BCP56	Unit
V_{CBO}	Collector-Base Voltage	45	60	100	V
V_{CEO}	Collector-Emitter Voltage	45	60	80	V
V_{EBO}	Emitter-Base Voltage		5		V
I_C	Collector Current -Continuous		1		A
I_{CM}	Peak Pulse Collector Current		2		A
I_B	Base Current-Continuous		100		mA
I_{BM}	Peak Pulse Base Current		200		mA
P_C	Collector Power Dissipation		1.5		W
$R_{\Theta JA}$	Thermal Resistance From Junction To Ambient		83.3		°C/W
T_J, T_{stg}	Operation Junction and Storage Temperature Range		-55~+150		°C









Electrical Characteristics (TJ=25°C unless otherwise noted)



Symbol	Parameter		Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage		$I_C=100\mu A, I_E=0$	45	--	--	V
	BCP54	60		--	--		
	BCP55	100		--	--		
$V_{(BR)CEO}$	Collector-emitter breakdown voltage		$I_C=10mA, I_B=0$	45	--	--	V
	BCP54	60		--	--		
	BCP56	80		--	--		
$V_{(BR)EBO}$	Emitter-base breakdown voltage		$I_E=10\mu A, I_C=0$	5	--	--	V
I_{CBO}	Collector cut-off current		$V_{CB}=30V, I_E=0$	--	--	100	nA
h_{FE1}	DC current gain		$V_{CE}=2V, I_C= 5mA$	25	--	--	--
h_{FE2}			$V_{CE}=2V, I_C= 150mA$	63	--	250	
h_{FE3}			$V_{CE}=2V, I_C= 500mA$	25	--	--	
$V_{CE(sat)}$	Collector-emitter saturation voltage		$I_C=500 mA, I_B= 50mA$	--	--	0.5	V
f_T	Transition frequency		$V_{CE}=10V, I_C= 50mA, f=100MHz$	100	--	--	MHz
V_{BE}	Base-emitter voltage		$V_{CE}=2V, I_C= 500mA$	--	--	1	V

Ordering Information (Example)

Type	Hfe	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
BCP54	63-160	BCP54-10	2,500	5,000	35,000	13"reel
	100-250	BCP54-16				
BCP55	63-160	BCP55-10	2,500	5,000	35,000	13"reel
	100-250	BCP55-16				
BCP56	63-160	BCP56-10	2,500	5,000	35,000	13"reel
	100-250	BCP56-16				

Typical Operating Characteristics

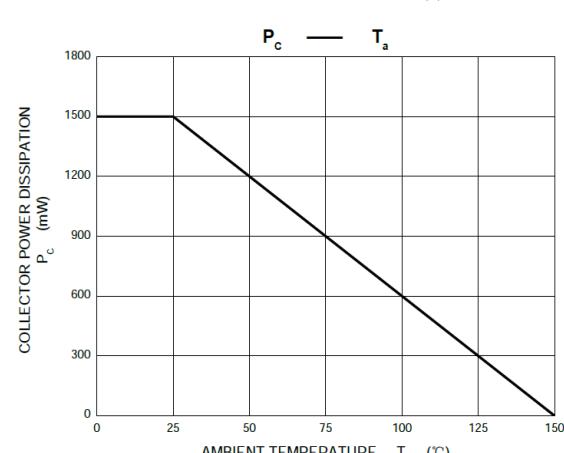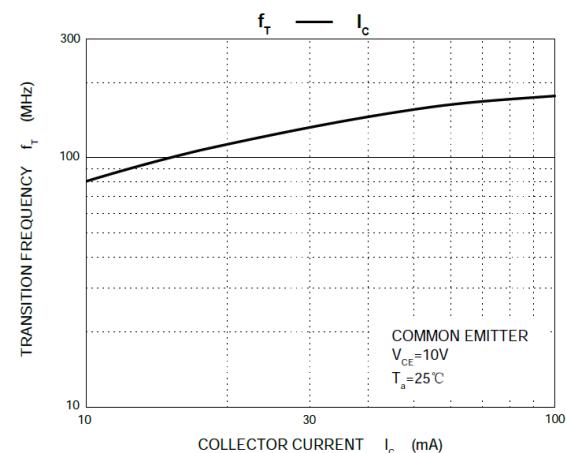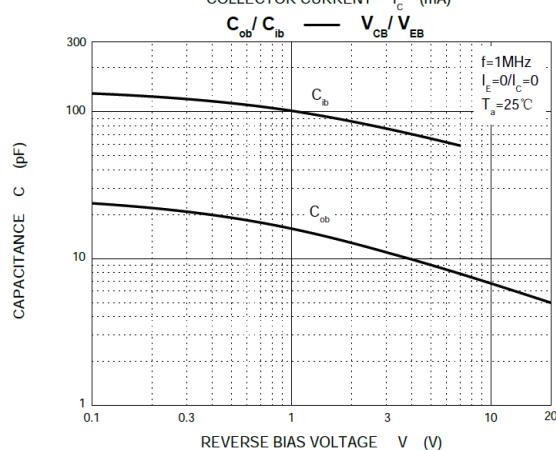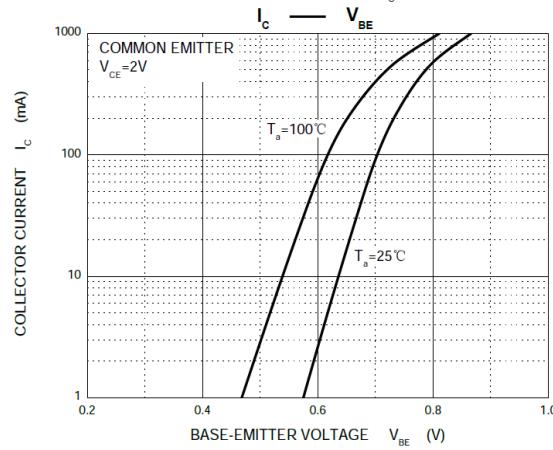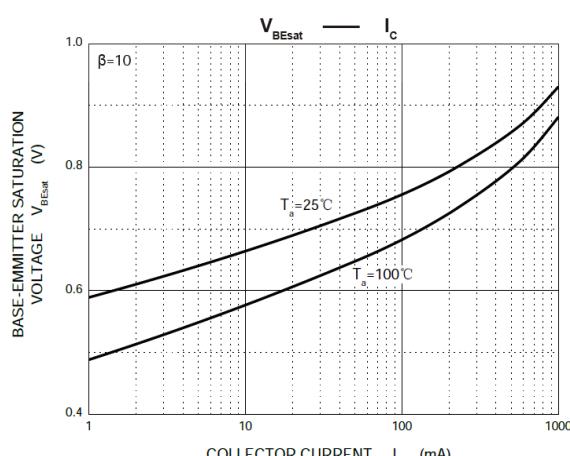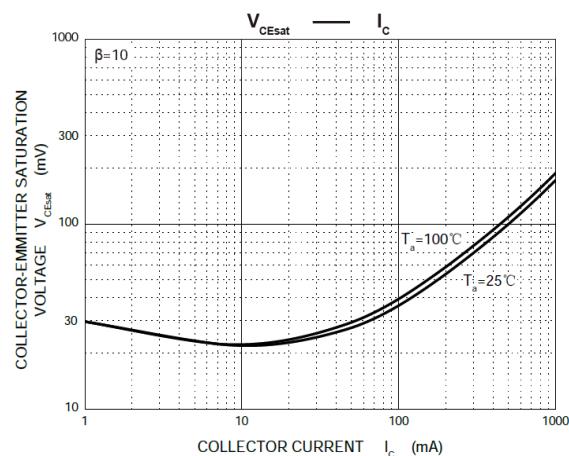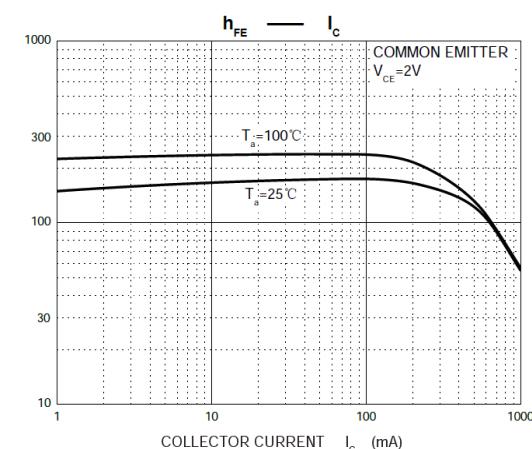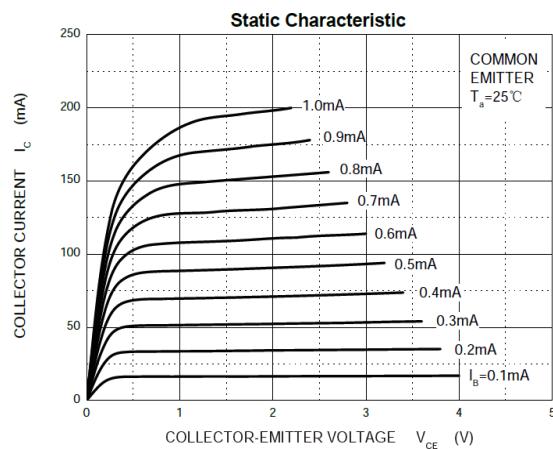

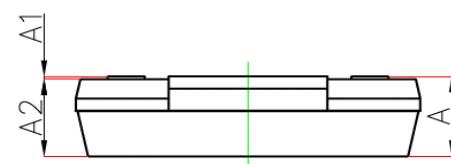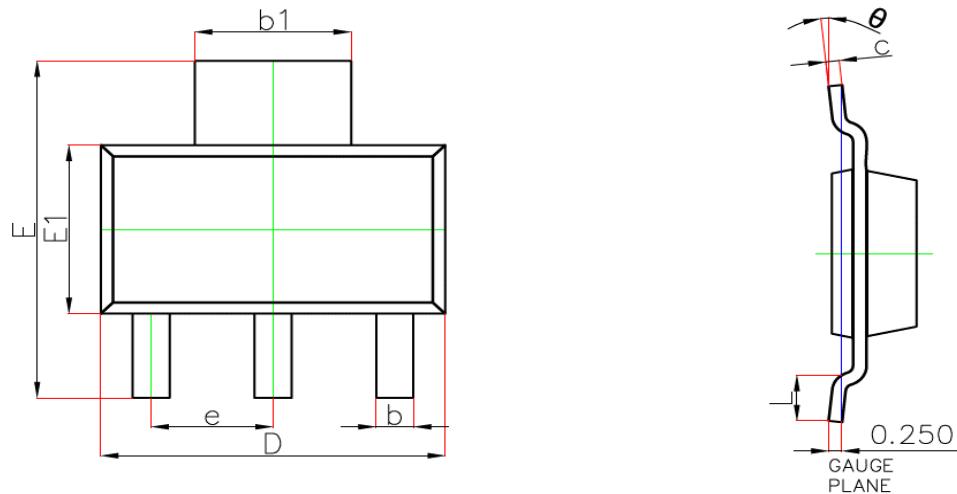SOT-223 Package information


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500TYP		0.020TYP	
e1	0.900	1.100	0.035	0.043
L	0.400REF		0.016REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Yongytai Electronics manufacturer:

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)
[MMDT3946FL3-7](#) [2N4240](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#)